




#### **UROLOGY**

	LOWER URINARY TRACT
2	UPPER URINARY TRACT
3	PEDIATRIC UROLOGY
4	AUXILIARY INSTRUMENTS
5	LAPAROSCOPY



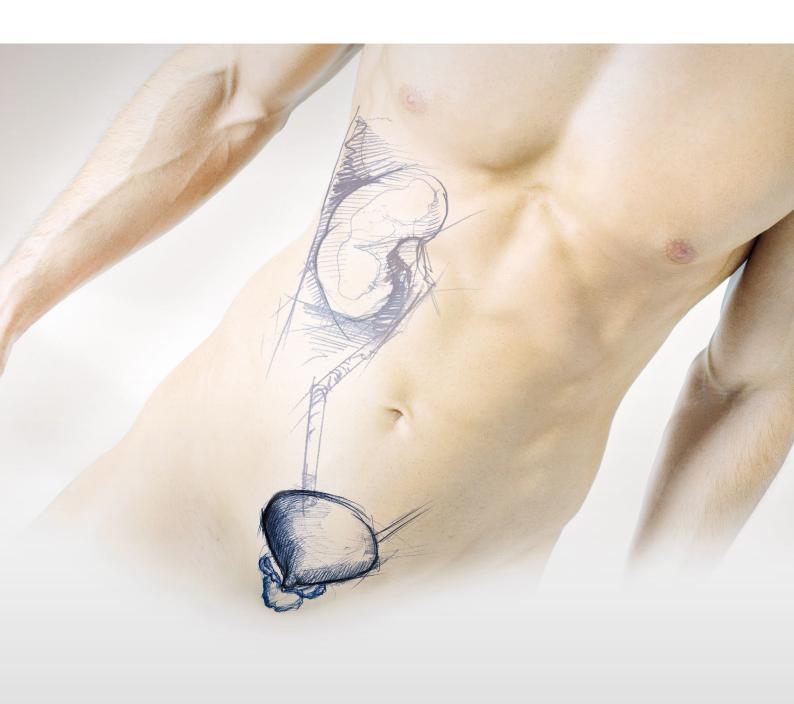

**LOWER URINARY TRACT** 



#### **LOWER URINARY TRACT**

BASIC SETS/OVER	RVIEW OF PANOVIEW TELESCOPES
URETHROTOMY	
OPTICAL URETHRO	OTOMES
URETHROTOME F	OR BLIND SLITTING
CYSTOSCOPY	
CYSTO-URETHROS	SCOPE 8650
"MIDI-SIZE" CYST	TO-URETHROSCOPE
ATRAUMATIC CON	MPACT CYSTO-URETHROSCOPE
FLEXIBLE FIBER C	CYSTOSCOPE
"VISION EF" FLEX	IBLE SENSOR CYSTOSCOPES
"MAMBA" FLEXIBI	LE SENSOR CYSTOSCOPES
"SYSTEM BLUE" F	FOR PHOTODYNAMIC DIAGNOSTICS (PDD)
TRANSURETHRAL	. RESECTION (TUR)
"SHARK" RESECTO	OSCOPES (MONOPOLAR/BIPOLAR)
"E-LINE" RESECTO	OSCOPE, LONG SHEATH
"MIDI-SIZE" RESE	:CTOSCOPE
"SYSTEM BLUE" F	FOR PHOTODYNAMIC DIAGNOSTICS (PDD)
"SHARK" ELECTRO	ODES (MONOPOLAR/BIPOLAR) – "E-LINE" ELECTRODES
ACCESSORIES FO	OR RESECTOSCOPE SHEATHS



#### **LOWER URINARY TRACT**

ANATOMIC ENDOSCOPIC ENUCLEATION OF THE PROSTATE (AEEP)
LASER ENUCLEATION (HoLEP/ThuLEP/GreenLEP)
BIPOLAR ENUCLEATION (BipoLEP)
MORCELLATION
"SHARK" MORCESCOPE
"PIRANHA" MORCELLATION SYSTEM
LASER ENERGY SOURCES
"MEGA PULSE 70+" HOLMIUM:YAG LASER (Ho:YAG)
"PULVIS 60+" THULIUM FIBER LASER (TFL)
HF ENERGY SOURCES
HF GENERATOR 2260
HF CONNECTION CABLE
SUCTION IRRIGATION PUMP
FLUID CONTROL 2225



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### BASIC EQUIPMENT FOR CYSTOSCOPY

CYSTO-URETHROSCOPES 8650

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Sheath for cystoscope 19.5 FR	8650.0341	1	
Adapter for cystoscope	8650.264	1	
Working insert for cystoscope 0/30/70	8650.204	1	
Universal sealing valve 1–6 FR	4712348	1	
Viewing obturator for cystoscope 19.5 FR	8650.724	1	
Opt. biopsy forceps, "Marburg" model	8650.614	1	Urology/Cystoscopes
Opt. grasping forceps, straight	8650.684	1	
Telescope 0° Ø 4 mm WL 298 mm	8650.414	1	
Telescope 70° Ø 4 mm WL 302 mm	8650.415	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	
Bladder syringe 150 ml Ø 54 mm	822.31	1	
Flexible adapter for bladder syringe	822.13	1	
Perforated basket for standard telescope 2	38016	1	
Container (W x H x D) 400 x 60 x 200 mm	33022	1	Hygiene



#### BASIC EQUIPMENT FOR TUR

RESECTOSCOPE, MONOPOLAR TELESCOPE 4 MM, 12°/30° 24/26 FR, ACTIVE, CONTINUOUS IRRIGATION

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Outer sheath for resectoscope 26 FR	8675426	1	
Inner sheath for resectoscope 24 FR	8675324	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Obturator for resectoscope 24 FR	8673024	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Working element, active, bipo 0/12/30°	8680.205	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	Harlana (Danashanana
Telescope blue 12° Ø 4 mm WL 298 mm	8654.531	1	Urology/Resectoscopes
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope blue 30° Ø 4 mm WL 299 mm	8654.522	1	
Cutting electrode mono 24 FR 12/30°	46782435	1	
Coag. electrode mono 22–24 FR 12/30°	46782201	1	
Protective sterilization sleeve	33030	1	
HF monopolar connection cable	see URO103/104	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	- Urology/Urethrotomes
Knife for urethrotome	8517.90	1	
Irrigation pump for HYS/URO/LAP bndl	22250011	1	Urology/Resectoscopes
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	



IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### BASIC EQUIPMENT FOR TUR

TELESCOPE 4 MM, 0°

24 ED DASSIVE INTERMITTENT INDICATION

24 FR, PASSIVE, INTERMITTENT IRRIGATION WITH CENTRAL STOPCOCK

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Sheath for resectoscope 24 FR	8676424	1	
Connection part for resectoscope 24 FR	8676342	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Obturator for resectoscope 24 FR	8673024	1	
Working element, passive, mono 0°	8681224	1	Urology/Resectoscopes
Telescope 0° Ø 4 mm WL 298 mm	8650.414	1	
Telescope blue 0° Ø 4 mm WL 298 mm	8650.514	1	
Cutting electrode mono 24 FR 0°	46792435	1	
Protective sterilization sleeve	33030	1	
HF monopolar connection cable	see URO103/104	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	
Knife for urethrotome	8517.90	1	Urology/Urethrotomes
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	

#### BASIC EQUIPMENT FOR TUR

RESECTOSCOPE, MONOPOLAR TELESCOPE 4 MM, 0°

24 FR, PASSIVE, INTERMITTENT IRRIGATION WITH ROTATABLE IRRIGATION ADAPTER

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Sheath for resectoscope 24 FR	8676324	1	
Irrigation adapter for resectoscope 24/26 FR with 4 mm Luer connection	8676354	1	
Irrigation adapter for resectoscope 24/26 FR with 3 mm Luer connection with stopcock	8676361	1	
Two-way stopcock, maintenance-free	88351	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Obturator for resectoscope 24 FR	8673024	1	Urology/Resectoscopes
Working element, passive, mono 0°	8681224	1	
Telescope 0° Ø 4 mm WL 298 mm	8650.414	1	
Telescope blue 0° Ø 4 mm WL 298 mm	8650.514	1	
Cutting electrode mono 24 FR 0°	46792435	1	
Protective sterilization sleeve	33030	1	
HF monopolar connection cable	see URO103/104	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	- Urology/Urethrotomes
Knife for urethrotome	8517.90	1	
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	



#### BASIC EQUIPMENT FOR TUR

RESECTOSCOPE, BIPOLAR
TELESCOPE 4 MM, 12°/30°
22/24 FR, ACTIVE, CONTINUOUS IRRIGATION

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Outer sheath for resectoscope 24 FR	8675424	1	
Inner sheath for resectoscope 22 FR	8675322	1	
Viewing obturator for resectoscope 22 FR	8673122	1	
Obturator for resectoscope 22 FR	8673022	1	
Working element, active, bipo 0/12/30°	8680.205	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	
Telescope blue 12° Ø 4 mm WL 298 mm	8654.531	1	Urology/Resectoscopes
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope blue 30° Ø 4 mm WL 299 mm	8654.522	1	
Cutting electrode bipo 22 FR 12/30°	4622.1333	1	
Coag. electrode bipo 22 FR 12/30°	4623.0243	1	
BiVAP-Elektrode bipo 22 FR 12/30°	46300223	1	
HF bipolar connection cable	see URO105	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	Urology/Urethrotomes
Knife for urethrotome	8517.90	1	
Irrigation pump for HYS/URO/LAP bndl	22250011	1	Urology/Resectoscopes
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	



#### BASIC EQUIPMENT FOR TUR

RESECTOSCOPE, BIPOLAR
TELESCOPE 4 MM, 12°/30°
24/26 FR, ACTIVE, CONTINUOUS IRRIGATION

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Outer sheath for resectoscope 26 FR	8675426	1	
Inner sheath for resectoscope 24 FR	8675324	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Obturator for resectoscope 24 FR	8673024	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Working element, active, bipo 0/12/30°	8680.205	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	Harlana (Danashanana
Telescope blue 12° Ø 4 mm WL 298 mm	8654.531	1	Urology/Resectoscopes
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope blue 30° Ø 4 mm WL 299 mm	8654.522	1	
Coag. electrode bipo 22 FR 12/30°	4623.0243	1	
BiVAP-Elektrode bipo 22 FR 12/30°	46300223	1	
BiVAP-Elektrode bipo 24–26 FR 12/30°	46300243	1	
HF bipolar connection cable	see URO105	1	-
Urethrotome 15–45 FR WL 236 mm	8517.00	1	Urology/Urothrotomog
Knife for urethrotome	8517.90	1	- Urology/Urethrotomes
Irrigation pump for HYS/URO/LAP bndl	22250011	1	Urology/Resectoscopes
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### BASIC EQUIPMENT FOR TUR

RESECTOSCOPE, BIPOLAR TELESCOPE 4 MM, 12°

24 FR, ACTIVE, INTERMITTENT IRRIGATION WITH CENTRAL STOPCOCK

Product	Product no.	Quantity	Catalog/Section
Endoscopes and instruments			
Outer sheath for resectoscope 26 FR	8675426	1	
Inner sheath for resectoscope 24 FR	8675324	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Obturator for resectoscope 24 FR	8673024	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Working element, active, bipo 0/12/30°	8680.205	1	- Urology/Resectoscopes
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	
Telescope blue 12° Ø 4 mm WL 298 mm	8654.531	1	
Coag. electrode bipo 22 FR 12/30°	4623.0243	1	
BiVAP-Elektrode bipo 22 FR 12/30°	46300223	1	
BiVAP-Elektrode bipo 24–26 FR 12/30°	46300243	1	
HF bipolar connection cable	see UR0105	1	
Urethrotome 15–45 FR WL 236 mm	8517.00	1	- Urology/Urethrotomes
Knife for urethrotome	8517.90	1	
Irrigation pump for HYS/URO/LAP bndl	22250011	1	Urology/Resectoscopes
Bladder syringe 150 ml Ø 54 mm	822.31	1	Urology/Auxiliary instruments
Flexible adapter for bladder syringe	822.13	1	



# WOLF

spirit of excellence

### BASIC LASER ENUCLEATION SET I

STANDARD LASER RESECTOSCOPE 24/26 FR

Product	Product no.	Quantity	Catalog/Section
"PIRANHA" morcellator			
Suction pump bndl	22080019	1	
Tube for suction	41702208	1	
Collecting container	2208120	1	
Motor Control Unit 2303	2303.001	1	
Also: Power cable	2440.03	1	Urology/Laser enucleation
Motor handpiece max. 6,000 rpm	8564122	1	
Rotary morcellator Ø 4.8 mm WL 335 mm	49700113	1	
Rotary morcellator Ø 4.8 mm WL 385 mm for morcellator telescopes from other manufacturers	49700103	1	
Laser resectoscope 24/26 Fr			
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	
Also: <b>Fiber light cable bndl</b> , Ø 2.5 mm, 2.3 m long	806625231	1	
for reprocessing: Perforated basket for standard telescope 2	38016	1	
Laser working element, passive 12/30°	8654382	1	
Alternative: Laser working insert 12/30°	8654383	1	Urology/Laser enucleation
Guide tube laser therapy 1,000 µm 24 FR	8654991	1	
Guide tube laser therapy 600 µm 24 FR	8654993	1	
Guide tube laser therapy 600 µm 24 FR	8654995	1	
Guide tube laser therapy 600 µm 24 FR	8654997	1	
Curette 22–24 FR for prostate chips	8654998	1	



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# Holep, Thulep Basic Laser enucleation set I

STANDARD LASER RESECTOSCOPE 24/26 FR

Product	Product no.	Quantity	Catalog/Section	
Laser resectoscope 24/26 Fr				
Outer sheath for resectoscope 26 FR	8675426	1	Urology/Laser enucleation	
Inner sheath for resectoscope 24 FR	8675324	1		
Obturator for resectoscope 24 FR	8673024	1		
Viewing obturator for resectoscope 24 FR	8673124	1		
Dilatations obturator f. resectoscope 24 FR	8673224	1		
MORCESCOPE				
Morcescope 0° 24 FR WL 199 mm	8970407	1	Urology/Laser enucleation	
Autom. sealing element ID 5.7 mm	8920.311	1		
Pressure ball	103.00	1		
Tube with LUER-LOCK connector	886.00	1		
Cleaning brush Ø 11 mm TL 360 mm	6.01	1		
Also:				
Fiber light cable bndl Ø 3.5 mm, 2.3 m long	806635231	1		
Perforated basket for Morcescope with small part basket	38012	1		



## **Shark**HOLEP, THULEP BASIC LASER ENUCLEATION SET II

LASER ENUCLEATION SHEATH FOR **BLUNT** ENUCLEATION 24/26 FR

Product	Product no.	Quantity	Catalog/Section
"PIRANHA" morcellator			
Suction pump bndl	22080019	1	
Tube for suction	41702208	1	
Collecting container	2208120	1	
Motor Control Unit 2303	2303.001	1	
Also: Power cable	2440.03	1	Urology/Laser enucleation
Motor handpiece max. 6,000 rpm	8564122	1	
Rotary morcellator Ø 4.8 mm WL 335 mm	49700113	1	
Rotary morcellator Ø 4.8 mm WL 385 mm for morcellator telescopes from other manufacturers	49700103	1	
Laser resectoscope 24/26 Fr	'		
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	
Also: Fiber light cable bndl, Ø 2.5 mm, 2.3 m long	806625231	1	
for reprocessing: Perforated basket for standard telescope 2	38016	1	
Laser working element, passive 12/30°	8654382	1	
Alternative: Laser working insert 12/30°	8654383	1	Urology/Laser enucleation
Guide tube laser therapy 1,000 µm 24 FR	8654991	1	
Guide tube laser therapy 600 µm 24 FR	8654993	1	
Guide tube laser therapy 600 µm 24 FR	8654995	1	
Guide tube laser therapy 600 µm 24 FR	8654997	1	
Curette 22–24 FR for prostate chips	8654998	1	



# HOLEP, THULEP BASIC LASER ENUCLEATION SET II

#### LASER ENUCLEATION SHEATH FOR **BLUNT** ENUCLEATION

Product	Product no.	Quantity	Catalog/Section
Laser enucleation sheath for blunt enucleation 24/26 Fr			
Outer sheath for resectoscope 26 FR	8675426	1	
Inner sheath for laser therapy 24 FR	8675524	1	
Obturator for resectoscope 24 FR	8673324	1	
Alternative:			Urology/Laser enucleation
Outer sheath for resectoscope 26 FR	8675426	1	Urology/Laser enucleation
Inner sheath for resectoscope 24 FR	8675324	1	
Obturator for resectoscope 24 FR	8673024	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
MORCESCOPE			
Morcescope 0° 24 FR WL 199 mm	8970407	1	
Autom. sealing element ID 5.7 mm	8920.311	1	
Pressure ball	103.00	1	
Tube with LUER-LOCK connector	886.00	1	
Cleaning brush Ø 11 mm TL 360 mm	6.01	1	- Urology/Laser enucleation
Also:			
Fiber light cable bndl Ø 3.5 mm, 2.3 m long	806635231	1	
Perforated basket for Morcescope with small part basket	38012	1	



## **Shark**HOLEP, THULEP BASIC LASER ENUCLEATION SET III

STANDARD LASER RESECTOSCOPE 24/26 FR AND BIPOLAR RESECTION

Product	Product no.	Quantity	Catalog/Section
"PIRANHA" morcellator			
Suction pump bndl	22080019	1	
Tube for suction	41702208	1	
Collecting container	2208120	1	
Motor Control Unit 2303	2303.001	1	
Also: Power cable	2440.03	1	Urology/Laser enucleation
Motor handpiece max. 6,000 rpm	8564122	1	
Rotary morcellator Ø 4.8 mm WL 335 mm	49700113	1	
Rotary morcellator Ø 4.8 mm WL 385 mm for morcellator telescopes from other manufacturers	49700103	1	
Laser resectoscope 24/26 Fr			
Telescope 30° Ø 4 mm WL 300 mm	8654.422	1	
Telescope 12° Ø 4 mm WL 297 mm	8654.431	1	
Also:  Fiber light cable bndl, Ø 2.5 mm, 2.3 m long	806625231	1	
for reprocessing: Perforated basket for standard telescope 2	38016	1	
Laser working element, passive 12/30°	8654382	1	
Alternative: Laser working insert 12/30°	8654383	1	Urology/Laser enucleation
Guide tube laser therapy 1,000 µm 24 FR	8654991	1	
Guide tube laser therapy 600 µm 24 FR	8654993	1	
Guide tube laser therapy 600 µm 24 FR	8654995	1	
Guide tube laser therapy 600 µm 24 FR	8654997	1	
Curette 22–24 FR for prostate chips	8654998	1	



# HOLEP, THULEP BASIC LASER ENUCLEATION SET III


#### STANDARD LASER RESECTOSCOPE 24/26 FR AND BIPOLAR RESECTION

Product	Product no.	Quantity	Catalog/Section
Laser resectoscope 24/26 Fr			
Outer sheath for resectoscope 26 FR	8675426	1	Urology/Laser enucleation
Inner sheath for resectoscope 24 FR	8675324	1	
Obturator for resectoscope 24 FR	8673024	1	
Viewing obturator for resectoscope 24 FR	8673124	1	
Dilatations obturator f. resectoscope 24 FR	8673224	1	
Bipolar resectoscope 24/26 Fr			
Working element, active, bipo 0/12/30	8680.205	1	
Optional: working element, passive, bipo 0/12/30°	8680.225	1	
Cutting electrode bipo 24 FR 12/30°	4622.1313	1	
Coag. electrode bipo 24–26 FR 12/30°	4623.0223	1	- Urology/Laser enucleation
HF bipolar connection cable L 3 m	8108.232	1	
HF bipolar connection cable L 5 m	8108.252	1	
HF bipolar connection cable L 3 m	8108.231	1	
HF bipolar connection cable L 3 m	8108.251	1	
Morcescope			
Morcescope 0° 24 FR WL 199 mm	8970407	1	
Autom. sealing element ID 5.7 mm	8920.311	1	
Pressure ball	103.00	1	
Tube with LUER-LOCK connector	886.00	1	
Cleaning brush Ø 11 mm TL 360 mm	6.01	1	Urology/Laser enucleatio
Also:			
Fiber light cable bndl Ø 3.5 mm, 2.3 m long	806635231	1	
Perforated basket for Morcescope with small part basket	38012	1	



#### **TELESCOPES**

#### **OVERVIEW**

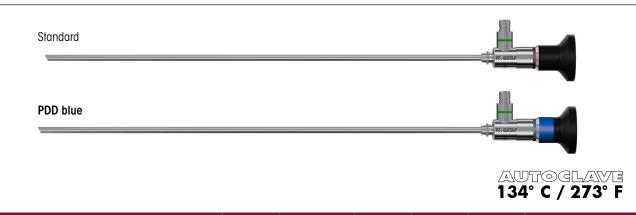

	Direction of view	Color coding	Ø	WL	TL	Product no.
Telescope 0° Ø 4 mm WL 298 mm	O° Blue	4.0 mm	298 mm	365 mm	8650.414	
Telescope blue 0° Ø 4 mm WL 298 mm	U	Blue 4.0 mm	298 mm	365 mm	8650.514**	
Telescope 12° Ø 4 mm WL 297 mm	12°	Orango	4.0 mm	297 mm	363 mm	8654.431
Telescope blue 12° Ø 4 mm WL 298 mm	12	Orange	Ordinge 4.0 mm	298 mm	363 mm	8654.531**
Telescope 30° Ø 4 mm WL 300 mm		4.0 mm	300 mm	364 mm	8654.422	
Telescope blue 30° Ø 4 mm WL 299 mm	30°		4.0 111111	299 mm	364 mm	8654.522**
Telescope 30° Ø 3.3 mm WL 299 mm		Reu	3.3 mm	299 mm	360 mm	8656.422
Telescope 25° Ø 4 mm WL 342 mm	25°		4.0 mm	342 mm	404 mm	8668.433*
Telescope 70° Ø 4 mm WL 302 mm	70°	Yellow	4.0 mm	302 mm	364 mm	8650.415
Telescope blue 70° Ø 4 mm WL 303 mm	Yellow		4.0 111111	303 mm	364 mm	8650.515**

<sup>\*</sup> Only available in 25°.

The PANOVIEW telescopes are marked "blue" to distinguish them and they can also be used with your existing PDD system, of course.

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

<sup>\*\*</sup> We have adapted our PANOVIEW telescopes to our new, high-performance blue PDD system.

#### **OPTICAL URETHROTOME 8667**



FOR TELESCOPE 4 MM, 0°



for optically controlled slitting of urethral strictures.	Product no.
Sheath for urethrotome 20.5 FR SL 195 mm, with instrument port for lateral catheter insertion (4 Fr)	8667.011
Obturator for urethrotome 20.5 FR WL 231 mm, oval, cannulated, distal end rounded	8667.111
Outer sheath for urethrotome 20.5 FR SL 187 mm, oval, laterally open, for placing a 16 Fr balloon catheter	8667.161
Adapter for cystoscope with 1 instrument port, max. capacity 10 Fr, TL 79 mm	8652.264
Working element, urethrotome, passive 0/12° Receptacle for stricture scalpels	8667.911
Also:	

Telescope	Direction of view	Ø	WL	TL	Product no.
Telescope 0° Ø 4 mm WL 298 mm	0°	4 mm	298 mm	365 mm	8650.414 HE

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Stricture scalpels		see URO21



#### STRICTURE SCALPELS

#### FOR OPTICAL URETHROTOME 8667

Stricture scalpels with ceramic cutter		Cutting edge	Product no.
Solid sheath	Scalpel 20.5 FR ceramic, semi-circular	Semi-circular	8667.961
Sheath with central bore hole (for 4 Fr ureteral catheter)	Scalpel 20.5 FR ceramic, semi-circular	Semi-circular	8667.966
Sheath with central bore hole (for 4 Fr ureteral catheter)	Scalpel 20.5 FR ceramic, shark fin	Shark fin for narrow stenoses	8667.971
Solid sheath	Scalpel 20.5 FR ceramic, lancet-shaped	Lancet-shaped	8667.981
Stricture scalpels (steel)		Cutting edge	Product no.
Sheath with central bore hole (for 4 Fr ureteral catheter)	Scalpel 20.5 FR, semi-circular	Cutting edge Semi-circular	Product no. 8667.965
Sheath with central bore hole	Scalpel 20.5 FR, semi-circular  Scalpel 20.5 FR, semi-circular		
Sheath with central bore hole (for 4 Fr ureteral catheter)		Semi-circular	8667.965

Recommended accessories		Product no.
Protective sterilization sleeve Receptacle for max. 5 electrodes, reusable	AUTOGLAVE 134° C / 273° F	33030



#### OPTICAL MINI URETHROTOME



FOR TELESCOPE 3.3 MM, 0°



for optically controlled slitting of urethral strictures.	Product no.
Sheath for urethrotome 16.5 FR with supply and drain stopcock, lateral instrument port (4 Fr), distal end slanted, and automatic lock	8670.011
Obturator for urethrotome 16.5 FR Oval, cannulated, distal end rounded	8670.111
Outer sheath for urethrotome 16.5 FR Oval, laterally open, for placing a 16 Fr balloon catheter	8670.061
Outer sheath for urethrotome 16.5 FR Oval, laterally open, for placing a 12 Fr balloon catheter	8670.161
Working element, urethrotome, passive 0° Receptacle for stricture scalpels	8670.911
Also:	

Telescope	Direction of view	Ø	WL	TL	Product no.	
Telescope 0° Ø 3.3 mm WL 297 mm	0°	3.3 mm	297 mm	362 mm	8660.424 H	D D

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Stricture scalpels		see URO23



#### STRICTURE SCALPELS


#### FOR OPTICAL MINI URETHROTOME 8670

Stricture scalpels with ceramic cutter		Cutting edge	Product no.
Solid sheath	Scalpel 16.5 FR ceramic, semi-circular	Semi-circular	8670.961
Sheath with central bore hole (for 4 Fr ureteral catheter)	Scalpel 16.5 FR ceramic, semi-circular	Semi-circular	8670.966
Sheath with central bore hole (for 4 Fr ureteral catheter)	Scalpel 16.5 FR ceramic, lancet-shaped	Lancet-shaped	8670.981

Recommended accessories		Product no.
Protective sterilization sleeve Receptacle for max. 5 electrodes, reusable	AUTOGLAVE 134° C / 273° F	33030



# URETHROTOME FOR BLIND SLITTING

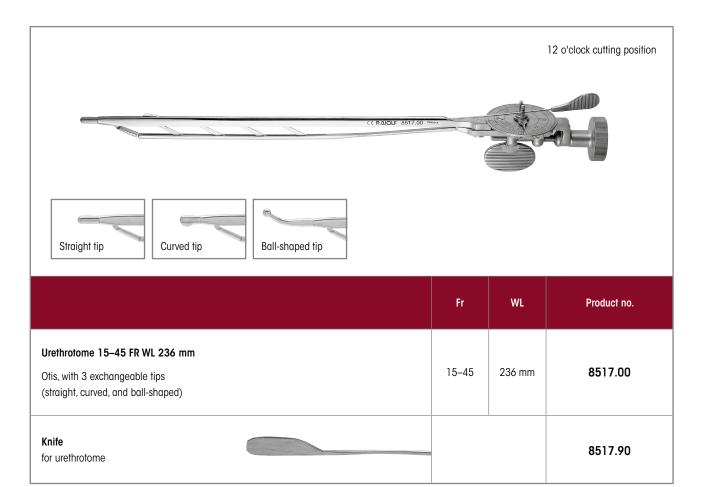



#### CYSTO-URETHROSCOPE 8650



SHEATH SYSTEMS FOR TELESCOPE 4 MM, 0°, 12°, 30°, 70°, AND ADAPTERS



				134	FC/2/3°F
Sheath for cystoscope bndl	Fr	Color coding	SL	Capacity in Fr	Product no.
Sheath for cystoscope 16 FR comprising: Sheath for cystoscope 16 FR (8650.0145), obturator for cystoscope 16 FR (8650.0147), and tube with LUER-LOCK connector (886.00)	16 Fr	Yellow		1 x 5*	8650.0141
Sheath for cystoscope 17.5 FR comprising: Sheath for cystoscope 17.5 FR (8650.0245), obturator for cystoscope 17.5 FR (8650.0247), and tube with LUER-LOCK connector (886.00)	17.5 Fr	Green		1 x 5 or 2 x 4	8650.0241
Sheath for cystoscope 19.5 FR comprising: Sheath for cystoscope 19.5 FR (8650.0345), obturator for cystoscope 19.5 FR (8650.0347), and tube with LUER-LOCK connector (886.00)	19.5 Fr	Red	231 mm	1 x 7 or 2 x 5	8650.0341
Sheath for cystoscope 21 FR comprising: Sheath for cystoscope 21 FR (8650.0445), obturator for cystoscope 21 FR (8650.0447), and tube with LUER-LOCK connector (886.00)	21 Fr	Blue	231 111111	1 x 10 or 2 x 6	8650.0441
Sheath for cystoscope 23 FR comprising: Sheath for cystoscope 16 FR (8650.0545), obturator for cystoscope 16 FR (8650.0547), and tube with LUER-LOCK connector (886.00)	23 Fr	White		1 x 12 or 2 x 7	8650.0541
Sheath for cystoscope 25 FR comprising: Sheath for cystoscope 25 FR (8650.0645), obturator for cystoscope 25 FR (8650.0647), and tube with LUER-LOCK connector (886.00)	25 Fr	Black		1 x 5	8650.0641

Urethroscopic only (cystoscopic only suitable for diagnostics via adapter 8650.254)





PANOVIEW	Direction of view	ø	WL	TL	Product no.
Telescope 0° Ø 4 mm WL 298 mm	0°		298 mm	365 mm	8650.414
Telescope 12° Ø 4 mm WL 297 mm	12°	4 mm	297 mm	363 mm	8654.431
Telescope 30° Ø 4 mm WL 300 mm	30°	4 mm	300 mm	364 mm	8654.422
Telescope 70° Ø 4 mm WL 302 mm	70°		302 mm	364 mm	8650.415
Telescope blue 0° Ø 4 mm WL 298 mm	0°		298 mm	365 mm	8650.514
Telescope blue 12° Ø 4 mm WL 298 mm	12°	4	298 mm	363 mm	8654.531
Telescope blue 30° Ø 4 mm WL 299 mm	30°	4 mm	299 mm	364 mm	8654.522
Telescope blue 70° Ø 4 mm WL 303 mm	70°		303 mm	362 mm	8650.515
for individual adapters/sheaths and obturators, see URO26 / for accessories, see URO29–URO30					



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### CYSTO-URETHROSCOPE 8650



SHEATH SYSTEMS FOR TELESCOPE 4 MM, 0°, 12°, 30°, 70°, AND ADAPTERS

Individual sheaths and obturators				Ado	apters for cystosco	рре	
- Indiana in the second in the							
					Only for diagnostics	1 instrument port	2 instrument ports
Individual sheath and obturator	Fr	SL/WL	Color coding	Product no.	Adapter for cystoscope TL 60 mm	Adapter for cystoscope TL 60 mm	Adapter for cystoscope TL 60 mm
Sheath for cystoscope 16 FR		SL 231 mm		8650.0145			
Obturator for cystoscope 16 FR	16 Fr	WL 249 mm	Yellow	8650.0147			
Sheath for cystoscope 17.5 FR	17.5 Fr	SL 231 mm	0	8650.0245			
Obturator for cystoscope 17.5 FR		WL 249 mm	Green	8650.0247			
Sheath for cystoscope 19.5 FR	10.5.5	SL 231 mm					
Obturator for cystoscope 19.5 FR	19.5 Fr	WL 251 mm	Red	8650.0347	0,50.054	0/50.0/4	0./50.004
Sheath for cystoscope 21 FR	03.5	SL 231 mm	D.	8650.0445	8650.254	8650.264	8650.284
Obturator for cystoscope 21 FR	21 Fr	WL 249 mm	Blue	8650.0447			
Sheath for cystoscope 23 FR		SL 231 mm	\A/I= !4 -	8650.0545			
Obturator for cystoscope 23 FR	23 Fr	WL 249 mm	White	8650.0547			
Sheath for cystoscope 25 FR	05.5	SL 231 mm	District	8650.0645			
Obturator for cystoscope 25 FR	25 Fr	WL 249 mm	Black	8650.0647			

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



#### CYSTO-URETHROSCOPE 8650




SHEATH SYSTEMS FOR TELESCOPE 4 MM, 30°, 70°, AND INSERTS WITH ALBARRÁN LEVER



AUTOGLAVE 134° C / 273° F

Sheath for cystoscope bndl	Fr	Color coding	SL	Capacity in Fr	Product no.
Sheath for cystoscope 17.5 FR comprising: Sheath for cystoscope 17.5 FR (8650.0245), obturator for cystoscope 17.5 FR (8650.0247), and tube with LUER-LOCK connector (886.00)	17.5 Fr	Green		1 x 5 or 2 x 4	8650.0241
Sheath for cystoscope 19.5 FR comprising: Sheath for cystoscope 19.5 FR (8650.0345), obturator for cystoscope 19.5 FR (8650.0347), and tube with LUER-LOCK connector (886.00)	19.5 Fr	Red	231 mm	1 x 7 or 2 x 5	8650.0341
Sheath for cystoscope 21 FR comprising: Sheath for cystoscope 21 FR (8650.0445), obturator for cystoscope 21 FR (8650.0447), and tube with LUER-LOCK connector (886.00)	21 Fr	Blue	231 111111	1 x 10 or 2 x 6	8650.0441
Sheath for cystoscope 23 FR comprising: Sheath for cystoscope 16 FR (8650.0545), obturator for cystoscope 16 FR (8650.0547), and tube with LUER-LOCK connector (886.00)	23 Fr	White		1 x 12 or 2 x 7	8650.0541



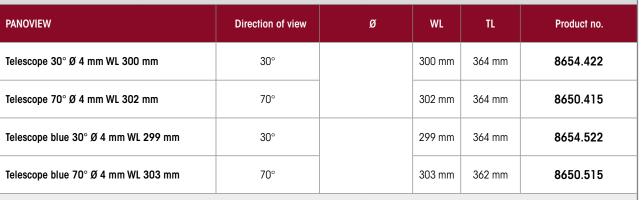

for individual adapters/sheaths and obturators, see URO28

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

HD



#### CYSTO-URETHROSCOPE 8650



SHEATH SYSTEMS FOR TELESCOPE 4 MM, 30°, 70°, AND INSERTS WITH ALBARRÁN LEVER

Individual sheaths and obturators							
Paint							
					1 instrument port	2 instrument ports	
Individual sheath and obturator	Fr	SL/WL	Color coding	Product no.	Working insert for cystoscope 30/70	Working insert for cystoscope 0/30/70	
Sheath for cystoscope 17.5 FR	- 17.5 Fr	SL 231 mm	Green	8650.0245			
Obturator for cystoscope 17.5 FR	17.511	17.011	WL 249 mm	Oleen	8650.0247		
Sheath for cystoscope 19.5 FR	- 19.5 Fr	SL 231 mm	D .	8650.0345			
Obturator for cystoscope 19.5 FR	19.5 FI	WL 251 mm	Red	8650.0347	8650.214	8650.204	
Sheath for cystoscope 21 FR	- 21 Fr	SL 231 mm WL 249 mm	Blue	8650.0445	6050.214	8050.204	
Obturator for cystoscope 21 FR	21 Ff		Blue	8650.0447			
Sheath for cystoscope 23 FR	02.5	SL 231 mm	\\/\bito	8650.0545			
Obturator for cystoscope 23 FR	23 Fr	WL 249 mm	White	8650.0547			


# your contact partner or directly with Richard Wolf GmbH.




spirit of excellence

#### OPTICAL FORCEPS AND SCISSORS

FOR CYSTO-URETHROSCOPE 8650 WITH TELESCOPE 4 MM, 0°

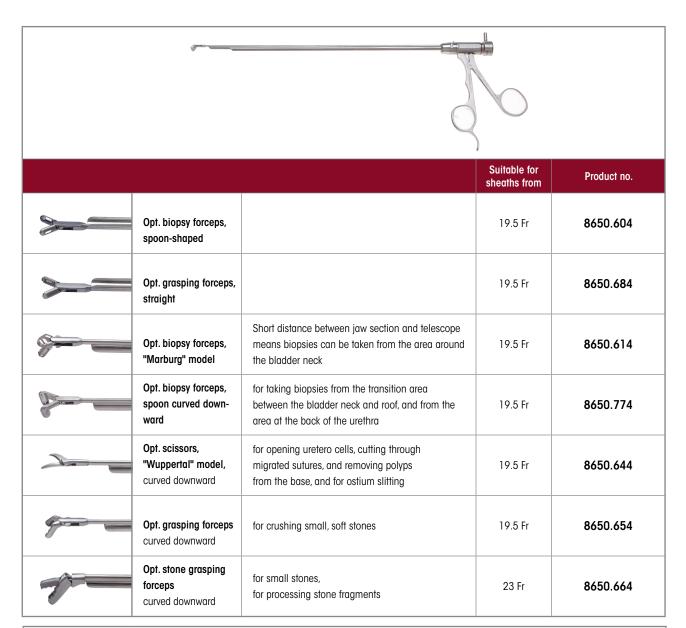

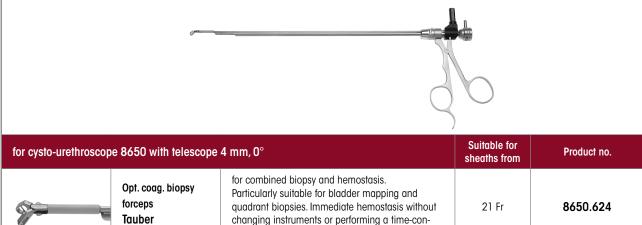


suming reorientation.



#### **VIEWING OBTURATORS**

#### FOR INSERTING THE SHEATH WHILE VIEWING FOR 4 MM TELESCOPES FROM 0° TO 30°

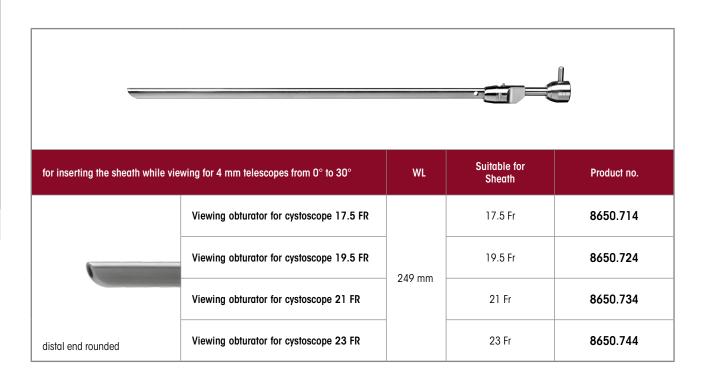

Product no.
see URO103/104
,


# your contact partner or directly with Richard Wolf GmbH.



spirit of excellence

#### **MIDI-SIZE**

#### CYSTO-URETHROSCOPE

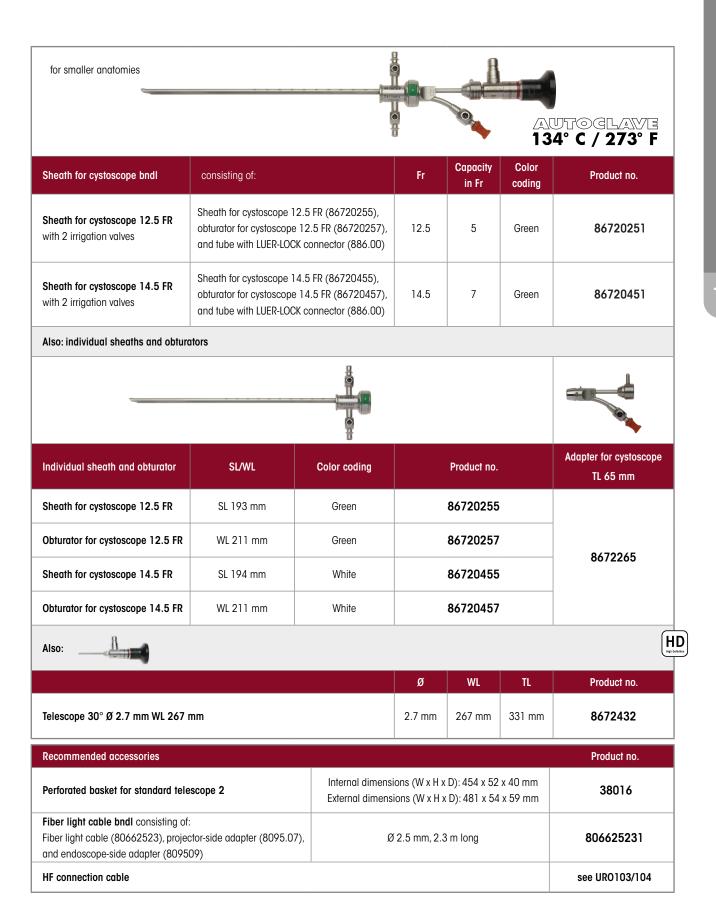

# 

spirit of excellence

#### **MIDI-SIZE**


#### FLEXIBLE AUXILIARY INSTRUMENTS

		WL	ΤL	Fr	Product no.
	Flex. biopsy forceps 5 FR WL 315 mm	315 mm	465 mm	5	829.05
	Flex. biopsy forceps 7 FR WL 375 mm	375 mm	490 mm	7	829.07
	Flex. grasping forceps 5 FR WL 315 mm	315 mm	465 mm	5	828.05
	Flex. grasping forceps 7 FR WL 365 mm	365 mm	515 mm	7	828.07
	Flex. scissors 7 FR WL 375 mm	375 mm	490	7	830.07



#### ATRAUMATIC COMPACT CYSTO-URETHROSCOPE

14/17 FR, 25° AND ADAPTERS

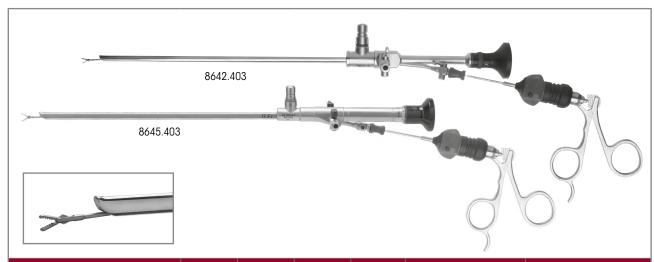

	Direction			Working channel				
	of view	WL	TL Sheath		for auxiliary instruments	Shape	Product no.	
Cystoscope 25° 14 FR WL 218 mm with straight eyepiece, atraumatically shaped tip	25°	218 mm	358 mm	14 Fr	Up to 5 Fr	Oval	8642.403	
Cystoscope 25° 17 FR WL 224 mm with straight eyepiece, atraumatically shaped tip	25°	224 mm	364 mm	17 Fr	Up to 7 Fr	Oval	8645.403	
Also:								

Also.						
		WL	TL	Fr	Product no.	
	Flex. biopsy forceps 7 FR WL 375 mm	375 mm	490 mm	7	829.07	
	Flex. biopsy forceps 5 FR WL 315 mm	315 mm	465 mm	5	829.05	
	Flex. grasping forceps 7 FR WL 365 mm	365 mm	515 mm	7	828.07	
	Flex. grasping forceps 5 FR WL 315 mm	315 mm	465 mm	5	828.05	
	Flex. scissors 7 FR WL 375 mm	375 mm	490 mm	7	830.07	
	Coag. electrode mono 6 FR WL 400 mm	400 mm	-	6	823.06	
Electrode shape: button	Coag. electrode mono 5 FR WL 400 mm	400 mm	-	5	823.05	

Recommended accessories		Product no.
Perforated basket for cysto-urethroscope	Internal dimensions (W x H x D): 435 x 54 x 73 mm External dimensions (W x H x D): 451 x 64 x 80 mm	38013
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



#### FORCEPS AND SCISSORS

SMALL MODULAR SYSTEM **HySafe** 


FOR ATRAUMATIC COMPACT CYSTO-URETHROSCOPES 14/17 FR, 25°

Grasping forceps jaw insert with sheath				Handle with overload protection	Complete instrument  • Jaw section  • Handle
	1				• Handle
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Distal angled with pike-mouth jaws	8642.6508	5	340 mm	•	8642.6502
	8645.6508	7	325 mm	•	8645.6502
Grasping forceps bndl - Spoon	8642.6008	5	340 mm	•	8642.6002
	8645.6008	7	340 mm	•	8645.6002
Biopsy forceps bndl	8642.6318	5	340 mm	•	8642.6312
Scissors bndl	8642.6818	5	340 mm	•	8642.6812
Grasping forceps bndl	8968.6808	6	425 mm	•	8968.6802



#### FLEXIBLE FIBER CYSTOSCOPES 5 MM/15 FR

CHANNEL 2.5 MM/7.5 FR

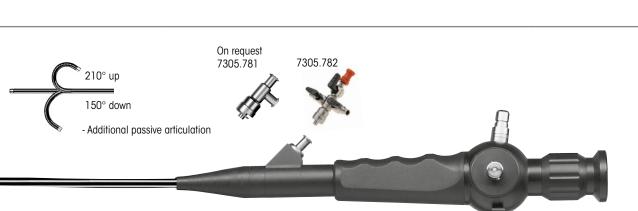



	Outer Ø	Working channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Fiber cystoscope 15 FR WL 400 mm				•		7305.001
Slanted distal tip Articulation +210°/-150° Direction of view 0°, angle of view 110°	15 Fr	7.5 Fr	400 mm		•	7305.006
Fiber cystoscope bndl consisting of: Fiber cystoscope 15 FR WL 400 mm (7305.001) Adapter with 2 irrigation valves and 1 instrument port (7305.782)Leakage tester for flex. endoscopes (163.903) Pressure equalization valve (163.904) Cleaning brush Ø 3 mm,TL 1,200 mm (PU = 10 PCS) (7990002)				•		730500111
Fiber cystoscope bndl  consisting of: Fiber cystoscope 15 FR WL 400 mm (7305.006) Adapter with 2 irrigation valves and 1 instrument port (7305.782) Leakage tester for flex. endoscopes (163.903) Pressure equalization valve (163.904) Cleaning brush Ø 3 mm,TL 1,200 mm (PU = 10 PCS) (7990002)				•	730500611	

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523) projector-side adapter (8095.07), and endoscope	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261



IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### FLEXIBLE FIBER CYSTOSCOPES 5 MM/15 FR

#### TECHNICAL DATA/AUXILIARY INSTRUMENTS

Fiber cystoscope 15 FR WL 400 mm	7305.001/7305.006
Distal tip	Slanted distal tip
Sheath diameter	15 Fr
Number of working channels	1
Working/irrigation channel diameter	7.5 Fr
Articulation	210° upward, 150° downward
Working length	400 mm
Angle of view	110°
Direction of view	0°

Auxiliary instruments		Outer Ø	WL	ΤL	Product no.
	Flex. biopsy forceps 5 FR WL 550 mm 1.6 mm 5 Fr			700 mm	829.051
	Flex. grasping forceps 5 FR WL 550 mm	1.6 mm 5 Fr	550 mm	680 mm	8735.685
	Flex. grasping forceps 6.6 FR WL 550 mm	2.0 mm 6.6 Fr	550 mm	690 mm	8736.685
	Adapter with 2 Luer connections, male, quick-release mech	7305.781			
	Adapter with 2 irrigation valves and 1 instrument port, quic	7305.782			
	Also: Luer sealing cap	15023205			
40	RIWO rubber cap, capacity 0.8 mm	88.01			
	Universal sealing valve 1–6 FR for inserting auxiliary instruments of 1–6 Fr	4712348			



### vision EF FLEXIBLE 1-CHANNEL SENSOR CYSTOSCOPES

pressure equalization valve (163.904), Luer sealing cap (15023205), and cleaning brush Ø 5 mm, TL 1,200 mm (PU = 10 PCS) (7990005)

pressure equalization valve (163.904), Luer sealing cap (15023205), and cleaning brush Ø 5 mm, TL 1,200 mm (PU = 10 PCS) (7990005)

Sensor cystoscope 16.2 FR, WL 400 mm (73151006),

leakage tester for flex. endoscopes (163.903),

Fiber cystoscope bndl consisting of:

#### spirit of excellence

"VISION EF" FLEXIBLE SENSOR CYSTOSCOPES



Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
Flexible auxiliary instruments		see URO39

731510062



### vision EF FLEXIBLE SENSOR CYSTOSCOPES

### TECHNICAL DATA

Sensor cystoscope 16.2 FR WL 400 mm	73151001/73151006
Distal tip	Cylindrical, atraumatic, slanted plastic tip 11.5 Fr
Sheath diameter	16.2 Fr
Number of working channels	1
Working/irrigation channel diameter	7.5 Fr
Articulation	210° upward, 210° downward
Working length	400 mm
Angle of view	110°
Illumination	Two distally integrated LEDs
Handle	Ergonomic handle design with axial cable outlet
Positioning of the working and irrigation channel in relation to the picture	At 3 o'clock
Endopicture	Octagonal, detail enhancement, automatic white balance, and brightness control, no focusing necessary
Cable length	2.5 m



### vision EF FLEXIBLE SENSOR CYSTOSCOPES

### **AUXILIARY INSTRUMENTS**

		Outer Ø	WL	TL	Product no.
	Flex. biopsy forceps 5 FR WL 550 mm	1.6 mm 5 Fr	550 mm	700 mm	829.051
	Flex. grasping forceps 5 FR WL 550 mm	1.6 mm 5 Fr	550 mm	680 mm	8735.685
	Adapter with 2 irrigation valves and 1 instrument port, quick-release mechanism  57 mm				
	Also: Luer sealing cap	15023205			
•	RIWO rubber cap, capacity 0.8 mm				
	Universal sealing valve 1–6 FR for inserting auxiliary instruments of 1–6 Fr				
	Adapter for machine leakage tests				163.905

"VISION EF" FLEXIBLE SENSOR CYSTOSCOPES



## FLEXIBLE SENSOR CYSTOSCOPES

### FOR ENDOCAM Logic 4K CONTROLLER



	Outer Ø	channel	WL	direction – articulation downward	direction – articulation upward	Product no.
Sensor cystoscope 16.2 Fr WL 400 mm Slanted distal tip	16.2 Fr	7.5 Fr	400 mm	•		7315001
Articulation +210°/-210° Direction of view 0°, angle of view 110°	10.2 FI	7.5 FI	400 111111		•	7315006
Sensor cystoscope bndl consisting of: Sensor cystoscope 16.2 FR, WL 400 n leakage tester for flex. endoscopes (16 pressure equalization valve (163.904 cleaning brush Ø 5 mm, TL 1,200 mm	63.903), ), Luer sealing	, g cap (15023;	,	•		73150012
Sensor cystoscope bndl consisting of: Sensor cystoscope 16.2 FR, WL 400 n leakage tester for flex. endoscopes (16 pressure equalization valve (163.904 cleaning brush Ø 5 mm, TL 1,200 mm	63.903), ), Luer sealing	, g cap (15023;	,		•	73150062

Recommended accessories		Product no.
<b>Fiber light cable bndl</b> consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
Flexible auxiliary instruments		see URO42

"MAMBA" FLEXIBLE SENSOR CYSTOSCOPES

## FLEXIBLE SENSOR CYSTOSCOPE

### TECHNICAL DATA

Sensor cystoscope 16.2 Fr WL 400 mm	7315001/7315006
Distal tip	11.5 Fr, atraumatic tip made of plastic, two distally integrated LEDs
Sheath diameter	16.2 Fr
Number of working channels	1
Working/irrigation channel diameter	7.5 Fr
Articulation	210° upward, 210° downward
Working length	400 mm
Angle of view	110°
Handle	Ergonomic handle design with axial cable outlet
Positioning of the working and irrigation channel in relation to the picture	At 3 o'clock
Endopicture	Octagonal, 3 levels of detail magnification, and 6x digital zoom; automatic white balance, light control, and focus
Compatible camera control unit	ENDOCAM Logic 4K ENDOCAM Logic HD

Required video equipment		Product no.
50 (a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	ENDOCAM Logic 4K camera control unit bndl consisting of: ENDOCAM Logic 4K camera control unit (5525301) Handheld remote control (5525401) 1x USB flash memory 32 GB (72321829) 1x HDMI/HDMI cable, lockable, 3.0 m (103847) 1x power cable (2440.03)	55253011



## FLEXIBLE SENSOR CYSTOSCOPE

### ACCESSORIES AND AUXILIARY INSTRUMENTS

		Outer Ø	WL	ΤL	Product no.
	Flex. biopsy forceps 5 FR WL 550 mm 1.6 mm 5 Fr 550 mm		700 mm	829.051	
	Flex. grasping forceps 5 FR WL 550 mm         1.6 mm         550 mm         700 m				828.051
Adapter with 2 irrigation valves and 1 instrument port, quick-release mechanism  57 mm					7305.782
Also: Luer sealing cap					15023205
RIWO rubber cap, capacity 0.8 mm					88.01
for inserting auxiliary instruments of 1–6 Fr  Universal sealing valve 1–6 FR					4712348
Adapter for machine leakage tests				163.905	

## System blue System Components

FOR PHOTODYNAMIC DIAGNOSTICS (PDD)







	Product no.
ENDOLIGHT LED blue bndl consisting of: ENDOLIGHT LED blue (5165001), patch cable, RJ45 SFTP, 0.5 m (72325378), toggle footswitch (2030.105), and power cable 3 m long (2440.03)	51650011
ENDOCAM Logic 4K camera control unit bndl consisting of: ENDOCAM Logic 4K camera control unit (5525301), handheld remote control (5525401), USB flash memory 32 GB (72321829), HDMI/HDMI cable, lockable, 3.0 m (103847), and power cable (2440.03)	55253011
ENDOCAM Logic HD Pendual camera head blue Cable length 3 m	5525833
Also:	
PANOVIEW & WI TI	Product no

PANOVIEW	Ø	WL	TL	Product no.
Telescope blue 0° Ø 4 mm WL 298 mm		298 mm	365 mm	8650.514
Telescope blue 12° Ø 4 mm WL 298 mm	4.0 mm	298 mm	363 mm	8654.531
Telescope blue 30° Ø 4 mm WL 299 mm	4.0 mm	299 mm	364 mm	8654.522
Telescope blue 70° Ø 4 mm WL 303 mm		303 mm	362 mm	8650.515
Special fiber light cable 3.5 mm, 2.3 m set consisting of: Fiber light cable blue Ø 3.5 mm (80673523), endoscope-side adapter (809509)	3.5 mm		2.3 m	806735231




### System blue

### SYSTEM COMPONENTS FOR PHOTODYNAMIC DIAGNOSTICS (PDD)

CYSTOSCOPY

Cystoscopy	Product no.		
Recommendation: PDD cysto-urethroscope with adapter			
	PANOVIEW telescope blue 70° Ø 4 mm WL 303 mm	8650.515	
	Adapter for cystoscope	8650.284	
	Sheath for cystoscope 19.5 FR	8650.0341	
	Obturator for cystoscope 19.5 FR	8650.0347	

### FOR RESECTOSCOPES TELESCOPE 4 MM, 0°, 12°, 30°

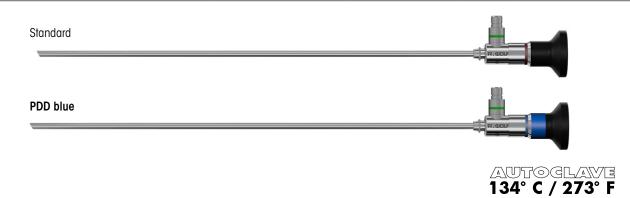

	Direction of view	Color coding	Ø	WL	TL	Product no.	
Telescope 0° Ø 4 mm WL 298 mm	. O°			4.0 mm	298 mm	365 mm	8650.414
Telescope blue 0° Ø 4 mm WL 298 mm	U	Blue	4.0 111111	298 mm	365 mm	8650.514**	
Telescope 12° Ø 4 mm WL 297 mm	- 12°	Orange	4.0 mm	297 mm	363 mm	8654.431	
Telescope blue 12° Ø 4 mm WL 298 mm	12	Ordinge	Ordinge 4.0 min	298 mm	363 mm	8654.531**	
Telescope 30° Ø 4 mm WL 300 mm	30°	Red		4.0 mm	300 mm	364 mm	8654.422
Telescope blue 30° Ø 4 mm WL 299 mm			4.0 111111	299 mm	364 mm	8654.522**	
Telescope 30° Ø 3.3 mm WL 299 mm			3.3 mm	299 mm	360 mm	8656.422	
Telescope 25° Ø 4 mm WL 342 mm	25°		4.0 mm	342 mm	404 mm	8668.433*	
Telescope 70° Ø 4 mm WL 302 mm	- 70° Yellow	Yellow	4.0 mm	302 mm	364 mm	8650.415	
Telescope blue 70° Ø 4 mm WL 303 mm	70		4.0 111111	303 mm	364 mm	8650.515**	


<sup>\*</sup> Only available in 25°.

The PANOVIEW telescopes are marked "blue" to distinguish them and they can also be used with your existing PDD system, of course.

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

"SHARK" RESECTOSCOPES (MONOPOLAR/BIPOLAR)

 $<sup>\</sup>ensuremath{^{**}}$  We have adapted our PANOVIEW telescopes to our new, high-performance blue PDD system.

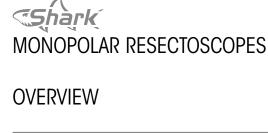

Sheath size

22/24 Fr

24 Fr

24/26 Fr

26 Fr

CI = continuous irrigation II = intermittent irrigation

CI

CI



### Sheaths for continuous irrigation



#### Sheaths for intermittent irrigation




\* Not suitable for 22/24 Fr Double sheath system

#### Monopolar working elements

	Active			Passive		
	Handle closed	Handle closed with comfort thumb rest	Hand	lle open	Handle closed	
rection of view			-{			
0°	8681205*	-	868	31224*	-	
12° 30°	8674205	8674234	867	74224	8674225	
	Spare rubber cap, red (P	PU = 5 pcs)			8874	
	Thumb ring with relativel	y large inner diameter			15008.159	

IX23 || Subject to modifications. Please note that some products may not be available in all countries. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.



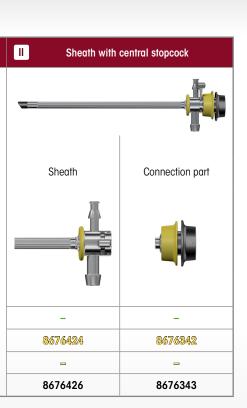

#### **Obturators**

Obturator	Viewing obturator	Dilatations obturator
	⊋	<b>≡</b> ===
8673022	8673122	-
8673024 8673026	8673124 8673126	8673224 8673226

### Telescopes, Ø 4 mm

Standard	PDD
8650.414	8650.514
8654.431	8654.531
8654.422	8654.522
Fiber light cable 2.5 mm 3.0 m set	806625301





### **OVERVIEW**

#### Sheaths for continuous irrigation



#### Sheaths for intermittent irrigation



#### **Bipolar working elements**

Active			Pa	ssive
Handle closed	Handle open		Handle open	Handle closed
8680.205	8680.204		8680.224	8680.225
Spare rubber cap, black (PU = 5 pcs)				
Thumb ring with relatively large inner diameter				

Direction of view

0°

12°

30°

Sheath size

22/24 Fr

24 Fr

24/26 Fr

26 Fr

CI


CI

CI = continuous irrigation

| | = intermittent irrigation

IX23 Subject to modifications. Please note that some products may not be available in all countries. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.



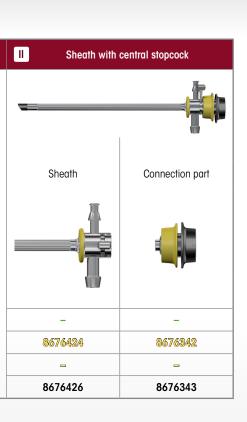

#### **Obturators**

Obturator	Viewing obturator	Dilatations obturator
	5	€ = =
8673022	8673122	-
8673024	8673124	8673224
8673026	8673126	8673226

### Telescopes, Ø 4 mm

Standard	PDD
8650.414	8650.514
8654.431	8654.531
8654.422	8654.522
Fiber light cable 2.5 mm 3.0 m set	806625301






X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH CONTINUOUS IRRIGATION DOUBLE SHEATH SYSTEM FOR RESECTION IN SALINE SOLUTION

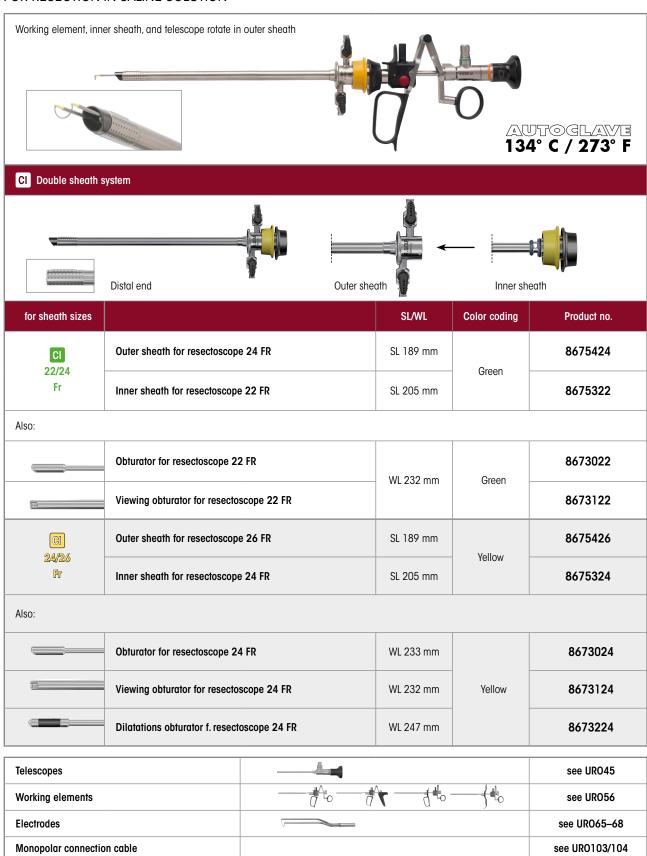

**Electrodes** 

Monopolar connection cable

### MONOPOLAR RESECTOSCOPE

spirit of excellence

FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH INTERMITTENT IRRIGATION AND ROTATABLE IRRIGATION ADAPTER FOR RESECTION IN SALINE SOLUTION



see URO65-68


see URO103/104

'SHARK" RESECTOSCOPES (MONOPOLAR/BIPOLAR)





FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH INTERMITTENT IRRIGATION WITH CENTRAL STOPCOCK FOR RESECTION IN SALINE SOLUTION

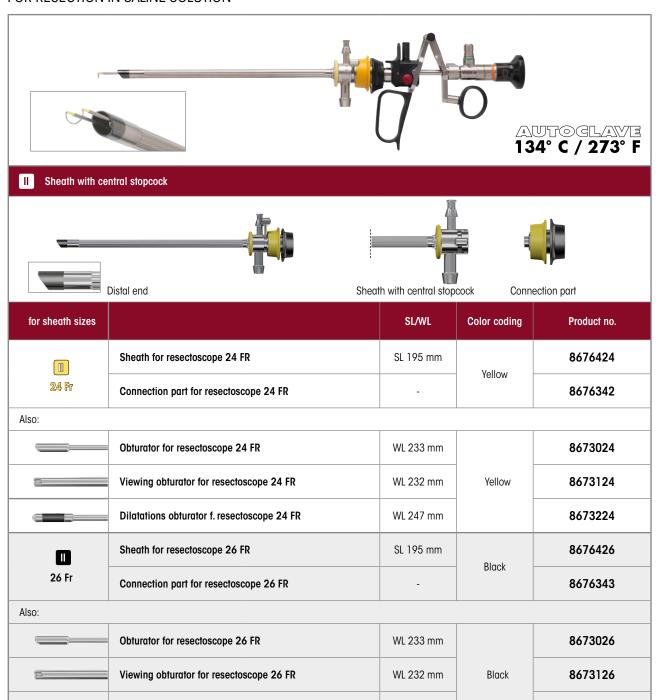

Telescopes		see URO45
Working elements		see URO56
Electrodes	V	see URO65-68
Monopolar connection cable		see URO103/104

WL 248 mm


Dilatations obturator f. resectoscope 26 FR

8673226



### FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH CONTINUOUS IRRIGATION DOUBLE SHEATH SYSTEM FOR RESECTION IN SALINE SOLUTION

**BIPOLAR RESECTOSCOPE** 

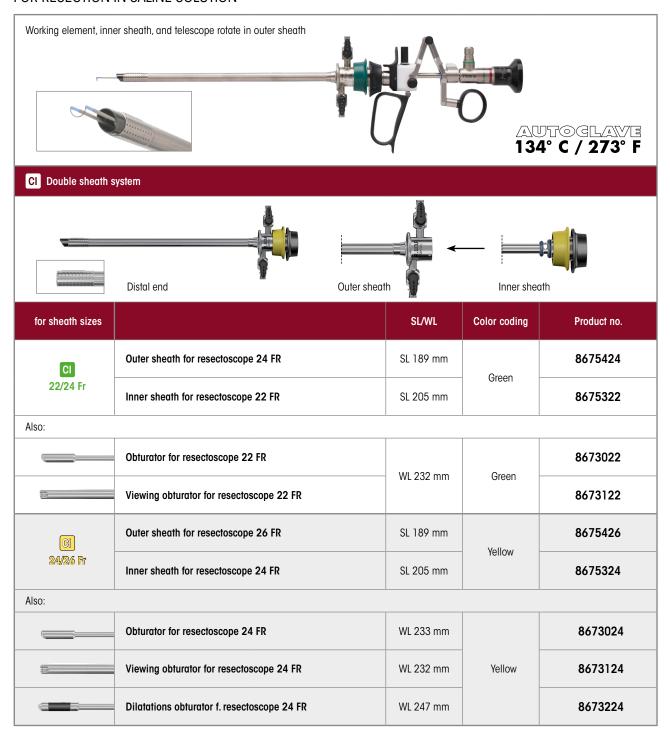

Telescopes	see URO45
Working elements	see URO57
Electrodes	see URO69-71
Bipolar connection cable	see URO105

"SHARK" RESECTOSCOPES (MONOPOLAR/BIPOLAR)





| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with


contact partner or directly with Richard Wolf GmbH

FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH INTERMITTENT IRRIGATION AND ROTATABLE IRRIGATION ADAPTER FOR RESECTION IN SALINE SOLUTION



### Shark BIPOLAR RESECTOSCOPE

FOR TELESCOPE 4 MM, 0°, 12°, 30° WITH INTERMITTENT IRRIGATION WITH CENTRAL STOPCOCK FOR RESECTION IN SALINE SOLUTION

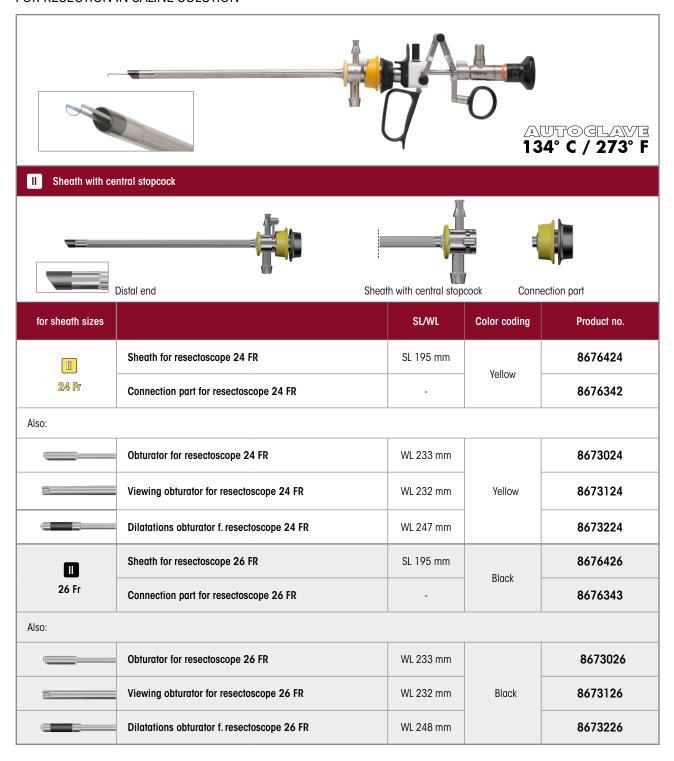

Telescopes		see URO45
Working elements		see URO57
Electrodes	<u></u>	see URO69-71
Bipolar connection cable		see URO105

"SHARK" RESECTOSCOPES (MONOPOLAR/BIPOLAR)





FOR RESECTOSCOPES, MONOPOLAR TELESCOPE 4 MM, 0°, 12°, 30°

Direction of view 0°	Handle variants	Cutting	Product no.
Active working element mono 0° Cut is made against spring pressure	Handle closed	Active	8681205*
Passive working element mono 0°  Cut is made with spring pressure	Handle open	Passive	8681224*

<sup>\*</sup> Not suitable for 22/24 Fr Double sheath system

Direction of view 12°/30°	Handle variants	Cutting	Product no.
Active working element mono 12/30° Cut is made against spring pressure	Handle closed	Autica	8674205
Active working element mono 12/30° Cut is made against spring pressure	Handle closed with comfort thumb rest	Active	8674234
Passive working element mono 12/30° Cut is made with spring pressure	Handle open	Dessive	8674224
Passive working element mono 12/30° Cut is made with spring pressure	Handle closed	- Passive	8674225

Recommended accessories		Product no.
Rubber cap, red (PU = 5 PCS)	for sealing off the electrode clamping mechanism on the working element	8874
Thumb ring	with relatively large inner diameter	15008.159



FOR RESECTOSCOPES, BIPOLAR TELESCOPE 4 MM, 0°, 12°, 30°

Direction of view 0°/12°/30°	Handle variants	Cutting	Product no.
Active working element bipo 0/12/30°  Cut is made against spring pressure	Handle open	Antivo	8680.204
Active working element bipo 0/12/30° Cut is made against spring pressure	Handle closed	Active	8680.205
Passive working element bipo 0/12/30°  Cut is made with spring pressure	Handle open	Passive	8680.224
Passive working element bipo 0/12/30° Cut is made with spring pressure	Handle closed	LUSSIVE	8680.225

Recommended accessories		Product no.
Rubber cap, black (PU = 5 PCS)	for sealing off the electrode clamping mechanism on the working element	8880
Thumb ring	with relatively large inner diameter	15008.159

"SHARK" RESECTOSCOPES (MONOPOLAR/BIPOLAR)




X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

our contact partner or directly with Richard Wolf GmbH.

### MONOPOLAR WORKING ELEMENTS

FOR RESECTOSCOPE, LONG SHEATH MONOPOLAR TELESCOPE 4 MM,  $25^{\circ}$ 

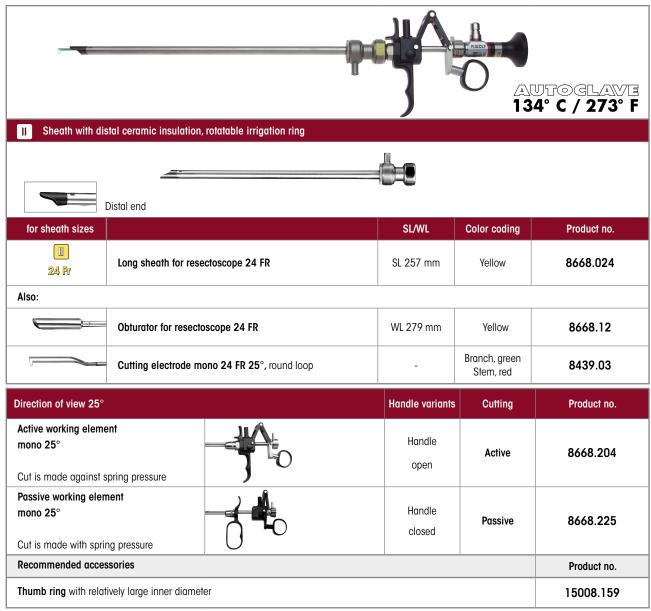


	Direction of view	Ø	WL	TL	Product no.
Telescope 25° Ø 4 mm WL 342 mm	0°	4.0 mm	342 mm	404 mm	8668.433 H
Recommended accessories					Product no.

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Monopolar connection cable		see URO103/104



### **MIDI** size

#### **RESECTOSCOPE**

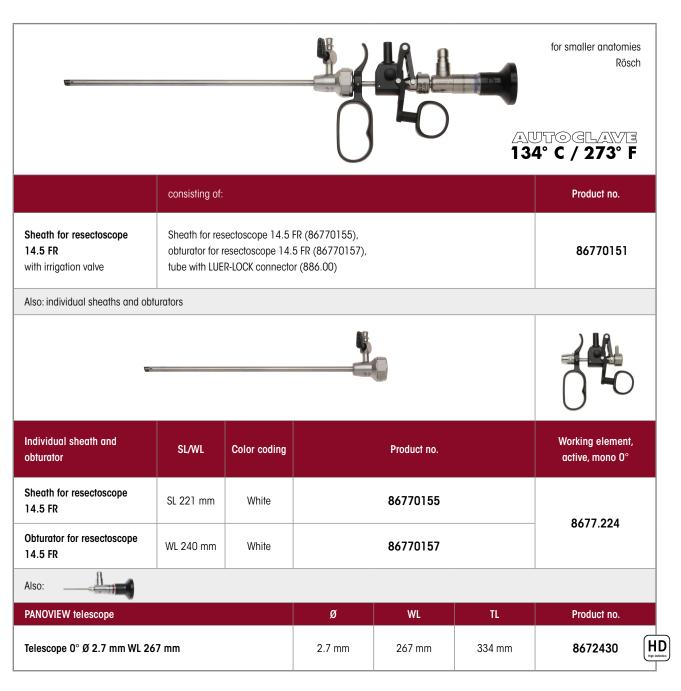

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Container (W x H x D) 300 x 60 x 200 mm		33020
Monopolar connection cable		see UR0103/104



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

### **MIDI** size

### **AUXILIARY INSTRUMENTS**

Stricture scalpels with ceramic cutter		Cutting surface	Product no.
	Scalpel 14.5 FR, lancet-shaped	Lancet-shaped, cuts on both sides	8677981
	Scalpel 14.5 FR, sickle-shaped	Sickle-shaped	8677931


Electrodes		Electrode shape	Product no.
8	Coag. electrode mono 14.5 FR 0°  Stem color yellow	Button	8416011
0	Cutting electrode mono 14.5 FR 0°  Stem color yellow	Round loop	8416031
	Hook electrode mono 14.5 FR 0° Stem color yellow	Hook	8416091



### System blue

### SYSTEM COMPONENTS

FOR PHOTODYNAMIC DIAGNOSTICS (PDD)



endoscope-side adapter (809509)





				Product no.
ENDOLIGHT LED blue bndl consisting of: ENDOLIGHT LED blue (5165001), patch cable, RJ45 SFTP, 0.5 m (723253 and power cable 3 m long (2440.03)	51650011			
ENDOCAM Logic 4K camera control unit bndl  consisting of: ENDOCAM Logic 4K camera control unit (5525301), handheld remote col  USB flash memory 32 GB (72321829), HDMI/HDMI cable, lockable, 3.0 m	55253011			
ENDOCAM Logic HD Pendual camera head blue Cable length 3 m				5525833
Also:				
PANOVIEW	ø	WL	TL	Product no.
Telescope blue 0° Ø 4 mm WL 298 mm		298 mm	365 mm	8650.514
Telescope blue 12° Ø 4 mm WL 298 mm	4.0 mm	298 mm	363 mm	8654.531
Telescope blue 30° Ø 4 mm WL 299 mm	8654.522			
Telescope blue 70° Ø 4 mm WL 303 mm	8650.515			
Special fiber light cable 3.5 mm, 2.3 m set consisting of: Fiber light cable blue Ø 3.5 mm (80673523),	3.5 mm		2.3 m	806735231

1.14

"SYSTEM BLUE" FOR PHOTODYNAMIC DIAGNOSTICS (PDD)



### System blue

### SYSTEM COMPONENTS FOR PHOTODYNAMIC DIAGNOSTICS (PDD)

TUR-B (MONOPOLAR RESECTION OF BLADDER TUMORS)

ransurethral resection of the bladder (TL	IR-B)	Product no.
ecommendation: TUR-B/monopolar SHARK 2/24 Fr, 30°, for monopolar resection of bladde	•	
<b>35</b> \(\)-14	Working element, active, mono 12/30° Active, closed	8674205
C.Snark Bl	Optional: working element, passive, mono 12/30° Passive, closed	8674225
	Outer sheath for resectoscope 24 FR	8675424
*10	Inner sheath for resectoscope 22 FR	8675322
	Obturator for resectoscope 22 FR	8673022
	Viewing obturator for resectoscope 22 FR	8673122
	Special fiber light cable 3.5 mm, 2.3 m SET	806735231
	Telescope blue 30° Ø 4 mm WL 299 mm	8654.522
	Optional: telescope blue 12° Ø 4 mm WL 298 mm	8654.531
	Cutting electrode mono 22 FR 12/30° In individual sterile packaging (PU = 10 PCS)	46782225
	Coag. electrode mono 22–24 FR 12/30° In individual sterile packaging (PU = 5 PCS)	46782201
commendation: TUR-B/monopolar SHARK '26 Fr, 30°, for monopolar resection of bladde		
	Working element, active, mono 12/30° Active, closed	8674205
Shark M	Optional: working element, passive, mono 12/30° Passive, closed	8674225
	Outer sheath for resectoscope 26 FR	8675426
	Inner sheath for resectoscope 24 FR	8675324
	Obturator for resectoscope 24 FR	8673024
~	Viewing obturator for resectoscope 24 FR	8673124
	Dilatations obturator f. resectoscope 24 FR	8673224
	Special fiber light cable 3.5 mm, 2.3 m SET	806735231
	Telescope blue 30° Ø 4 mm WL 299 mm	8654.522
	Optional: telescope blue 12° Ø 4 mm WL 298 mm	8654.531
	Cutting electrode mono 24 FR 12/30° In individual sterile packaging (PU = 10 PCS)	46782425



### System blue

### SYSTEM COMPONENTS FOR PHOTODYNAMIC DIAGNOSTICS (PDD)

TUR-B (BIPOLAR RESECTION OF BLADDER TUMORS)

•	,	
Transurethral resection of the bladder (TUR-B)		Product no.
Recommendation: TUR-B/bipolar SHARK continuous irr 22/24 Fr, 30°, for bipolar resection of bladder tumors	igation resectoscope	
ach-li	Working element, active, bipo 0/12/30° Active, closed	8680.205
Snairk	Optional: working element, passive, bipo 0/12/30° Passive, closed	8680.225
0.40	Outer sheath for resectoscope 24 FR	8675424
90	Inner sheath for resectoscope 22 FR	8675322
•	Obturator for resectoscope 22 FR	8673022
	Viewing obturator for resectoscope 22 FR	8673122
	Special fiber light cable 3.5 mm, 2.3 m SET	806735231
	Telescope blue 30° Ø 4 mm WL 299 mm	8654.522
	Optional: telescope blue 12° Ø 4 mm WL 298 mm	8654.531
	Cutting electrode bipo 22 FR 12/30° In individual sterile packaging (PU = 3 PCS)	4622.2533
	Cutting electrode bipo 22 FR 12/30° In individual sterile packaging (PU = 3 PCS)	4622.1333
	Coag. electrode bipo 22 FR 12/30° In individual sterile packaging (PU = 3 PCS)	4623.0243
Recommendation: TUR-B/bipolar SHARK continuous irr 24/26 Fr, 30°, for bipolar resection of bladder tumors	rigation resectoscope	
	Working element, active, bipo 0/12/30° Active closed	8680.205



Working element, active, bipo 0/12/30° Active, closed	8680.205
Optional: working element, passive, bipo 0/12/30° Passive, closed	8680.225
Outer sheath for resectoscope 26 FR	8675426
Inner sheath for resectoscope 24 FR	8675324
Obturator for resectoscope 24 FR	8673024
Viewing obturator for resectoscope 24 FR	8673124
Special fiber light cable 3.5 mm, 2.3 m SET	806735231
Telescope blue 30° Ø 4 mm WL 299 mm	8654.522
Optional: telescope blue 12° Ø 4 mm WL 298 mm	8654.531
Optional: telescope blue 12° Ø 4 mm WL 298 mm	8654.531
Cutting electrode bipo 24–26 FR 12/30° In individual sterile packaging (PU = 3 PCS)	4622.2513
Cutting electrode bipo 24 FR 12/30° In individual sterile packaging (PU = 3 PCS)  4622.13	
Cutting electrode bipo 24–26 FR 12/30° (oval, specifically for en bloc resection) In individual sterile packaging (PU = 3 PCS)	4622.1323
Cutting electrode bipo 24–26 FR 12/30° In individual sterile packaging (PU = 3 PCS)	4623.0223

"SYSTEM BLUE" FOR PHOTODYNAMIC DIAGNOSTICS (PDD)





FOR MULTIPLE USE 12°/30°

### 12°/30°, for multiple use, monopolar

	Desirontian	Dunalist		for sheath	sizes [in Fr]		Color coding		Model
	Designation	Bracket	CI 22/24	<b>II</b> 24	<b>CI</b> 24/26	II 26	Branch	Stem	Model
	Cutting electrode mono 22 FR 12/30°		•	-	_	-	Green	Dark gray	86782235
	Cutting electrode mono 24 FR 12/30°	Loop Ø 0.35 mm	_	•	•	-	Yellow	Dark gray	86782435
	Cutting electrode mono 26 FR 12/30°		_	-	-	•	Black	Dark gray	86782635
)	Cutting electrode mono 24 FR 12/30°	Loop Ø 0.8 mm	-	•	•	-	Yellow	Dark gray	86782480
	Coag. electrode mono 22–24 FR 12/30°	Dallar	•	•	•	-	Green	Dark gray	86782201
1	Coag. electrode mono 26 FR 12/30°	Roller	-	-	-	•	Black	Dark gray	86782601
	Coag. electrode mono 22–24 FR 12/30°	Ball	•	•	•	-	Green	Dark gray	86782202
	Coag. electrode mono 22–24 FR 12/30°		•	•	•	-	Green	Dark gray	86782203
#	Coag. electrode mono 26 FR 12/30°	Button	_	-	-	•	Black	Dark gray	86782603
	Knife electrode mono 22–24 FR 12/30°	Knife	•	•	•		Green	Dark gray	86782204
•	Knife electrode mono 26 FR 12/30°	Kille	_	-	_	•	Black	Dark gray	86782604
	Hook electrode mono 22–24 FR 12/30°	Hook	•	•	•	-	Green	Dark gray	86782205
9	Hook electrode mono 26 FR 12/30°	HOUK	_	_	_	•	Black	Dark gray	86782605

• Suitable for corresponding sheath size - Not suitable

CI = continuous irrigation

= intermittent irrigation

	Product no.
	33030
The second secon	





FOR MULTIPLE USE 12°/30°

### 12°/30°, for multiple use, monopolar

Designation	Bracket		for sheath s	sizes [in Fr]		Color	Model	
Designation	Diuckei	CI 22/24	<b>II</b> 24	CI 24/26	III 26	Branch	Stem	Model
EVAP-Elektrode mono 24–26 FR 12/30°	Barrel	-	•	•	•	Yellow	Dark gray	86782407
EVAP-Elektrode mono 24–26 FR 12/30°	Pyramid	-	•	•	•	Yellow	Dark gray	86782408
Wing electrode mono 22 FR 12/30°	Wing (bracket	•	-	_	-	Green	Dark gray	86782206
EVAP-Elektrode mono 24 FR 12/30°		_	•	•	-	Yellow	Dark gray	86782406
EVAP-Elektrode mono 26 FR 12/30°	p. 50, nary	_	_	_	•	Black	Dark gray	86782606

• Suitable for corresponding sheath size - Not suitable

CI = continuous irrigation

II = intermittent irrigation

Recommended accessories		Product no.
Protective sterilization sleeve Receptacle for max. 5 electrodes, reusable	AUT©GLAVE 134° C / 273° F	33030

"SHARK" ELECTRODES (MONOPOLAR/BIPOLAR) – "E-LINE" ELECTRODES







IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

FOR MULTIPLE USE 0°

### 0°, for multiple use, monopolar

	Designation	Domesticate		for sheath	sizes [in Fr]		Color	coding	Model
	Designation	Bracket	CI 22/24	<b>1</b> 24	GI 24/26	<b>II</b> 26	Branch	Stem	Model
	Cutting electrode mono 24 FR 0°	Loop	_	•	•	-	Yellow	Dark gray	86792435
6	Cutting electrode mono 26 FR 0°	Ø 0.35 mm	-	-	-	•	Black	Dark gray	86792635
5	Coag. electrode mono 24 FR 0°	Roller	-	•	•	-	Green	Dark gray	86792201
	Coag. electrode mono 24–26 FR 0°	Ball	-	•	•	•	Transparent	Dark gray	86792202
5	EVAP-Elektrode mono 24–26 FR 0°	Barrel	-	•	•	•	Yellow	Dark gray	86792407
	Knife electrode mono 24–26 FR 0°	Knife	-	•	•	•	Transparent	Dark gray	86792204
	Hook electrode mono 24–26 FR 0°	Hook	_	•	•	•	Transparent	Dark gray	86792205

Suitable for corresponding sheath size - Not suitable

CI = continuous irrigation

= intermittent irrigation

Recommended accessories		Product no.
Protective sterilization sleeve Receptacle for max. 5 electrodes, reusable	AUTOGLAVE 134° C / 273° F	33030



# MONOPOLAR ELECTRODES

FOR SINGLE USE 12°/30°

### 12°/30°, for single use, sterile\*, monopolar

	Designation			for sheath	sizes [in Fr]		Color	coding	No. de la
	(PU = 5 PCS)	Bracket	CI 22/24	<b>II</b> 24	CI 24/26	<b>II</b> 26	Branch	Stem	Model
	Cutting electrode mono 22 FR 12/30°		•	-	_	-	Green	Transparent	46782235
	Cutting electrode mono 24 FR 12/30°	Loop Ø 0.35 mm	-	•	•	-	Yellow	Transparent	46782435
	Cutting electrode mono 26 FR 12/30°		-	_	_	•	Black	Transparent	46782635
	Cutting electrode mono 22 FR 12/30°	Loop	•	_	-	-	Green	Transparent	46782225
(PU = 10 PCS)	Cutting electrode mono 24 FR 12/30°	Ø 0.25 mm	-	•	•	-	Yellow	Transparent	46782425
	Cutting electrode mono 24 FR 12/30°	Loop Ø 0.8 mm	-	•	•	-	Yellow	Transparent	46782480
	Hook electrode mono 24 FR 12/30°	IIIII-	•	•	•	-	Green	Transparent	46782205
	Hook electrode mono 26 FR 12/30°	Hook	-	_	-	•	Black	Transparent	46782605
	Coag. electrode mono 22–24 FR 12/30°	Roller	•	•	•	-	Green	Transparent	46782201
	Coag. electrode mono 22–24 FR 12/30°	Ball	•	•	•	-	Green	Transparent	46782202
	Coag. electrode mono 22–24 FR 12/30°	Duttan	•	•	•	-	Green	Transparent	46782203
*	Coag. electrode mono 26 FR 12/30°	Button	-	-	-	•	Black	Transparent	46782603
	Knife electrode mono 22–24 FR 12/30°	Knife	•	•	•	-	Green	Transparent	46782204
	Knife electrode mono 26 FR 12/30°	Milio	_	_	_	•	Black	Transparent	46782604

• Suitable for corresponding sheath size - Not suitable

CI = continuous irrigation

= intermittent irrigation

**URO67** 

"SHARK" ELECTRODES (MONOPOLAR/BIPOLAR) – "E-LINE" ELECTRODES

<sup>\*</sup> In individual sterile packaging





FOR SINGLE USE 0°

### 0°, for single use, sterile\*, monopolar

	Designation	Dunalist		for sheath	sizes [in Fr]		Color	coding	Model
	(PU = 5 PCS)	Bracket	CI 22/24	<b>II</b> 24	GI 24/26	II 26	Branch	Stem	Model
	Cutting electrode mono 24 FR 0°	Loop	-	•	•	-	Yellow	Transparent	46792435
U	Cutting electrode mono 26 FR 0°	Ø 0.35 mm	-	-	-	•	Black	Transparent	46792635
	Hook electrode mono 24 FR 0°	Hook	-	•	•	-	Transparent	Transparent	46792205
5	Coag. electrode mono 24 FR 0°	Roller	-	•	•	-	Green	Transparent	46792201
	Knife electrode mono 24 FR 0°	Knife	-	•	•	-	Transparent	Transparent	46792204

• Suitable for corresponding sheath size

- Not suitable

\* In individual sterile packaging

CI = continuous irrigation

II = intermittent irrigation



"SHARK" ELECTRODES (MONOPOLAR/BIPOLAR) – "E-LINE" ELECTRODES



spirit of excellence

FOR MULTIPLE USE 0°/12°/30°

### 12°/30°, for multiple use, bipolar

Decignation	Bracket		for sheath	sizes [in Fr]		Color	coding	Model
Designation	Diuckei	CI 22/24	1 24	Cl 24/26	II 26	Branch	Stem	
Cutting electrode bipo 22 FR 12/30°	Loop Ø 0.3 mm	•	-	_	-	Blue	Yellow	8622133
Cutting electrode bipo 24 FR 12/30°		_	•	•	•	Blue	Yellow	8622131
Coag. electrode bipo 22–26 FR 12/30°	Cylinder Ø 1.2 mm	•	•	•	•	Blue	Yellow	8623022
Hook electrode bipo 22–26 FR 12/30°	Hook	•	•	•	•	Blue	Yellow	862309

### 0°, for multiple use, bipolar

Designation	Bracket		for sheath sizes [in Fr]				Color coding		
Designation	Diuckei	CI 22/24	<b>1</b> 24	<b>CI</b> 24/26	<b>II</b> 26	Branch	Stem	Model	
Cutting electrode bipo 24 FR 0°	Loop Ø 0.3 mm	_	•	•	_	Blue	Yellow	8609031	

• Suitable for corresponding sheath size - Not suitable

CI = continuous irrigation

= intermittent irrigation

Recommended accessories		Product no.
Protective sterilization sleeve Receptacle for max. 5 electrodes, reusable	AUTOGLAVE 134° C / 273° F	33030







FOR SINGLE USE 12°/30°

### 12°/30°, for single use, sterile\*, bipolar

	Designation	Donalest		for sheath	sizes [in Fr]		Color	coding	Model
	(PU = 3 PCS)	Bracket	CI 22/24	<b>II</b> 24	<b>CI</b> 24/26	<b>II</b> 26	Branch	Stem	Model
	Cutting electrode bipo 22 FR 12/30°		•	-	-	-	Blue	Blue	4622.1333
	Cutting electrode bipo 24 FR 12/30°	Loop Ø 0.3 mm	_	•	•	-	Blue	Blue	4622.1313
	Cutting electrode bipo 26 FR 12/30°		_	-	•	•	Green	Blue	4624.1313
	Cutting electrode bipo 22 FR 12/30°	Loop	•	-	-	-	Blue	Blue	4622.2533
	Cutting electrode bipo 24–26 FR 12/30°	Ø 0.25 mm	_	•	•	•	Blue	Blue	4622.2513
	Cutting electrode bipo 24–26 FR 12/30° Oval, specifically for en bloc resection	Loop Ø 0.3 mm	-	•	•	•	Blue	Blue	4622.1323
	Coag. electrode bipo 22 FR 12/30°	Cylinder Ø 1.2 mm	•	-	-	-	Blue	Blue	4623.0243
	Coag. electrode bipo 24–26 FR 12/30°		_	•	•	•	Blue	Blue	4623.0223
	BiVAP-Elektrode bipo 22 FR 12/30°	Torus	•	-	-	-	Blue	Blue	46300223
	BiVAP-Elektrode bipo 24–26 FR 12/30°	iorus	_	•	•	•	Blue	Blue	46300243
	Enucleation electrode bipo 22 FR 12/30°	_	•	-	_	-	Blue	Blue	46400223
5	Enucleation electrode bipo 24 FR 12/30°	- Torus	_	•	•	•	Blue	Blue	46300243

• Suitable for corresponding sheath size

- Not suitable

\* In individual sterile packaging

CI = continuous irrigation

= intermittent irrigation





FOR SINGLE USE 0°

### $0^{\circ}$ , for single use, sterile\*, bipolar

	Designation (PU = 3 PCS)	Bracket	for sheath sizes [in Fr]				Color coding		Madel
			CI 22/24	<b>II</b> 24	<b>Cl</b> 24/26	<b>II</b> 26	Branch	Stem	Model
	Cutting electrode bipo 24 FR 0°	Loop Ø 0.3 mm	_	•	•	-	Blue	Blue	4609.0313
	Cutting electrode bipo 26 FR 0°		_	-	-	•	Green	Blue	4611.0313
	Cutting electrode bipo 24 FR 0°	Loop Ø 0.25 mm	_	•	•	-	Blue	Blue	4609.2513
	Cutting electrode bipo 24–26 FR 0°	Loop Ø 0.3 mm	-	•	•	•	Blue	Blue	4609.0323
	Coag. electrode bipo 24–26 FR 0°	Cylinder Ø 1.2 mm	-	•	•	•	Blue	Blue	4610.0223
	BiVAP-Elektrode bipo 24–26 FR 0°	Torus	-	•	•	•	Blue	Blue	46310243

Suitable for corresponding sheath size

Not suitable

\* In individual sterile packaging

CI = continuous irrigation

II = intermittent irrigation



## MONOPOLAR ELECTRODES

RICHARD spirit of excellence

FOR RESECTOSCOPES, TELESCOPE 4 MM, 25°, LONG SHEATH

### 25°, for multiple use, monopolar

	Designation	Bracket		Color	Model	
	Designation	Бійскеі	<b>11</b> 24	Branch	Stem	Model
	Cutting electrode mono 24 FR 25°	Loop Ø 0.3 mm	•	Green	Red	8439.03
è	Coag. electrode mono 24 FR 25°	Roller	•	Blue	Red	8440.02

Recommended accessories Product no. Protective sterilization sleeve 33030 Receptacle for max. 5 electrodes, reusable AUTOGLAVE 134° C / 273° F

IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

### **ACCESSORIES**

### FOR RESECTOSCOPE SHEATHS Shark



for sheat	h sizes [in Fr]		Working units of cysto-urethroscope 8650 for use in resectoscope sheaths		with felescope Ø 4 mm	
1 24/26 Fr	©l 26 Fr	Via	Version	Product no.	4	
•	•	Only for diagnostics	Adapter with instrument port	8652.264	0°, 12°, 30°, 70°	
•	•		Opt. scissors, "Wuppertal" model	8650.644	0°	
-	•		Opt. biopsy forceps, "Marburg" model	8650.614	0°	
-	•	Adapter for E-Line sheaths	Opt. grasping forceps, curved downward	8650.654	0°	
-	•	8652	Opt. biopsy forceps, spoon downward	8650.774	0°	
-	•	8652.704	Opt. grasping forceps, straight	8650.684	0°	
-	•		Opt. biopsy forceps, spoon-shaped	8650.604	0°	
-	•		Opt. coag. biopsy forceps, Tauber	8650.624	0°	
-	•	without adapter	Working insert for cystoscope 0/30/70* or working insert for cystoscope 30/70**	8650.204* or 8650.214**	(0°, 12°) 30°, 70°	

II = intermittent irrigation

"SHARK" ELECTRODES (MONOPOLAR/BIPOLAR) – "E-LINE" ELECTRODES

1.15

CI = continuous irrigation



### **ACCESSORIES**

## FOR RESECTOSCOPE SHEATHS Shark WITH 4 MM TELESCOPE

		for sh	eaths	
			with rotatable and replaceable irrigation ring	with fixed Luer stopcock
Ţ		Ø	Capacity 4 mm	Capacity 3 mm
	Two-way stopcock, maintenance-free	3 mm		88350
Par	with LUER-LOCK connection, reusable		88351	
RIMON	Stopcock LUER-LOCK connection Ø 3 mm	3 mm		884.00
- grown	Stopcock LUER-LOCK connection Ø 4 mm	4 mm	884.01	
	Tube with LUER-LOCK connector	3 mm		886.00



# ACCESSORIES HF CONNECTION CABLE BIPO FOR RESECTION IN SALINE SOLUTION

Instrument connector	Device connector		Product no.
WOLF S(a)line resectoscopes	Erbe VIO 300D	Bipolar cable; TUR/TCR; WOLF MF plug; L 4 m	20196-119
	Erbe VIO 3	BIPOLAR CABLE; MF-U MF plug; L 4.5 m	21196-119
		HF connection cable bipo; L 3 m	8108.231
	KLS Martin	HF connection cable bipo; L 5 m	8108.251
		HF connection cable bipo; L 3 m	8108233
	R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108253

1 16




X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

## GREENLIGHT™ CONTINUOUS IRRIGATION LASER CYSTOSCOPE "MoXy™"

PARTICULARLY FOR THE USE OF MOXY™ LASER FIBERS

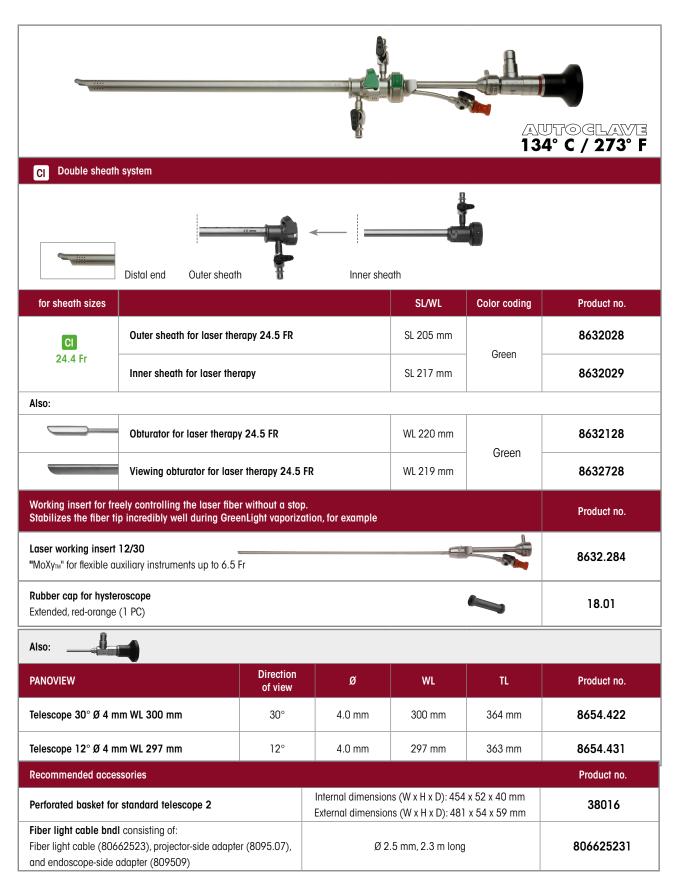



## GREENLIGHT™ CONTINUOUS IRRIGATION LASER RESECTOSCOPE "MoXy™"

PARTICULARLY FOR THE USE OF MOXY™ LASER FIBERS

spirit of excellence

			8			
					Tome is	
				3		
					134	TOGLAW: ° C / 273° F
CI Double sheath s	system					
	Distal end	_	Outer shee	ath 📳	Inner shed	ıth
for sheath sizes				SL/WL	Color coding	Product no.
CI	Outer sheath for resectose	ope 24 FR		SL 189 mm	Green	8675424
24 Fr	Inner sheath for resectosc	ope 22 FR		SL 205 mm	Olegii	8675322
lso:	011	00.50				0/7000
	Obturator for resectoscope			WL 232 mm	Green	8673022
	Viewing obturator for rese	<u></u>	<u> </u>	SL 189 mm		8673122 8675426
GI 26 Fr	Outer sheath for resectosc	•		SL 189 mm	Yellow	8675324
ulso:	illier sileulii ioi reseciosc	ope 24 FK		3L 203 IIIII		0073324
	Obturator for resectoscope	24 FR		WL 233 mm		8673024
Ð	Viewing obturator for rese	ctoscope 24 FR	₹	WL 232 mm	Yellow	8673124
€===	Dilatations obturator f. res	ectoscope 24 F	-R	WL 247 mm		8673224
	eely controlling the laser fiber p incredibly well during Gree					Product no.
aser working insert						8632.284
MoXy™" for flexible au	uxiliary instruments up to 6.5 F	-r				0002.204
Rubber cap for hyste	roscope, extended, red-orange	e (1 PC)				18.01
ilso:	-					
ANOVIEW		Direction of view	Ø	WL	TL	Product no.
elescope 30° Ø 4 m	m WL 300 mm	30°	4.0 mm	300 mm	364 mm	8654.422
elescope 12° Ø 4 m		12°	4.0 mm	297 mm	363 mm	8654.431
Recommended acces	ssories					Product no.
erforated basket for	standard telescope 2			ns (W x H x D): 454 ons (W x H x D): 481		38016
Fiber light cable bnd Fiber light cable (806 and endoscope-side of	62523), projector-side adapte	r (8095.07),	Ø	2.5 mm, 2.3 m lon	9	806625231



WOLF

# CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH 26 FR "MoXy™"

FOR **BLUNT** ENUCLEATION OF THE PROSTATE

spirit of excellence

IX23 | Suject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

				(AU) 134	TOGLAVE °C/273°F
Cl Double sheat	Distal end	Outer shear	th	Inner shear	i th
for sheath sizes			SL/WL	Color coding	Product no.
(G)	Outer sheath for resectoscope 26 FR		SL 189 mm	Yellow	8675426
26 Fr	Inner sheath for laser therapy 24 FR		SL 203 mm	reliow	8675524
Also:					
	Obturator for resectoscope 24 FR		WL 232 mm	Yellow	8673324
	freely controlling the laser fiber without a stop. tip incredibly well during GreenLight vaporization	n, for example	_		Product no.
Laser working inse "MoXym" for flexible	auxiliary instruments up to 6.5 Fr				8632.284
Rubber cap for hys	steroscope, extended, red-orange (1 PC)				18.01

Also:					
PANOVIEW	Direction of view	Ø	WL	ΤL	Product no.
Telescope 30° Ø 4 mm WL 300 mm	30°	4.0 mm	300 mm	364 mm	8654.422
Telescope 12° Ø 4 mm WL 297 mm	12°	4.0 mm	297 mm	363 mm	8654.431
Recommended accessories					Product no.

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
<b>Fiber light cable bndl</b> consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

Perforated basket for standard telescope 2

Fiber light cable (80662523), projector-side adapter (8095.07),


Fiber light cable bndl consisting of:

and endoscope-side adapter (809509)

spirit of excellence

## GREENLIGHT™ CONTINUOUS IRRIGATION LASER CYSTOSCOPE "Freestyle"

PARTICULARLY FOR THE USE OF GREENLIGHT™ AND SIMILAR LASER FIBERS

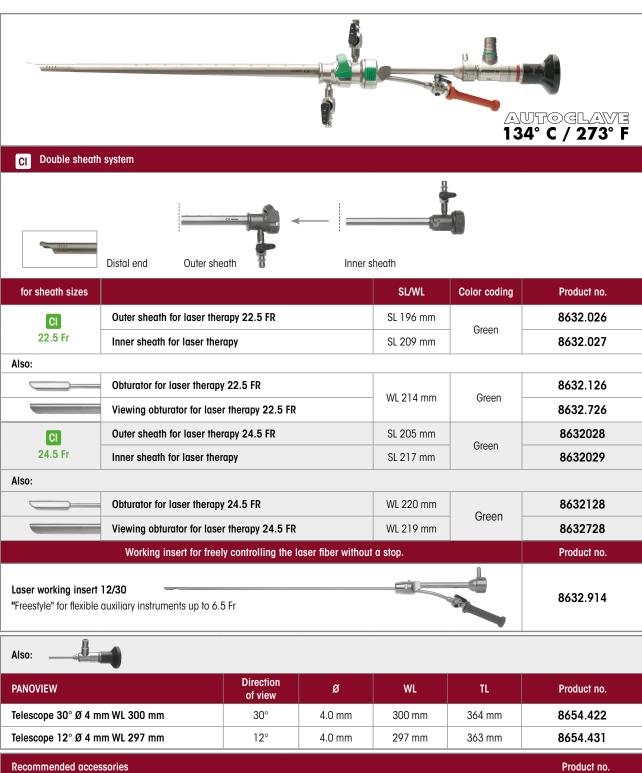

Internal dimensions (W x H x D): 454 x 52 x 40 mm

External dimensions (W x H x D): 481 x 54 x 59 mm

Ø 2.5 mm, 2.3 m long

38016

806625231





| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

## GREENLIGHT™ CONTINUOUS IRRIGATION LASER RESECTOSCOPE "Freestyle"

PARTICULARLY FOR THE USE OF GREENLIGHT™ AND SIMILAR LASER FIBERS

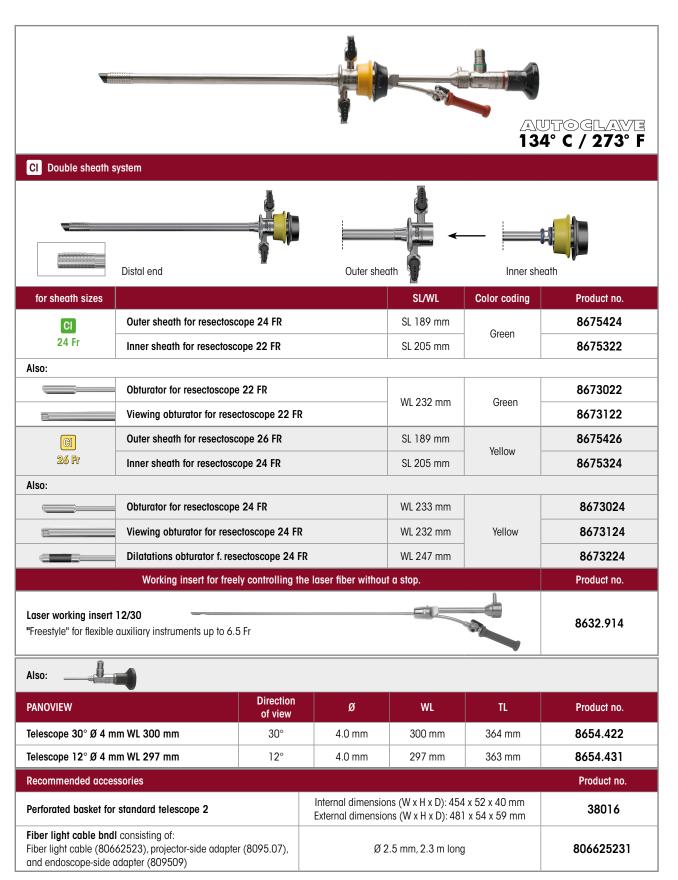

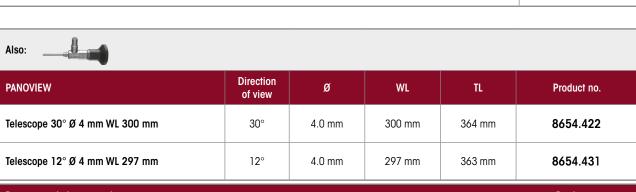

relescope 12 Ø 4 mm WL 277 mm	12	4.0 111111	277 111111	303 11111	0034.431
Recommended accessories					Product no.
Perforated basket for standard telescope 2		Internal dimensio External dimensio	ns (W x H x D): 454 ns (W x H x D): 48		38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809509)	8095.07),	Ø 2	?.5 mm, 2.3 m long	)	806625231

# CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH 26 FR "Freestyle"

FOR **BLUNT** ENUCLEATION OF THE PROSTATE

Commin.				134	JT⊚GLAVE 4° C / 273° F
Cl Double sheath s	system		fa)		
	Distal end	Outer shed	ath	Inner she	<b>Part</b>
for sheath sizes			SL/WL	Color coding	Product no.
<u>Cl</u>	Outer sheath for resectoscope 26 FR		SL 189 mm	Yellow	8675426
26 Fr	Inner sheath for laser therapy 24 FR		SL 206 mm	Tellow	8675524
Also:					
	Obturator for resectoscope 24 FR		WL 232 mm	Yellow	8673324
Working insert for fre	eely controlling the laser fiber without a stop.				Product no.
Laser working insert "Freestyle" for flexible	12/30 auxiliary instruments up to 6.5 Fr				8632.914



X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH


FOR LASER PROBES UP TO 7.5 FR





### CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH 26 FR

FOR **BLUNT** ENUCLEATION OF THE PROSTATE

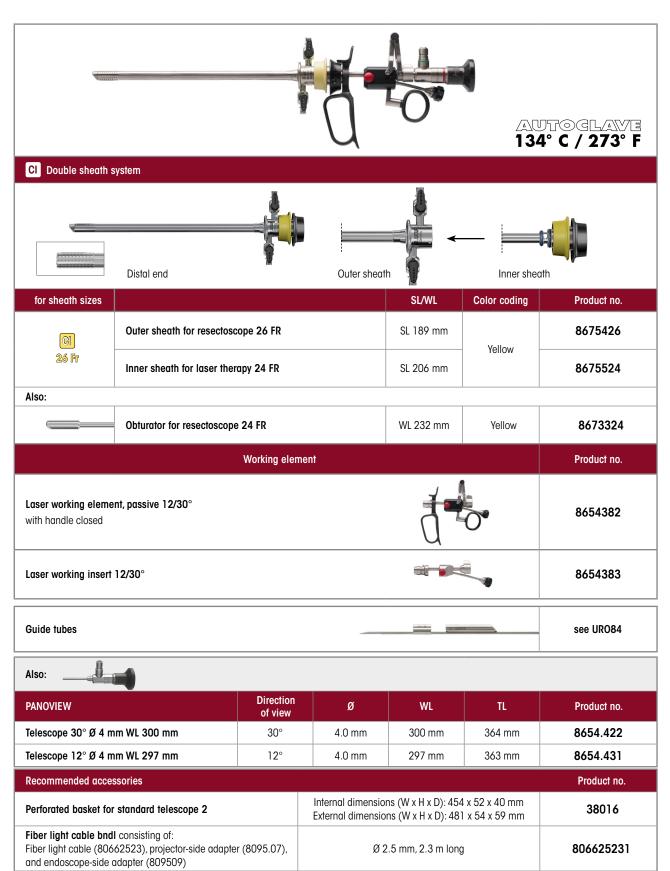






| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

### CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH, 26 FR

FOR ENUCLEATION OF THE PROSTATE

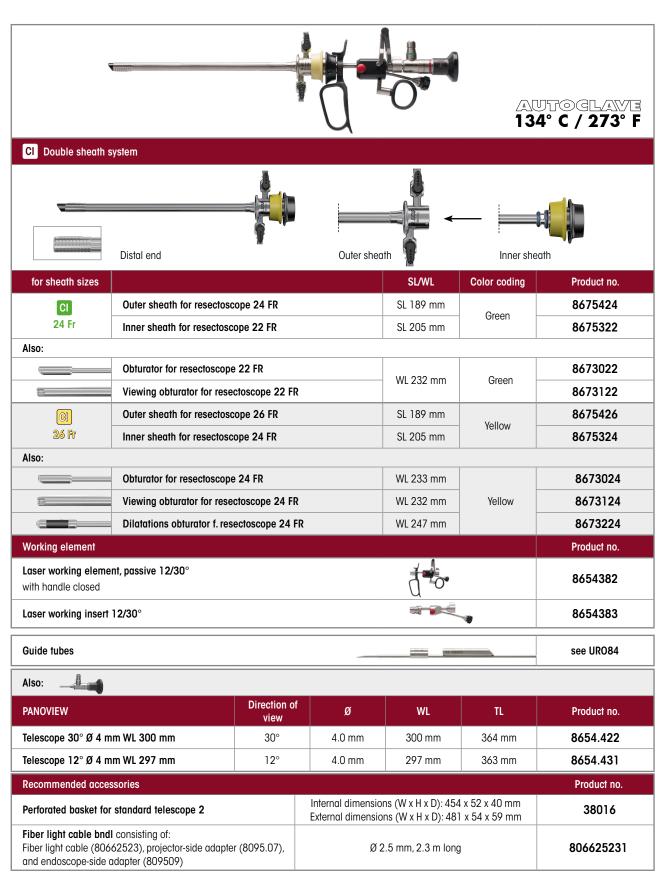



## LASER FIBER GUIDE TUBES FOR CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH 26 FR

Laser fiber guide tubes for inner shed	rth 24 Fr	Fr	Capacity	Product no.
	Guide tube laser therapy 1,000 µm 22 FR	22 Fr	1,000 µm	8654990
with lateral guide, distal end straight	Guide tube laser therapy 1,000 µm 24 FR	24 Fr	1,000 μm	8654991
	Guide tube laser therapy 600 µm 22 FR	22 Fr	600 µm	8654992
with lateral guide, distal end straight	Guide tube laser therapy 600 µm 24 FR	24 Fr	ουυ μπι	8654993
	Guide tube laser therapy 600 µm 22 FR	22 Fr	600 µm	8654994
with lateral guide, distal end slanted	Guide tube laser therapy 600 µm 24 FR	24 Fr	ουσ μπι	8654995
CC 1200	Guide tube laser therapy 600 µm 22 FR	22 Fr	600 µm	8654996
with lateral guide, distal end with ring	Guide tube laser therapy 600 µm 24 FR	24 Fr	σοσ μπι	8654997
CC 138	Curette 22–24 FR for prostate chips	From 22 Fr	600 µm	8654998

Note: Laser fiber guide tubes can only be used in conjunction with the laser working element (8654382) and laser working insert (8654383).




X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

### BIPOLAR ENUCLEATION

### CONTINUOUS IRRIGATION LASER ENUCLEATION SHEATH, 24/26 FR

FOR **BIPOLAR** ENUCLEATION OF THE PROSTATE

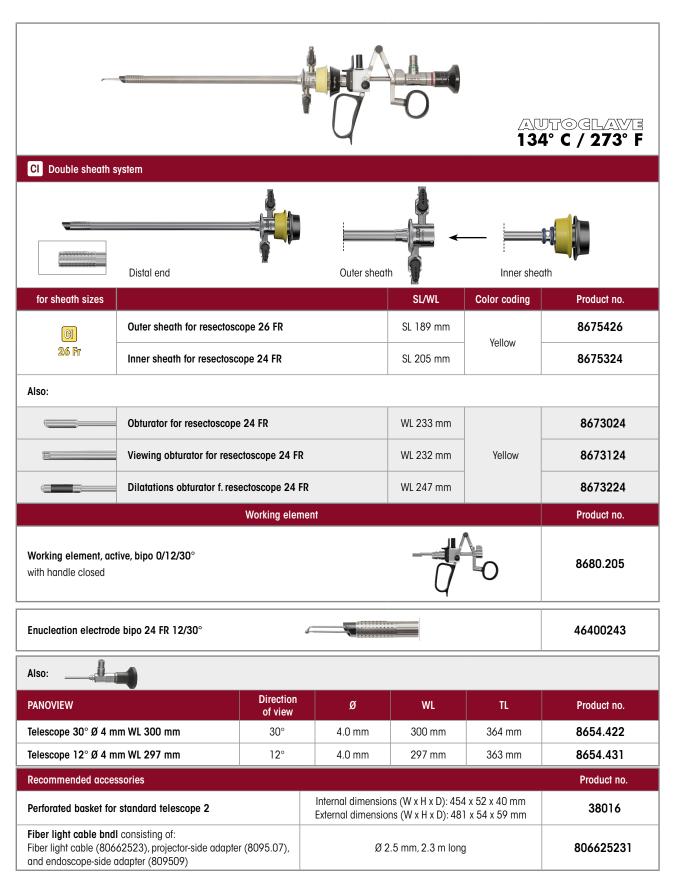






## IN COMBINATION WITH **SHARK** OUTER SHEATHS FOR TISSUE MORCELLATION

_			AU 134	JT⊚GLÆVE °C/273°F
PANOVIEW		WL	TL	Product no.
	FR WL 224 mm repiece, working channel for instruments up to 4.8 mm, of FR sheath and adapter, suction via morcellator	224 mm	386 mm	8970405
Autom. sealing elen	nent ID 5.7 mm	1		8920.311
Pressure ball for blow	ving air through channels			103.00
Tube with LUER-LOC	K connector			886.00
Cleaning brush Ø 1	1 mm TL 360 mm			6.01
or connecting "Mor	cescope" to the 24 Fr and 26 Fr continuous irrigation shea	ıths		Product no.
			.d-le.	
Shark adapter for M	orcescope 24/26 FR system	ě		8675026
_	system	uter sheath	Inner she	
_	system	uter sheath SL/WL	Inner she	
Cl Double sheath	system		Color coding	eath
Cl Double sheath	Distal end Ou	SL/WL		eath  Product no.
CI Double sheath  for sheath sizes  CI 22/24 Fr	Distal end  Outer sheath for resectoscope 24 FR	SL/WL SL 189 mm	Color coding	Product no. 8675424 8675322
Cl Double sheath  for sheath sizes  Cl 22/24 Fr	Distal end  Outer sheath for resectoscope 24 FR	SL/WL SL 189 mm	Color coding	Product no. 8675424 8675322 8673022
CI Double sheath  for sheath sizes	Distal end  Outer sheath for resectoscope 24 FR  Inner sheath for resectoscope 22 FR	SL/WL SL 189 mm SL 205 mm	Color coding Green	Product no. 8675424 8675322
for sheath sizes  Cl 22/24 Fr  Also:	Distal end  Outer sheath for resectoscope 24 FR  Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR	SL/WL SL 189 mm SL 205 mm  WL 232 mm SL 189 mm	Color coding Green	Product no.  8675424  8675322  8673022  8673122  8675426
for sheath sizes  Cl 22/24 Fr  Also:	Distal end  Outer sheath for resectoscope 24 FR  Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR	SL/WL SL 189 mm SL 205 mm  WL 232 mm	Green -	Product no.  8675424  8675322  8673022  8673122
for sheath sizes  C1 22/24 Fr  Also:	Outer sheath for resectoscope 24 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR Inner sheath for resectoscope 24 FR	SL/WL  SL 189 mm  SL 205 mm  WL 232 mm  SL 189 mm  SL 205 mm	Green -	Product no.  8675424  8675322  8673022  8673122  8675426  8675324
for sheath sizes  Cl 22/24 Fr  Also:	Distal end  Outer sheath for resectoscope 24 FR  Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR  Inner sheath for resectoscope 24 FR  Obturator for resectoscope 24 FR	SL/WL SL 189 mm SL 205 mm  WL 232 mm SL 189 mm SL 205 mm	Green - Yellow -	Product no.  8675424  8675322  8673022  8673122  8675426  8675324
for sheath sizes  C1 22/24 Fr  Also:	Outer sheath for resectoscope 24 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR Inner sheath for resectoscope 24 FR	SL/WL  SL 189 mm  SL 205 mm  WL 232 mm  SL 189 mm  SL 205 mm	Green -	Product no.  8675424  8675322  8673022  8673122  8675426  8675324





### IN COMBINATION WITH **SHARK** OUTER SHEATHS FOR TISSUE MORCELLATION

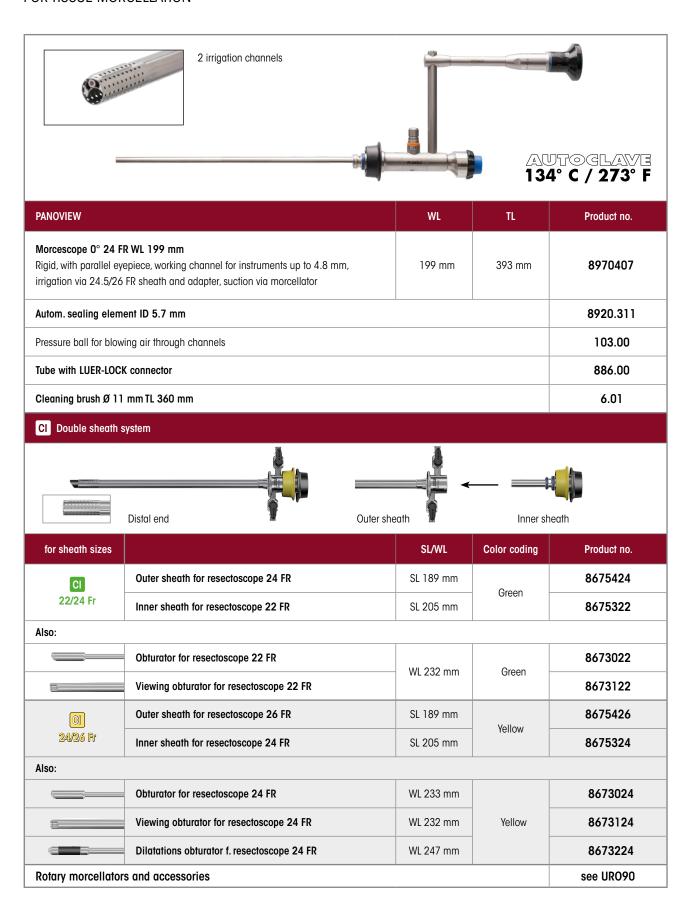





### IN COMBINATION WITH **E-LINE** OUTER SHEATHS FOR TISSUE MORCELLATION

_			134	T⊙GL⁄∆VE ° C / 273° F
PANOVIEW		WL	TL	Product no.
-	FR WL 224 mm eyepiece, working channel for instruments up to 4.8 mm, 6 FR sheath and adapter, suction via morcellator	224 mm	386 mm	8970405
Autom. sealing eler	nent ID 5.7 mm	'		8920.311
Pressure ball for blo	owing air through channels			103.00
Tube with LUER-LOC	CK connector			886.00
Cleaning brush Ø 1	1 mm TL 360 mm			6.01
for connecting "Mo	rcescope" to the 24 Fr and 26 Fr continuous irrigation sheath	S	TL	Product no.
E-Line adapter for N	Morcescope 26 FR		40 mm	8970.026
CI Double sheath	system			
		8		
	Distal end Outer sheath Inc	ner sheath		
for sheath sizes	Distal end Outer sheath Ini	ner sheath SL/WL	Color coding	Product no.
for sheath sizes	Distal end Outer sheath Int  Outer sheath for resectoscope 24.5 FR		Color coding  Green	Product no. 8655.334
for sheath sizes	**	SL/WL		
for sheath sizes  CI 22/24.5 Fr	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR	SL/WL SL 191 mm SL 203 mm		8655.334 8655.344
for sheath sizes  CI 22/24.5 Fr	Outer sheath for resectoscope 24.5 FR	SL/WL SL 191 mm	Green	8655.334
for sheath sizes  CI 22/24.5 Fr	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR	SL/WL SL 191 mm SL 203 mm		8655.334 8655.344
for sheath sizes  CI 22/24.5 Fr  Also:	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR	SL/WL SL 191 mm SL 203 mm WL 230 mm	- Green -	8655.334 8655.344 8654.16
for sheath sizes  Cl 22/24.5 Fr  Also:	Outer sheath for resectoscope 24.5 FR  Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR	SL/WL SL 191 mm SL 203 mm WL 230 mm WL 232 mm	Green	8655.334 8655.344 8654.16 8415.11
for sheath sizes  CI 22/24.5 Fr  Also:	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR	SL/WL SL 191 mm SL 203 mm WL 230 mm WL 232 mm SL 191 mm	- Green -	8655.334 8655.344 8654.16 8415.11 8655.374
for sheath sizes  CI 22/24.5 Fr  Also:	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR	SL/WL SL 191 mm SL 203 mm WL 230 mm WL 232 mm SL 191 mm	Green - Yellow -	8655.334 8655.344 8654.16 8415.11 8655.374
for sheath sizes  CI 22/24.5 Fr  Also:	Outer sheath for resectoscope 24.5 FR Inner sheath for resectoscope 22 FR  Obturator for resectoscope 22 FR  Viewing obturator for resectoscope 22 FR  Outer sheath for resectoscope 26 FR Inner sheath for resectoscope 24 FR	SL/WL  SL 191 mm  SL 203 mm  WL 230 mm  WL 232 mm  SL 191 mm  SL 204 mm	- Green -	8655.334 8655.344 8654.16 8415.11 8655.374 8655.384



## ROTARY MORCELLATORS/ACCESSORIES FOR THE MORCESCOPE

	for single use (PU = 3 PCS, in individual sterile packaging)	WL	Ø	Product no.
<i><b>Spiranha</b></i>	Rotary morcellator Ø 4.8 mm WL 335 mm	335 mm	4.8 mm	49700113
	Rotary morcellator Ø 4.8 mm WL 385 mm (for morcellator telescopes from other manufacturers)	385 mm	4.8 mm	49700103

	for multiple use	WL	Ø	Product no.
<i><b>SPIranha</b></i>	Rotary morcellator Ø 4.8 mm WL 350 mm	350 mm	4.8 mm	8970.011
	Rotary morcellator Ø 4.8 mm WL 385 mm (for morcellator telescopes from other manufacturers)	385 mm	4.8 mm	8970010


Recommended accessories		Product no.
Perforated basket for Morcescope with small parts sieve  Holds: standard telescope, for machine reprocessing, sterilization (steam and low-temperature), storage, and transport,	Internal dimensions (W x H x D): 451 x 65 x 164 mm External dimensions (W x H x D): 467 x 75 x 172 mm	38012
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 3.5 mm, 2.3 m long	806635231



### TISSUE MORCELLATOR

spirit of excellence

### FOR MORCELLATION AFTER LASER ENUCLEATION OF THE PROSTATE

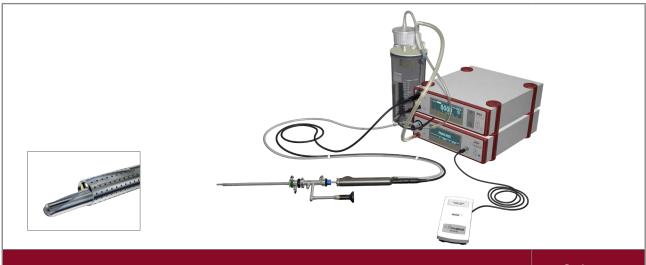

		Product no.
Suction pump bndl	consisting of: Suction pump with LCD display, 100–240 V AC, 50/60 Hz (2208001), 1-pedal footswitch (2030108), bottle holder (64031.381), sound absorber (PU = 3 PCS) (35100.115), RECTO PUMP connection tube (8170.6554), overflow protection/bacteria filter (PU = 10 PCS) (2228.901), secretion container, 2 I (8170.655), and power cable, 3 m long (2440.03)	22080019
Tube for suction	Single use (PU = 10 PCS)	41702208
Collecting container	Disposable (PU = 10 PCS)	2208120
Motor Control Unit 2303 for motor handpiece	50/60 Hz, 100–240 V AC	2303.001
Also: Power cable	Cable length 3 m	2440.03
Motor handpiece max. 6,000 rpm	consisting of:  Motor handpiece max. 6,000 rpm (8564.021), connection cable, WL 3 m (8564.851), sealing insert – open (15178145)	8564122
Rotary morcellator Ø 4.8 mm WL 335 mm	(PU = 3 PCS) in individual sterile packaging	49700113
Rotary morcellator Ø 4.8 mm WL 385 mm	(PU = 3 PCS) in individual sterile packaging for morcellator telescopes <i>from other manufacturers</i>	49700103
Rotary morcellator Ø 4.8 mm WL 350 mm		8970.011
Rotary morcellator Ø 4.8 mm WL 385 mm		8970010



IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

## MEGA Pulse 70°

### 70 W HOLMIUM: YAG LASER SYSTEM FOR STONE AND BPH THERAPY



	Product no.
MegaPulse 70⁺	
Laser surgical device tower EU bndl	
consisting of:	
MegaPulse 70+ laser surgical device tower 70 W (2286007)	
2x laser protection goggles (OBM003603)	
1x key set (2286525)	
1x door contact plug (2286520)	
2x blast shield with mounting (OAM001523)	22860070
1x filling bottle with tube (IAM000088)	
1x 2-pedal footswitch (2030232)	
1x fiber-stripping forceps for stripping laser fibers, 0.3 to 1.0 mm (2286523)	
1x fiber-stripping forceps for stripping laser fibers, 0.1 to 0.4 mm (2286527)	
1x ceramic cutter with silicone pad (AGM000080)	
1x accessories box for MegaPulse (KBM000103)	
1x power cable TL 3 m (2286230)	





MEGA Pulse 70⁺	22860070
Device properties	
Display	12" touchscreen
Power	70 watts
Laser type	Holmium:YAG laser (Ho:YAG)
Wavelength	2,100 nm (2.1 μm)
Operating principle	Pulsed
Energy	200-5,000 mJ
Pulse duration	Adjustable (50–1,100 μs)
Pilot beam	Green: 532 nm, < 5 mW, can be set to continuous or flashing
Max. operating temperature	10–30 °C
Storage temperature	Min. +5 °C, max. 40 °C
Power supply	
Voltage	200–230 V, 50/60 Hz, < 32 A
Frequency	3–60 Hz
Dimensions and weights	
Dimensions (W x H x D)	595 x 1,200 x 1,074 mm
Weight	200 kg



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.





Sterile (PU= 1 PC)		Core diameter							
		200 μm	200 µm	272 µm	365 µm	550 µm	800 µm	1,000 μm	Product no.
	Power laser fiber Ø 200 μm, disposable	•							487502200
	Laser fiber Ø 200 μm, disposable		•						487501200
	Laser fiber Ø 272 μm, disposable			•					487501272
Single use	Laser fiber Ø 365 μm, disposable				•				4875013650
	Laser fiber Ø 550 μm, disposable					•			487501550
	Laser fiber Ø 800 μm, disposable						•		487501800
	Laser fiber Ø 1,000 µm, disposable							•	4875011000
	Power laser fiber Ø 200 μm, reusable	•							87502200
	Laser fiber Ø 200 μm, reusable		•						87501200
o o	Laser fiber Ø 272 μm, reusable			•					87501272
Multiple use	Laser fiber Ø 365 μm, reusable				•				875013650
2	Laser fiber Ø 550 μm, reusable					•			87501550
	Laser fiber Ø 800 μm, reusable						•		87501800
	Laser fiber Ø 1,000 µm, reusable							•	875011000





Accessories			Product no.
		Ø 200–272 μm	AGM000053
Fiber-stripping forceps,	for elicenteral page (figure	Ø 365–400 µm	AGM000078
autoclavable	for stripping laser fibers	Ø 550-600 µm	AGM000052
		Ø 800 µm	AGM000064
Fil	for this is a love floor	Ø 0.1–0.4 mm	2286527
Fiber-stripping forceps	for stripping laser fibers	Ø 0.3–1.0 mm	2286523
Ceramic cutter with silicone pad		AGM000080	
Filling bottle with tube		IAM000088	
Laser protection goggles (Also suitable for glasses-wearers)			OBM003603
2-pedal footswitch	pedal footswitch		
Key set		2286525	
Door contact plug			2286520
Blast shield with mounting		OAM001523	
Power cable TL 3 m		2286230	
Accessories box for MegaPulse		KBM000103	
Adapter cable  CEE coupling, 3-pin 32 A 6 h 230 V AC blue (on the device side) and CEE plug, 5-pin 32 A 6 h 400 V AC red (in-house)			100-201-0518

Machine reprocessing		Product no.
Perforated basket for laser fiber	Holds: Laser fiber, for machine reprocessing, sterilization (steam and low-temperature), storage, and transport; internal dimensions (W x H x D): 231 x 52 x 223 mm external dimensions (W x H x D): 248 x 72 x 239 mm	38001
Also: Fixing ring Ø 34.6 mm	for holding instruments during machine reprocessing, sterilization (steam and low-temperature), storage, and transport, $\emptyset$ 34.6 x 2.62 mm, PU = 5 PCS	643301262



## Pulvis 60<sup>†</sup>

60 W THULIUM FIBER LASER (TFL) FOR STONE THERAPY AND ENDOSCOPIC ENUCLEATION OF THE PROSTATE (EEP)



Pulvis 60+

60 W thulium fiber laser (TFL)

PFMS00006

IX23 | Suject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.



## Pulvis 60<sup>†</sup>

## 60 W THULIUM FIBER LASER (TFL) TECHNICAL DATA

Pulvis 60⁺	PFMS00006
Device properties	
Display	Fold-out, rotatable touchscreen display (rotates 90° to the right and 180° to the left)
Operating temperature	15–30 °C (at a room temperature between 25 °C and 30 °C, operation is guaranteed with a maximum output power of up to 40 W)
Storage/transport temperature	Min. +5 °C/max. 40 °C
Atmospheric pressure	800-1,060 hPa
Operating humidity	30–85 %, non-condensing
Max. noise level	< 70.0 dB
Equipment	
Cooling method	Air cooling system
Power supply	
Mains + frequency	100–240 V AC, 50/60 Hz
Power consumption	1,000 VA
Regulatory standards	
Classification according to the Medical Devices Directive 93/42/EEC	Class IIb
Laser classification according to IEC/EN 60825-1:2014	Class 4
Pilot beam classification according with IEC/EN 60825-1:2014	Class 3R
Dimensions and weights	
Weight	100 kg
Dimensions (W x H x D)	470 x 1,156 x 810 mm 470 x 940 x 810 mm – display closed




# PUVIS 60\* 60 WTHULIUM FIBER LASER (TFL) TECHNICAL DATA

Pulvis 60+ PFMS00006 Laser source specifications Laser type Thulium fiber-laser Wavelength  $1,940 \text{ nm} \pm 20 \text{ nm}$ 60 W (pulsed/CW) Maximum output power 0.02-6 J Pulse energy Pulsed/CW Operating mode Pulse duration  $50 \ \mu s - CW$ 1-2,500 Hz Frequency of recurrence Large selection of laser fibers (see next page) Delivery system (sterile, disposable, and reusable) Green 532 nm (adjustable) < 5 mW, class 3R Pilot beam Goggles 1940 D LB4



## Pulvis 60<sup>†</sup>



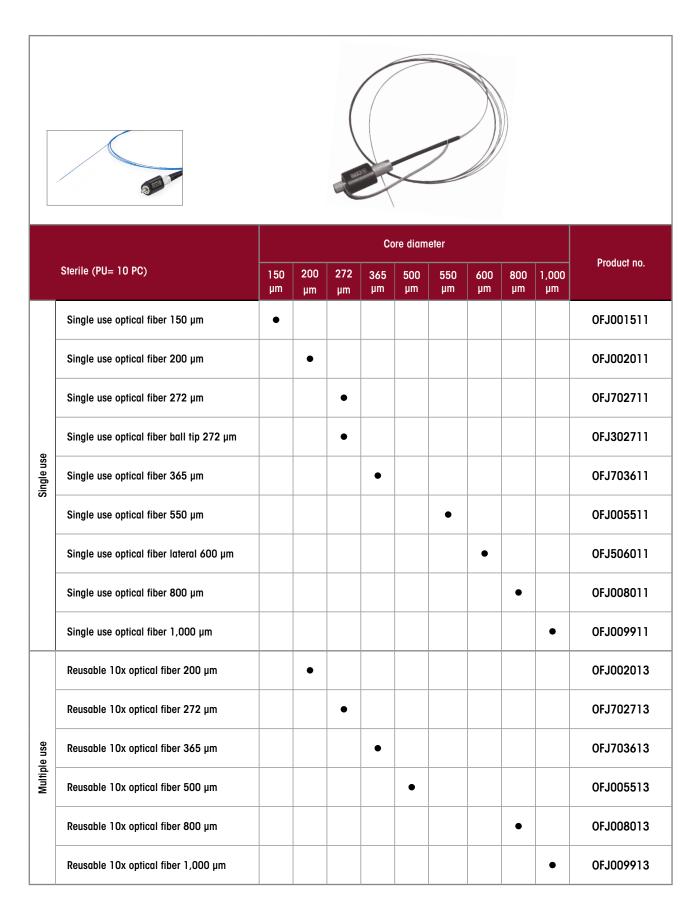


| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# PUIVIS 60<sup>†</sup> ACCESSORIES

Accessories	Product no.
Interlock Conn. Medical Devices Binder	EAM000045.00
Кеу	MBQ000190.00
Power cord-5m-spina Shuko 16A EUR	EAM001440.00
Fiberstripper optical fibers Ø300-1000 µm	OBM001079.00
Fiberstripper optical fibers Ø100-400 µm	OBM001080.00
Case salsa 1650 no brand accessories	KBM000103.01
Ceramic fiber cutter with slipcase	AGM000080.00
Goggle protection f18.P1d09.1003	OBM003778.00
Optical blast shield for tfl ext-access	OAM002112.00

Machine reprocessing		Product no.
Perforated basket for laser fiber	Holds: Laser fiber, for machine reprocessing, sterilization (steam and low-temperature), storage, and transport; internal dimensions (W x H x D): 231 x 52 x 223 mm external dimensions (W x H x D): 248 x 72 x 239 mm	38001
Also: Fixing ring Ø 34.6 mm	for holding instruments during machine reprocessing, sterilization (steam and low-temperature), storage, and transport, $\emptyset$ 34.6 x 2.62 mm, PU = 5 PCS	643301262

### HF GENERATOR 2260

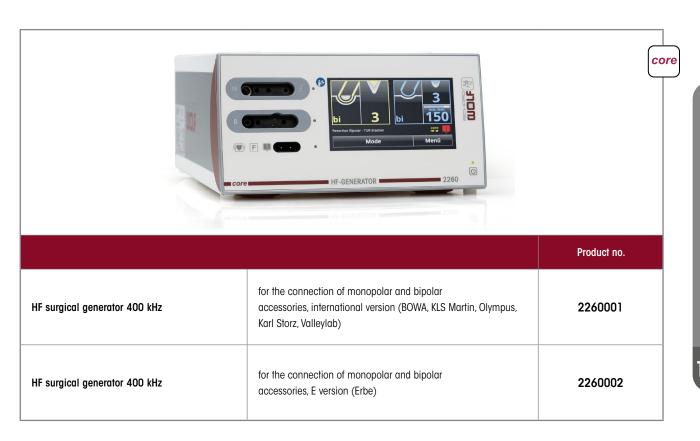

Accessories required	Cable length	Product no.
Footswitch, 2 pedals L 5 m with fixed connection cable, reusable		2260021
Neutral electrode for use with high-frequency surgical device, foil bag with 5 neutral electrodes (PU = 50 PCS)		1280H
Mono HF neutral electrode cable, L 4.5 m	4.5 m	2260031
Power cable	3.0 m	2440.03
Bipo HF connection cable L 3 m	3.0 m	8108233
Bipo HF connection cable L 5 m	5.0 m	8108253



### HF GENERATOR 2260

### TECHNICAL DATA

HF surgical generator 400 kHz		2260001/2260002	
Device properties			
Type of controls on housing front		Touch panel	
0.1.1	Max. cutting power	400 W	
Output power	Max. coagulation power	350 W	
LF and HF leakage currents		Acc. to DIN EN 60601-1 and DIN EN 60601-2-2	
Signal level		HF indicator 55 dB(A); adjustable 45–60 dB(A) Alarm 65 dB(A)	
Operating conditions		$+10~^{\circ}\text{C}$ to $+40~^{\circ}\text{C}$ , 30 % to 75 % rel. humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Storage and transport co	nditions	-20 °C to +60 °C, 10 % to 90 % rel humidity, 700 hPa to 1,060 hPa atmospheric pressure	
Power supply			
Mains + frequency		100–240 V AC, 50/60 Hz	
	without HF output	45 VA	
Power consumption	at max. output power	650 VA	
Current consumption		Max. 6.3 A	
Fuse		T 6.3 AH 250 V	
Regulatory standards			
Protection class to EN/IEC (UL 2601-1/CSA C22.2 N		I	
Electromagnetic compati	ibility (EMC)	EN/IEC 60601-1-2	
Medical Devices Directive	e 93/42/EEC	Class IIb	
Degree of protection aga (DIN EN/IEC 60529)	inst the ingress of liquids	IP XO	
Degree of protection aga	inst the ingress of solids	IP 2X	
Duty factor (duty cycle D	C)	Intermittent INT 10 s/30 s corresponding to 25 % DC	
Protection against electric shock		Type CF applied part, defibrillator-proof	
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weights			
Weight		10.2 kg (22.4 lbs)	
Dimensions (W x H x D)		300 x 159 x 419 mm	



## HF CONNECTION CABLE MONO 815XXX

Instrument connector	Device connector		Product no.
WOLF Resectoscopes		HF connection cable mono L 3 m	815.032
	ERBE (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	815.052
0		HF connection cable mono L 3 m	815.132
	ERBE (T series)	HF connection cable mono L 5 m	815.152
HF electrodes,		HF connection cable mono L 3 m	815.031
monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable	815.051
		HF connection cable mono L 3 m	815.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable	815.053
		HF connection cable mono L 3 m	815.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.054



## HF CONNECTION CABLE MONO 8106xxx

Instrument connector **Device connector** Product no. WOLF HF connection cable Instruments/surgical generator 8106.032 mono L 3 m HF connection cable ERBE (ACC/ICC/VIO)/BOWA (EU) 8106.052 R. Wolf HF surgical generator 400 kHz mono L 5 m 2260002 HF connection cable 8106.132 mono L 3 m HF connection cable 8106.152 mono L 5 m ERBE (T series) HF connection cable 8106.031 mono L 3 m HF electrodes, monopolar HF connection cable 8106.051 Martin (M-version)/Berchtold/ mono L 5 m Aesculap HF connection cable 8106.033 mono L 3 m Bovie/Valleylab/Erbe (Int.)/ HF connection cable BOWA (Int.) 8106.053 R. Wolf HF surgical generator 400 kHz mono L 5 m 2260001 HF connection cable 8106.034 mono L 3 m BOWA (Int./EU) Eschmann and other devices with HF connection cable 4 mm plugs 8106.054 R. Wolf HF surgical generator 400 kHz mono L 5 m 2260001/2260002

## HF CONNECTION CABLE BIPO 8108XXX

Instrument connector	Device connector		Product no.
WOLF Bipolar forceps		HF connection cable bipo; L 3 m	8108.032
	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.052
Noor Noor		HF connection cable bipo; L 3 m	8108.033
	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.053
		HF connection cable bipo; L 3 m	8108.031
	WOLF/Martin (M-version)/ Berchtold/Aesculap	HF connection cable bipo; L 5 m	8108.051
	EMC Dolley	HF connection cable bipo; L 3 m	8108035
Bipolar tweezers connection		HF connection cable bipo; L 3 m	8108.132
	ERBE (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.152
		HF connection cable bipo; L 3 m	8108.133
Resort	International / 2-pin Valleylab R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108.153
		HF connection cable bipo; L 3 m	8108.131
	Martin (M-version)/Berchtold/ Aesculap	HF connection cable bipo; L 5 m	8108.151
	EMC Dolley	HF connection cable bipo; L 3 m	8108135



IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

## HF CONNECTION CABLE BIPO FOR RESECTION IN SALINE SOLUTION

Instrument connector	Device connector		Product no.
WOLF S(a)line resectoscopes	Erbe VIO 300D	Bipolar cable; TUR/TCR; WOLF MF plug; L 4 m	20196-119
	Erbe VIO 3	BIPOLAR CABLE; MF-U MF plug; L 4.5 m	21196-119
		HF connection cable bipo; L 3 m	8108.231
	KLS Martin	HF connection cable bipo; L 5 m	8108.251
		HF connection cable bipo; L 3 m	8108233
	R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo; L 5 m	8108253

**Balancing module** 

for hysteroscopy and endourology,

fluid management for fluid balancing in combination with FLUID CONTROL 2225, mobile stand with integrated weighing cells and space for up to 4 irrigation fluid bags



### FLUID CONTROL 2225

### SUCTION IRRIGATION PUMP



Accessories		Product no.
Footswitch	Only for use in urology and within the indication TUR/enucleation, possibility of short-term increase in pressure if visibility is poor (Flush function)	2204901

Cable accessories		Product no.
Patch cable, RJ45 SFTP, 0.5 m	Cable length 0.5 m	72325378
Patch cable, RJ45 HRS TM11, 1.0 m	Cable length 1.0 m	72325429
Patch cable, RJ45 S/FTP CAT.6 10 m	Cable length 10 m	72325434
Plastic caps for network socket	(PU = 8 PCS)	5592105
Power cable	Cable length 3 m	2440.03

2225023



IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

### FLUID CONTROL 2225

### SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with LUER-LOCK connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
Accessories – disposable	Irrigation tube set with piercing spike, L 3 m	(PU = 10 PCS), with LUER-LOCK connection, sterile, disposable product	4171223
	Tube set with CARE-LOCK, L 3 m	(PU = 10 PCS), sterile, disposable product	4171224
	Suction irrigation tube set	(PU = 10 PCS), with piercing spike, sterile, disposable product, PVC	4171225
	Day irrigation tube set	(PU = 10 PCS), sterile, disposable product, PVC	4171226
	Patient irrigation tube set, sterile	(PU = 10 PCS), with LUER-LOCK connection, sterile, disposable product, PVC	4171227
	Note: Day tube and patient tube can only be us the day tube can be used for up to 20 patients.	red together. A new patient tube is required for each patient –	

Suction			Product no.
	Tube set for vacuum, incl. filter	with integrated hygiene filter, PU = 10 PCS, service life 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with LUER-LOCK, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
Accessories – reusable	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container 2 I	2 liters, with lid	8170.655
	Secretion container 2 I	2 liters, no lid	8170.6551
	Secretion container 2.5 I	2.5 liters	41706566
Accessories – disposable	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PU = 90 PCS) (41706564)	4170657
	Tube set for suction (2 connections)	Sterile, disposable product (PU = 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PU = 10 PCS) for connecting vacuum tube 2206207 to disposable container systems	0771019

#### TECHNICAL DATA **FLUID CONTROL 2225**

**FLUID CONTROL 2225** 2225001 **Device properties**  $+10~^{\circ}\text{C}$  to  $+40~^{\circ}\text{C}$ , 30 % to 75 % rel. humidity, 70 to 106 kPa atmospheric pressure Operating conditions 3,000 m max. altitude above sea level Storage and transport conditions -20 °C to +60 °C, 10 % to 90 % rel. humidity, 70 to 106 kPa atmospheric pressure **Power supply** 100-240 V AC, 50/60 Hz Mains + frequency 100 V/60 Hz 110 VA Power consumption 120 VA 240 V/50 Hz 100 V/60 Hz 1.10 A Current consumption 240 V/50 Hz 0.50 A Fuse T 3.15 AH, 250 V Regulatory standards Protection class (I, II) EN 60601-1/IEC 60601-1 Electromagnetic compatibility (EMC) EN 60601-1-2/IEC 60601-1-2 Medical Devices Directive 93/42/EEC Class IIb Housing protection rating (IP code) IP 21 Protection against electric shock Type BF applied part Device is not protected against explosions Degree of protection in the presence of flammable mixtures (do not operate this device in explosive atmospheres) -60 kPa Maximum suction vacuum Dimensions and weights Weight 8.8 kg Dimensions (W x H x D) 300 mm x 157 mm x 436 mm

Relevant application parameters				
	Hysteroscopy: 800 ml/min (max. flow, not adjustable)			
Nominal flow range	Endourology: 10–800 ml/min (max. flow)			
	Laparoscopy: 0.1–1.8 I/min (max. flow)			
Suction power	Max. 2 I/min			
	Hysteroscopy: 15–200 mmHg			
Starting nominal pressure range	Endourology: 15-90 mmHg/20-120 cmH20			
	Laparoscopy: 300 mmHg (not adjustable)			
Pressure	0–300 mmHg			
Deficit	-9,990 to +9,990 ml/0 to 99.9 l			


| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA FLUID CONTROL 2225

Balancing module	2225023
Device properties	
Operating conditions	+10 °C to +40 °C, 30 % to 75 % rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level
Storage and transport conditions	-20 °C to +60 °C, 10 % to 90 % rel. humidity, 70 to 106 kPa atmospheric pressure
Regulatory standards	
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2
Housing protection rating (IP code)	IP 21
Maximum load of container scale	16 kg/4 containers of 3 l each
Maximum load of bag scale	23 kg/4 bags of 5 l each
Dimensions and weights	
Weight	15.4 kg
Dimensions (W x H x D)	618 mm x 1,064 mm x 618 mm

Footswitch	2204901
Power supply	
Power supply connection	Max. 24 V
Power consumption	Max. 0.1 A
Regulatory standards	
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1
Housing protection rating (IP code)	IP X8
Plug	7-pin circular connector
Cable length	4.5 m
Dimensions and weights	
Weight	300 g
Dimensions (W x H x D)	66 mm x 27 mm x 91 mm



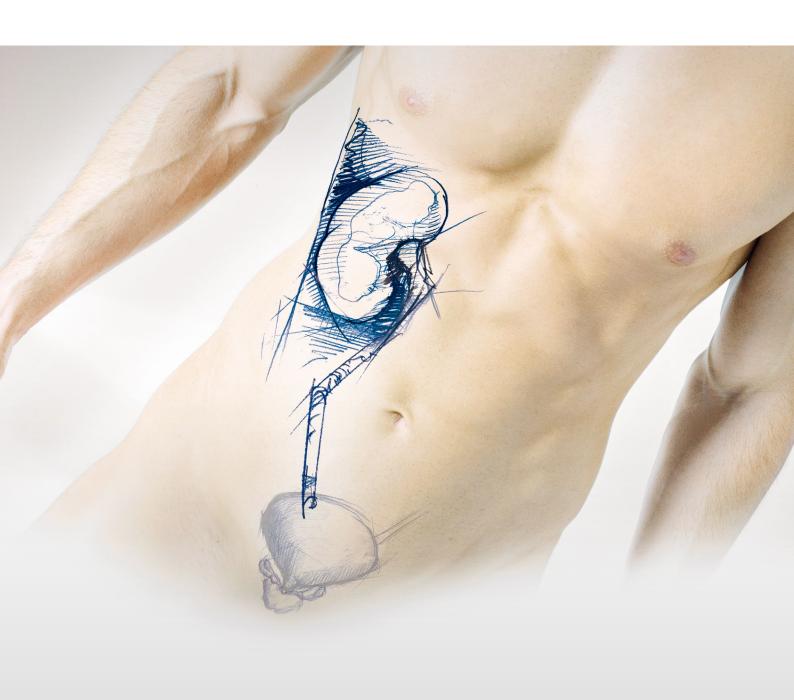

**UPPER URINARY TRACT** 



### **UPPER URINARY TRACT**

URETE	RORENOSCOPY
	" URETERORENOSCOPE / FIBER URETERORENOSCOPES / CONTINUOUS IRRIGATION RORENOSCOPES
FLEXIB	LE FIBER URS 270° – THE VIPER
FLEXIB	LE 2-CHANNEL CONTINUOUS IRRIGATION LASER URS – THE COBRA
FLEXIB	LE 1-CHANNEL SENSOR URETERORENOSCOPES - BOA vision / BOA vision EF
FLEXIB	LE 2-CHANNEL SENSOR URETERORENOSCOPES – COBRA vision / COBRA vision EF
DISPOS	SABLE SENSOR URETERORENOSCOPE – RIWO D-URS
NEPHR	OSCOPY
DILATO	RS FOR PERCUTANEOUS UNIVERSAL NEPHROSCOPES
MINI N	EPHROSCOPE BY LAHME
PERCU	TANEOUS UNIVERSAL NEPHROSCOPE, "DRESDEN MODEL"
PERCU	TANEOUS UNIVERSAL NEPHROSCOPES
FLEXIB	LE FIBER NEPHROSCOPE
LASER	ENERGY SOURCES
"MEGA	PULSE 70+" HOLMIUM:YAG LASER (Ho:YAG)
"PULVI	S 60+" THULIUM FIBER LASER (TFL)
SUCTIO	ON IRRIGATION PUMP
ELLIID	CONTROL 2225



### ULTRA-THIN FIBER URETERORENOSCOPE


WITH LATERAL EYEPIECE



spirit of excellence



AUTOGLAVE 134° C / 273° F



	WL	ΤL	Direction of view	Endoscope tip/Sheath tube	Working channel	Product no.
Ureterorenoscope 5° 4.5/6.5 FR WL 430 mm Atraumatically shaped tip	430 mm	555 mm	5°	4.5/6.5 Fr	3 Fr	8701.534


Recommended accessories					
Flex. grasping forceps 3 FR WL 530 mm					
Flex. biopsy forceps 3 FR WL 530 mm					
Handle for E-Line ureterorenoscopes					
Guide element for ureterorenoscope for LITHOCLAST handpieces		8702.251			
for inserting auxiliary instruments of 1–6 FR: <b>universal sealing valve 1–6 FR</b> , sterile (PU = 5 PCS)					
Membrane holder standard					
Membrane holder with Luer					
<b>Seal Ø 7.5 mm</b> (PU = 10 pcs)		89.101			
Perforated basket, upper urinary tract 1 with small part basket  Internal dimensions (W x H x D): 619 x 65 x 124 mm External dimensions (W x H x D): 35 x 75 x 132 mm					
Marking pen, black					
Fiber light cable bndl consisting of:  Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)  Ø 2.5 mm, 2.3 m long					
Auxiliary instruments		see URO119			



### FIBER URETERORENOSCOPE

#### WITH STRAIGHT EYEPIECE



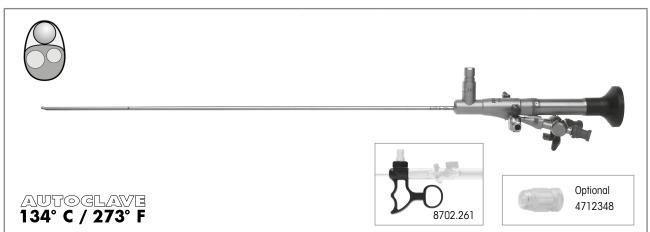

	WL	ΤL	Direction of view	Endoscope tip/Sheath tube	Working chan- nel	Product no.
Ureterorenoscope 5° 6/7.5 FR WL 430 mm Atraumatically shaped tip	430 mm	558 mm	5°	6/7.5 Fr	1 x 4 Fr or 2 x 2.2 Fr	8702.514
Ureterorenoscope 12° 8/9.8 FR WL 430 mm Atraumatically shaped tip	430 mm	558 mm	12°	8/9.8 Fr	1 x 5 Fr or 2 x 3 Fr	8703.514

Recommended accessories	Product no.	
Handle for E-Line ureterorenoscopes	8702.261	
for inserting auxiliary instruments of 1–6 FR: <b>universal sealing va</b>	4712348	
Perforated basket, upper urinary tract 1 with small part basket	38003	
Marking pen, black	38201.948	
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Auxiliary instruments	see URO119	




### FIBER URETERORENOSCOPE

#### WITH LATERALLY OFFSET EYEPIECE



spirit of excellence

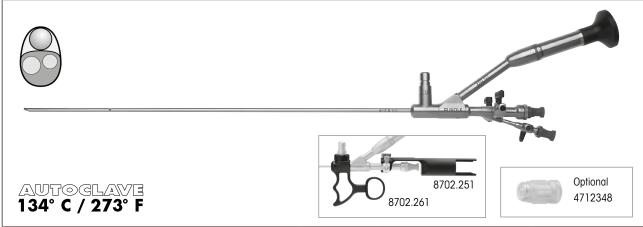

	WL	ΤL	Direction of view	Endoscope tip/Sheath tube	Working chan- nel	Product no.
Ureterorenoscope 5° 6/7.5 FR WL 430 mm Atraumatically shaped tip	430 mm	599 mm	5°	6/7.5 Fr	1 x 4 or (2 x 2.2) Fr	8702.524
Ureterorenoscope 12° 8/9.8 FR WL 430 mm Atraumatically shaped tip	430 mm	599 mm	12°	8/9 Fr	1 x 5 or (2 x 3) Fr	8703.524
Ureterorenoscope 12° 8.5/11.5 FR WL 430 mm Atraumatically shaped tip	430 mm	599 mm	12°	8.5/11.5 Fr	1 x 6 or (2 x 4) Fr	8704.524

Recommended accessories	Product no.			
Handle for E-Line ureterorenoscopes		8702.261		
Guide element for ureterorenoscope for LITHOCLAST handpieces		8702.251		
for inserting auxiliary instruments of 1–6 FR: universal sealing valv	re 1–6 FR, sterile (PU = 5 PCS)	4712348		
Membrane holder standard	Membrane holder standard			
Membrane holder with Luer connection	15256.456			
<b>Seal Ø 7.5 mm</b> (PU = 10 pcs)	89.101			
Perforated basket, upper urinary tract 1 with small part basket	38003			
Marking pen, black	38201.948			
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	806625231			
Auxiliary instruments		see URO119		




### FIBER URETERORENOSCOPE

#### WITH LATERAL EYEPIECE



spirit of excellence

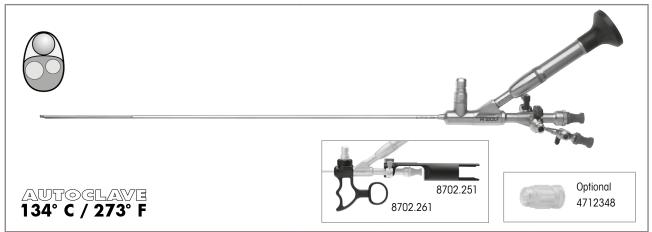

	WL	ΤL	Direction of view	Endoscope tip / Sheath tube	Working channel	Product no.
Ureterorenoscope 5° 6/7.5 FR WL 430 mm Atraumatically shaped tip	430 mm	563 mm	5°	6/7.5 Fr	1 x 4 Fr or 2 x 2.2 Fr	8702.534
Ureterorenoscope 12° 8/9.8 FR WL 430 mm Atraumatically shaped tip	430 mm	563 mm	12°	8/9.8 Fr	1 x 5 Fr or 2 x 3 Fr	8703.534

Recommended accessories	Product no.	
Handle for E-Line ureterorenoscopes		8702.261
Guide element for ureterorenoscope for LITHOCLAST handpieces		8702.251
for inserting auxiliary instruments of 1–6 FR: universal sealing va	lve 1–6 FR, sterile (PU = 5 PCS)	4712348
Membrane holder standard		15256.393
Membrane holder with Luer	15256.456	
<b>Seal Ø 7.5 mm</b> (PU = 10 pcs)	89.101	
Perforated basket, upper urinary tract 1 with small part basket	38003	
Marking pen, black	38201.948	
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	806625231	
Auxiliary instruments	,	see URO119




# WOLF

spirit of excellence

### CONTINUOUS IRRIGATION URETERORENOSCOPE

WITH STRAIGHT EYEPIECE

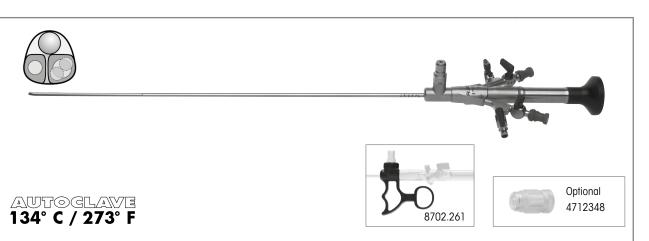

	WL	ΤL	Direction of view	Endoscope tip / Sheath tube	Working channel	Product no.
Ureterorenoscope 5° 6.5/8.5 FR WL 430 mm Atraumatically shaped tip	430 mm	572 mm	5°	6.5 / 8.5 Fr	Working channel 1: 1 x 4 (2 x 2.2) Fr Working channel 2: 2.4 Fr	8708.518

Recommended accessories		Product no.
Handle for E-Line ureterorenoscopes	8702.261	
for inserting auxiliary instruments of 1–6 FR: universal sealing va	4712348	
Perforated basket, upper urinary tract 1 with small part basket	38003	
Marking pen, black		38201.948
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Auxiliary instruments		see URO119




# WOLF

#### spirit of excellence

### CONTINUOUS IRRIGATION URETERORENOSCOPE

WITH LATERAL EYEPIECE

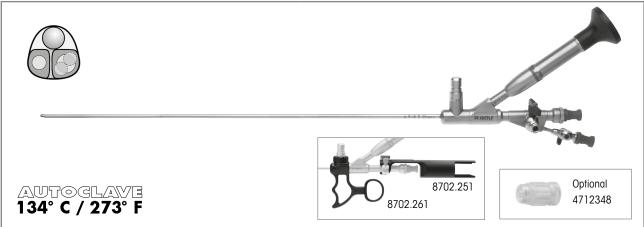

	WL	TL	Direction of view	Endoscope tip/Sheath tube	Working channel	Product no.
Ureterorenoscope 5° 6.5/8.5 FR WL 430 mm Atraumatically shaped tip	430 mm	563 mm	5°	6.5/8.5 Fr	1 x 4.2 Fr and 2 x 2.4 Fr	8708.534
Ureterorenoscope 12° 8/9.8 FR WL 430 mm Atraumatically shaped tip	430 mm	563 mm	12°	8/9.8 Fr	1 x 5 or (2 x 3) Fr	8703.534

Recommended accessories				
Handle for E-Line ureferorenoscopes				
Guide element for ureterorenoscope for LITHOCLAST handpieces		8702.251		
for inserting auxiliary instruments of 1–6 FR: universal sealing va	ulve 1–6 FR, sterile (PU = 5 PCS)	4712348		
Membrane holder standard		15256.393		
Membrane holder with Luer connection				
Seal Ø 7.5 mm (PU = 10 pcs)				
Perforated basket, upper urinary tract 1 with small part basket  Internal dimensions (W x H x D): 619 x 65 x 124 mm External dimensions (W x H x D): 635 x 75 x 132 mm				
Marking pen, black		38201.948		
Fiber light cable bndl consisting of:  Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)  Ø 2.5 mm, 2.3 m long				
Auxiliary instruments		see URO119		

#### FORCEPS AND SCISSORS

# SMALL MODULAR SYSTEM **HySafe**


 $360^{\circ}$  rotatable, can be flushed through, easy-click

Grasping forceps jaw insert with	sheath	Handle with overload protection	Complete instrument • Jaw section • Handle		
	Product no.	Fr	WL	8083.001	Product no.
Biopsy forceps bndl	8952.6008	5	550 mm	•	8952.6002
Grasping forceps bndl with mouse tooth	8952.6118	4	550 mm	•	8952.6112
	8959.6218	5	425 mm	•	8959.6212
	8952.6218	5	550 mm	•	8952.6212
<b>Grasping forceps bndl</b> with pike-mouth jaws, long	8959.6808	5	425 mm	•	8959.6802
distribution .	8954.6808	5	550 mm	•	8954.6802
Grasping forceps bndl with pike-mouth jaws, short	8952.6508	5	550 mm	•	8952.6502



# THEVIPER

# FLEXIBLE FIBER URETERORENOSCOPES $270^{\circ}$

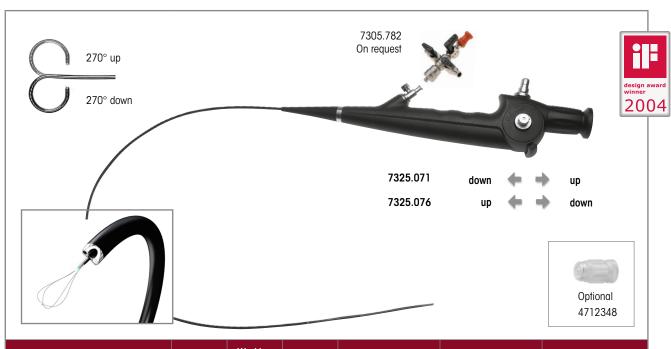

	Outer Ø	Working and laser fiber channel Ø	WL/TL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Fiber ureterorenoscope 9.6 FR WL 680 mm Slanted distal tip	9.6 Fr	2x	WL 680 mm	•		7325.071
Articulation +270°/-270° Direction of view 0°, angle of view 85°		3.6 Fr	TL 1005 mm		•	7325.076
Also:						
Pressure equalization valve						163.904
Leakage tester for flex. endoscopes						163.903
Adapter						163914
Clamping element, orange (20 PCS)						15394144
Cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS)						7990001

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
Auxiliary instruments		see URO121





### FLEXIBLE FIBER URETERORENOSCOPES

#### TECHNICAL DATA/ACCESSORIES AND AUXILIARY INSTRUMENTS

Fiber ureterorenoscope 9.6 FR WL 680 mm	7325.071/7325.076
Distal tip	Slanted distal tip 6 Fr
Sheath diameter	9.6 Fr
Number of working channels	2
Working/irrigation channel diameter	3.6 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Direction of view	0°
Angle of view	85°
Eyepiece	Adjustment eyepiece with diopter adjustment
Control lever	with position catch at 0° when instrument tip is extended and brake mechanism for locking

Accessories and auxiliary instr	Accessories and auxiliary instruments					
	Adapter with 2 irrigation valves and 1 instrument port, quick-release mechanism	7305.782				
	Also: Luer sealing cap	15023205				
	RIWO rubber cap, capacity 0.8 mm	88.01				
	Universal sealing valve 1–6 FR  for inserting auxiliary instruments of 1–6 Fr	4712348				
	Adapter for machine leakage tests	163.905				



### FLEXIBLE FIBER URETERORENOSCOPES


#### ACCESSORIES AND AUXILIARY INSTRUMENTS

		Fr	WL	ΤL	Product no.
\.	Flex. grasping forceps 3 FR WL 530 mm	3	530 mm	665 mm	828.605
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	720 mm	828.051
Fine toothing	Flex. grasping forceps 3 FR WL 920 mm	3	920 mm	1,050 mm	828.651
	Flex. biopsy forceps 5 FR WL 550 mm	5	550 mm	720 mm	829.051
	Flex. biopsy forceps 3 FR WL 530 mm	3	530 mm	665 mm	829.603
	Flex. biopsy forceps Ø 3 FR WL 920 mm	3	920 mm	1,055 mm	829.601
	Flex. biopsy forceps 4 FR WL 600 mm	4	600 mm	730 mm	8734.606
Pike-mouth jaws	Flex. grasping forceps 4 FR WL 600 mm	4	600 mm	750 mm	8734.656
Mouse tooth	Flex. grasping forceps 4 FR WL 600 mm	4	600 mm	750 mm	8734.686
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	700 mm	8735.685
>	Flex. grasping forceps 3.5 FR WL 550 mm, fine toothing	3.5	550 mm	700 mm	8953.60
9===	Coag. electrode mono 5 FR WL 600 mm	5	600 mm	-	8599.80
	Coag. electrode mono 3 FR WL 580 mm	3	580 mm	-	823.031
	Hook electrode mono 2.4 FR WL 600 mm	2.4	600 mm	-	823.221





# FLEXIBLE FIBER 2-CHANNEL CONTINUOUS IRRIGATION LASER **URETERORENOSCOPES**

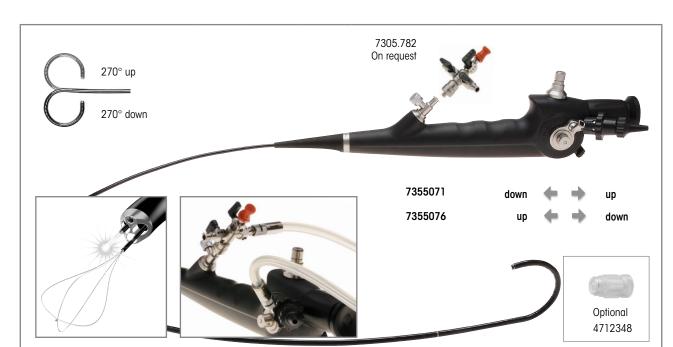

	Outer Ø	Working and laser fiber channel Ø	WL/TL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Fiber ureterorenoscope 9.9 FR WL 680 mm Slanted distal tip	9.9 Fr	2x	WL 680 mm	•		7326071
Articulation +270°/-270° Direction of view 0°, angle of view 85°		3.3 Fr	3.3 Fr TL 1,010 mm		•	7326076
Fiber ureterorenoscope bndl consisting of: Fiber ureterorenoscope 9.9 FR WL 680 mm (7326071), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), adapter (163914), clamping element (15394144), and cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001)				•		732607111
Fiber ureterorenoscope bndl consisting of: Fiber ureterorenoscope 9.9 FR WL 680 mm (7326076), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), adapter (163914), clamping element (15394144), and cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001)				•	732607611	

Recommended accessories	Product no.	
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
for auxiliary instruments, see URO125		






# FLEXIBLE FIBER 2-CHANNEL CONTINUOUS IRRIGATION LASER URETERORENOSCOPES

TECHNICAL DATA

Fiber ureterorenoscope 9.9 FR WL 680 mm	7326071/7326076
Distal tip	Slanted distal tip 6 Fr
Sheath diameter	9.9 Fr
Number of working channels	2
Working/irrigation channel diameter	3.3 Fr
Laser/irrigation channel diameter	3.3 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Direction of view	0°
Angle of view	85°
Eyepiece	Adjustment eyepiece with diopter adjustment
Control lever	with position catch at 0° when instrument tip is extended and brake mechanism for locking

ENDOCAM LOGIC HD equipment		Product no.
TOOLS TO SEE TO SEE	ENDOCAM Logic HD Lite controller bndl  consisting of: ENDOCAM Logic HD Lite camera control unit (5525201) Handheld remote control USB (5525401) USB flash memory 8 GB (56540028) HDMI/DVI-D cable, lockable, 3.0 m (103843) Power cable (2440.03) 5525 DVD license open-source software (64360816)	55252011





# FLEXIBLE FIBER 2-CHANNEL CONTINUOUS IRRIGATION LASER URETERORENOSCOPES

ACCESSORIES AND AUXILIARY INSTRUMENTS


ACCE22OKIE2 AIND AUXI				
		Outer Ø	WL	Product no.
	Flex. biopsy forceps Ø 3 Fr WL 920 mm	3 Fr	920 mm	829.601
	Flex. grasping forceps 3 Fr WL 920 mm	3 Fr	920 mm	828.651
	Adapter with 2 irrigation valves and 1 instrument port, quick-	7305.782		
	Also: Luer sealing cap	15023205		
	RIWO rubber cap, capacity 0.8 mm	88.01		
	Universal sealing valve 1–6 FR  for inserting auxiliary instruments of 1–6 Fr	4712348		
	Adapter for machine leakage tests	163.905		
	Laser adjustment unit bndl			
	Also: clamping element, orange (20 pcs)			15394144





#### FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### FOR ENDOCAM Logic 4K CONTROLLER

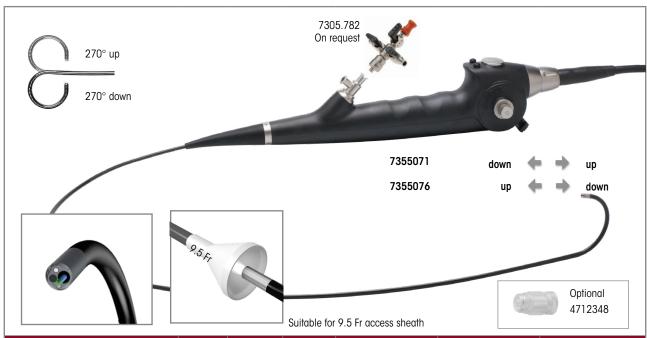

	Outer Ø	Working/ irrigation channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Sensor ureterorenoscope 8.7 FR WL 680 mm Slanted distal tip	8.7 Fr	3.6 Fr	680 mm	•		7355071
Articulation +270°/-270° Direction of view 6.5°, angle of view 90°	0.711	3.011	000 111111		•	7355076
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 8.7 FR WL 680 mm (7355071), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), and cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001)			•		73550712	
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 8.7 FR WL 680 mm (7355076), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), and cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001)				•	73550762	

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
for auxiliary instruments, see URO128		•





# FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### TECHNICAL DATA

Sensor ureterorenoscope 8.7 FR WL 680 mm	7355071/7355076
Distal tip	Cylindrical, atraumatic, slanted distal stainless steel tip 6.6 Fr
Sheath diameter	8.7 Fr
Number of working channels	1
Working/irrigation channel diameter	3.6 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Angle of view	90°
Handle	Ergonomic handle design with axial cable outlet
Positioning of the working and irrigation channel in relation to the picture	At 6 o'clock
Endopicture	Square, 6x digital zoom; automatic white balance, light control, and focus
Compatible camera control unit	ENDOCAM Logic 4K ENDOCAM Logic HD

ENDOCAM LOGIC 4K – Video equipment		Product no.
50	ENDOCAM Logic 4K camera control unit bndl consisting of: ENDOCAM Logic 4K camera control unit (5525301) Handheld remote control (5525401) 1x USB flash memory 32 GB (72321829) 1x HDMI/HDMI cable, lockable, 3.0 m (103847) 1x power cable (2440.03)	55253011

# Bog

# FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### ACCESSORIES AND AUXILIARY INSTRUMENTS


		Outer Ø	WL	Product no.
	Flex. biopsy forceps Ø 3 Fr WL 920 mm	3 Fr	920 mm	829.601
A STATE OF THE STA	Flex. grasping forceps 3 Fr WL 920 mm	3 Fr	920 mm	828.651
	Laser fiber Ø 365 µm, disposable	365 µm		4875013650
	Laser fiber Ø 550 μm, disposable	550 µm		487501550
	Laser fiber Ø 365 μm, reusable	365 µm		875013650
,	Laser fiber Ø 550 μm, reusable	550 µm		87501550
	Adapter with 2 irrigation valves and 1 instrument port, quick-	7305.782		
	Also: Luer sealing cap	15023205		
	RIWO rubber cap, capacity 0.8 mm	88.01		
	Universal sealing valve 1–6 FR  for inserting auxiliary instruments of 1–6 Fr	4712348		
	Adapter for machine leakage tests	163.905		





### FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### FOR ENDOCAM Flex HD CONTROLLER

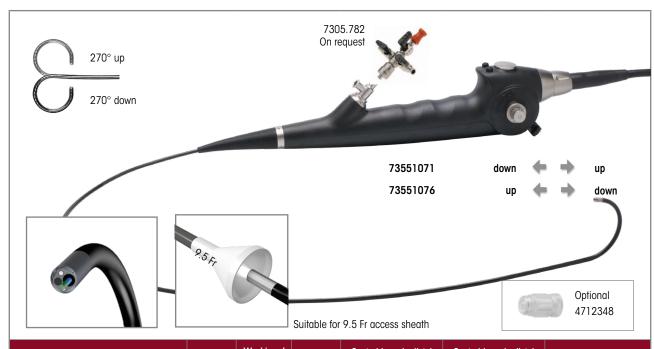

	Outer Ø	Working / irrigation channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Sensor ureterorenoscope 8.7 FR WL 680 mm Slanted distal tip	8.7 Fr	3.6 Fr	680 mm	•		73551071
Articulation +270°/-270° Direction of view 6.5°, angle of view 90°	0.711	0.011	000 11111		•	73551076
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 8.7 FR WL 680 pressure equalization valve (163.904), leakage tester for flex. endoscopes (163 cleaning brush Ø 2 mm, TL 1,200 mm (leakage tester)	.903), and	,		•		735510712
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 8.7 FR WL 680 pressure equalization valve (163.904), leakage tester for flex. endoscopes (163 cleaning brush Ø 2 mm, TL 1,200 mm (1)	.903), and	,			•	735510762

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
for auxiliary instruments, see URO131		



# BOS

# FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### TECHNICAL DATA

Sensor ureterorenoscope 8.7 FR WL 680 mm	73551071/73551076
Distal tip	Cylindrical, atraumatic, slanted distal stainless steel tip 6.6 Fr
Sheath diameter	8.7 Fr
Number of working channels	1
Working/irrigation channel diameter	3.6 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Angle of view	90°
Handle	Integrated LED illumination, ergonomic handle design with axial camera cable
Positioning of the working and irrigation channel in relation to the picture	At 9 o'clock
Endopicture	Square, 1.5x zoom, detail enhancement, automatic white balance and brightness control, no focusing necessary
Compatible camera control unit	ENDOCAM Logic 4K ENDOCAM Logic HD



| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with



# FLEXIBLE 1-CHANNEL SENSOR URETERORENOSCOPES

#### ACCESSORIES AND AUXILIARY INSTRUMENTS


		Outer Ø	WL	Product no.
	Flex. biopsy forceps Ø 3 Fr WL 920 mm	3 Fr	920 mm	829.601
	Flex. grasping forceps 3 Fr WL 920 mm	3 Fr	920 mm	828.651
	Laser fiber Ø 365 µm, disposable	200 μm		487501200
	Laser fiber Ø 550 μm, disposable	272 μm		487501272
	Laser fiber Ø 365 μm, reusable	200 μm		87501200
,	Laser fiber Ø 550 μm, reusable	272 μm		87501272
	Adapter with 2 irrigation valves and 1 instrument port, quick-	7305.782		
	Also: Luer sealing cap	15023205		
	RIWO rubber cap, capacity 0.8 mm	88.01		
	Universal sealing valve 1–6 FR  for inserting auxiliary instruments of 1–6 Fr	4712348		
	Adapter for machine leakage tests	163.905		



# COBRA

#### FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES

### FOR ENDOCAM Logic 4K CONTROLLER

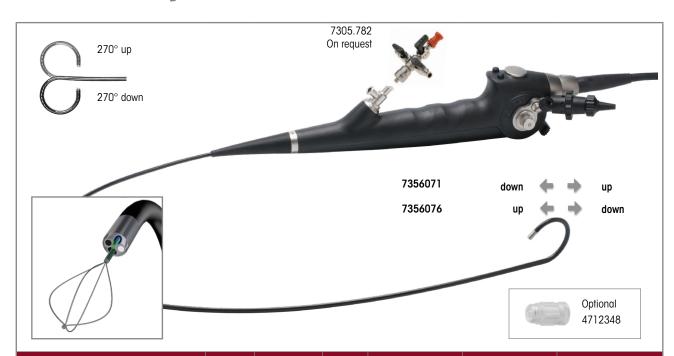

	Outer Ø	Working/laser channel	WL	direction – articulation downward	direction – articulation upward	Product no.
Sensor ureterorenoscope 9.9 FR WL 680 mm	0.0 5**	Working channel 3.6 Fr	(00	•		7356071
Slanted distal tip Articulation +270°/-270° Direction of view 0°, angle of view 120°	9.9 Fr	laser channel 2.4 Fr	680 mm		•	7356076
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 9.9 FR WL 680 mm (7356071), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), adapter (163914), cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001), cleaning brush Ø 0.85 mm, TL 1,200 mm (PU = 10 PCS) (7990003), and clamping element, orange (20 pcs) (15394144)			•		73560712	
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 9.9 FR WL 680 mm (7356076), pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.903), adapter (163914), cleaning brush Ø 2 mm, TL 1,200 mm (PU = 10 PCS) (7990001), cleaning brush Ø 0.85 mm, TL 1,200 mm (PU = 10 PCS) (7990003), and clamping element, orange (20 pcs) (15394144)				•	73560762	

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
for auxiliary instruments, see URO134		



# 

### FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES

#### TECHNICAL DATA

Sensor ureterorenoscope 9.9 FR WL 680 mm	7356071/7356076
Distal tip	Cylindrical, atraumatic, slanted distal stainless steel tip 5.2 Fr
Sheath diameter	9.9 Fr
Number of working channels	2
Working/irrigation channel diameter	3.6 Fr
Laser/irrigation channel diameter	2.4 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Angle of view	90°
Handle	Ergonomic handle design with axial cable outlet
Positioning of the working and irrigation channel in relation to the picture	At 6 o'clock
Positioning of the laser and irrigation channel in relation to the picture	At 9 o'clock
Endopicture	Square, 6x digital zoom; automatic white balance, light control, and focus
Compatible camera control unit	ENDOCAM Logic 4K ENDOCAM Logic HD

ENDOCAM LOGIC 4K – Video equipment		Product no.
South State of the	ENDOCAM Logic 4K camera control unit bndl consisting of: ENDOCAM Logic 4K camera control unit (5525301) Handheld remote control (5525401) 1x USB flash memory 32 GB (72321829) 1x HDMI/HDMI cable, lockable, 3.0 m (103847) 1x power cable (2440.03)	55253011



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# 

#### FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES

#### ACCESSORIES AND AUXILIARY INSTRUMENTS


		Outer Ø	WL	Product no.
	Flex. biopsy forceps Ø 3 Fr WL 920 mm	3 Fr	920 mm	829.601
e de la companya de l	Flex. grasping forceps 3 Fr WL 920 mm	3 Fr	920 mm	828.651
	Adapter with 2 irrigation valves and 1 instrument port, quick-	release mechanisn	n	7305.782
	Also: Luer sealing cap	15023205		
	RIWO rubber cap, capacity 0.8 mm	88.01		
	Universal sealing valve 1–6 FR for inserting auxiliary instruments of 1–6 Fr	4712348		
	Adapter for machine leakage tests			163.905
	Laser adjustment unit bndl			15369108
	Also: clamping element, orange (20 pcs)			15394144



# COBRA

### FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES

#### FOR ENDOCAM Flex HD CONTROLLER

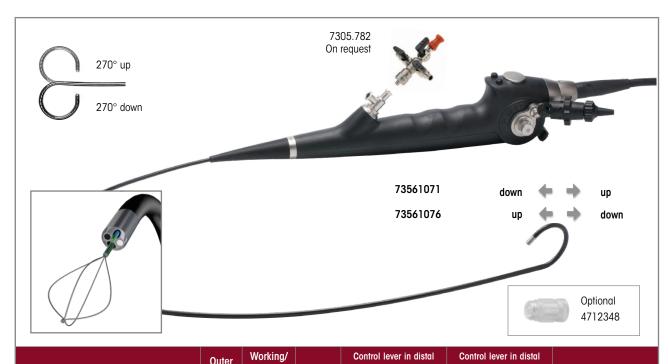

	Ø	Laser channel	WL	direction – articulation downward	direction – articulation upward	Product no.
Sensor ureterorenoscope 9.9 FR WL 680 mm Slanted distal tip	9.9 Fr	Working channel 3.6 Fr	680 mm	•		73561071
Articulation +270°/-270°  Direction of view 0°, angle of view 90°	7.711	Laser channel 2.4 Fr	000 11111		•	73561076
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 9.9 FR WL 680 m pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.9 cleaning brush Ø 2 mm, TL 1,200 mm (PL cleaning brush Ø 0.85 mm, TL 1,200 mm clamping element, orange (20 pcs) (1539)	03), adapt J = 10 PCS (PU = 10 l	rter (163914) (3) (7990001)	),	•		735610712
Sensor ureterorenoscope bndl consisting of: Sensor ureterorenoscope 9.9 pressure equalization valve (163.904), leakage tester for flex. endoscopes (163.9 cleaning brush Ø 2 mm, TL 1,200 mm (PL cleaning brush Ø 0.85 mm, TL 1,200 mm clamping element, orange (20 pcs) (1539)	03), adapt J = 10 PCS (PU = 10 l	ter (163914) (7990001)	, ),		•	735610762

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
for auxiliary instruments, see URO137		



# COBRA

# FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES

#### TECHNICAL DATA

Sensor ureterorenoscope 9.9 FR WL 680 mm	73561071/73561076
Distal tip	Cylindrical, atraumatic, slanted distal stainless steel tip 5.2 Fr
Sheath diameter	9.9 Fr
Number of working channels	2
Working/irrigation channel diameter	3.6 Fr
Laser/irrigation channel diameter	2.4 Fr
Articulation	270° upward, 270° downward
Working length	680 mm
Angle of view	90°
Handle	Integrated LED illumination, ergonomic handle design with axial camera cable
Positioning of the working and irrigation channel in relation to the picture	At 6 o'clock
Positioning of the laser and irrigation channel in relation to the picture	At 9 o'clock
Endopicture	Square, 1.5x zoom, detail enhancement, automatic white balance and brightness control, no focusing necessary
Compatible camera control unit	ENDOCAM Logic 4K ENDOCAM Logic HD

# COBRA

# FLEXIBLE 2-CHANNEL SENSOR URETERORENOSCOPES


#### ACCESSORIES AND AUXILIARY INSTRUMENTS

		Outer Ø	WL	Product no.
<b>&gt;</b>	Flex. biopsy forceps Ø 3 Fr WL 920 mm	3 Fr	920 mm	829.601
Auditoria	Flex. grasping forceps 3 Fr WL 920 mm	3 Fr	920 mm	828.651
-	Adapter with 2 irrigation valves and 1 instrument port, quick-	release mechanisr	n	7305.782
	Also: Luer sealing cap	15023205		
	RIWO rubber cap, capacity 0.8 mm	88.01		
	Universal sealing valve 1–6 FR for inserting auxiliary instruments of 1–6 Fr			4712348
	Adapter for machine leakage tests	163.905		
	Laser adjustment unit bndl			15369108
	Also: clamping element, orange (20 pcs)			15394144

| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


# D-URS

#### DISPOSABLE SENSOR URETERORENOSCOPE

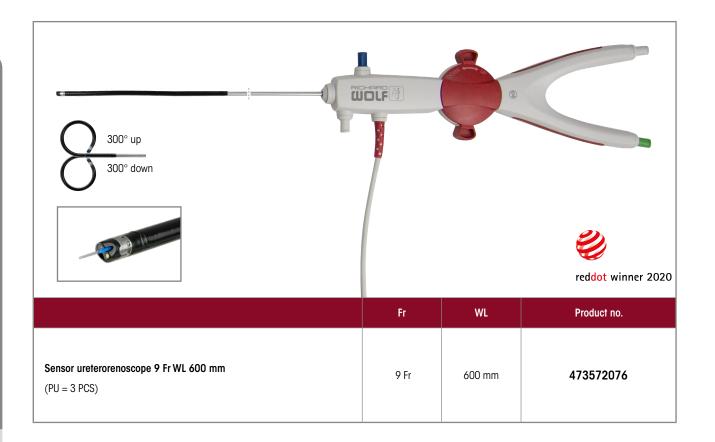

2.6



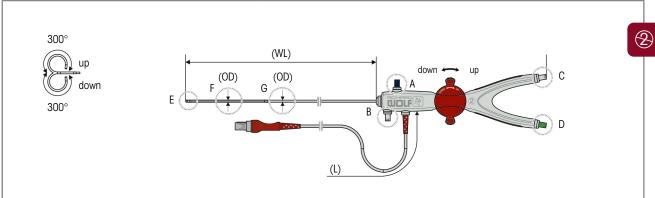

Sensor ureterorenoscope 9 Fr WL 600 mm	473572076
Working length (WL)	600 mm
Cable length (L)	2,500 mm
Outer diameter (OD) (flexible area) F	9 Fr
Outer diameter (OD) (semi-rigid area) G	8.1 Fr
Distal instrument tip E	6 Fr
Working channel <b>(C)</b>	3.6 Fr
Laser fiber channel (D)	1.65 Fr
Articulation	+/-300° (up/down)
Direction of view	0°
Angle of view	90°
Luer connection for inlet, color: blue A	Ø 3.0 mm
Luer connection for outlet, color: gray B	Ø 3.0 mm
Luer connection for working channel, color: gray C	Ø 3.0 mm
Luer connection for laser fiber channel, color: green D	Ø 3.0 mm
Operating conditions	Temperature: +10 °C to +40 °C, rel. humidity: 20 % to 75 %, atmospheric pressure: 700 hPa to 1,060 hPa
Storage conditions	Temperature: +5 °C to +30 °C, rel. humidity: 10 % to 70 %, atmospheric pressure: 700 hPa to 1,060 hPa

# D-URS

#### CAMERA CONTROL UNIT AND ACCESSORIES





#### Adapter for control unit 5525 ...... 5525410

The sensor ureterorenoscope is compatible with the following Richard Wolf camera control units\* using the adapter (5525410) for control unit 5525:

- 5525101 Logic HD camera control unit
- 2525301 Logic 4K camera control unit
- 5525201 Logic HD lite camera control unit
- \* Software version V2.0.9 or higher

ENDOCAM D camera control unit bndl	55221011
consisting of:	
1x ENDOCAM D camera control unit	5522101
1x Vector Plus coax cable 3.00 m DZG	R-0300-SW-GN
1x HDMI/DVI-D cable, lockable 3.0 m	103843
1x license for open-source software	72321911
1x power cable 3 m long	2440.03
(see rear for technical data)	
Also:	
Handheld remote control USB	5525401

Outer Ø		\\/I	Product	no
Hananeia remote d	CONTROL 02R :			55Z54UT

		Outer Ø	WL	Product no.	
Flex. biopsy forceps Ø 3 Fr WL 920 mm		3 Fr	920 mm	829.601	
Flex. grasping forceps 3 Fr WL 920 mm		3 Fr	920 mm	828.651	
		Ø	L	Product no.	
Power laser fiber Ø 200 µm, disposable		200 μm	3.0 m	487502200	
Laser fiber Ø 200 µm, disposable		200 μm	3.0 m	487501200	
Laser fiber Ø 272 µm, disposable		272 μm	3.0 m	487501272	
These particular laser fibers are compatible	with the Richard Wolf MegaPulse 30 <sup>4</sup>	and MegaPulse 70+ la	sers.		
				Product no.	

		Product no.
Universal sealing valve 1–6 FR (PU = 5 PCS) sterile, for single use for inserting auxiliary instruments 1–6 Fr		4712348
Luer sealing cap		15023205
RIWO rubber cap, capacity 0.8 mm		88.01





#### TECHNICAL DATA OF ENDOCAM D CAMERA CONTROL UNIT

D camera control unit	5522101		
Device properties			
Type of controls	Mechanical buttons		
Max. video signal resolution	1,920 x 1,080 pixels		
Brightness control	Automatic shutter control + automatic gain control		
Digital zoom	2.5x max.		
Operating conditions	+10 °C to +40 °C, 30 % to 75 % rel. humidity, atmospheric pressure 700 hPa to 1,060 -20 °C to +60 °C, 10 % to 90 % rel. humidity, atmospheric pressure 700 hPa to 1,060		
Storage and transport conditions			
Operating mode	Continuous operation		
Equipment			
IP rating IP 20			
Power supply			
Mains + frequency	100-240 V AC, 50/60 Hz		
Power consumption	32 VA		
Current consumption	0.32-0.13 A		
Fuse	T 1.25 AH 250 V		
Regulatory standards			
Safety	UL 2601-1/CSA C22.2 No.601.1 – for USA		
EMC	EN/IEC 60601-1-2		
Medical device class	Class 1		
Classification of applied part	CF		
Interfaces			
Video outputs	1x 3G-SDI, 1x HDMI		
USB port (on front panel, for external storage media)	USB 2.0 (FAT32/NTFS formatting)		
	Adjustable via DIP switches on housing rear		
Resolution (HDMI output)	SXGA Full HD	1,280 x 1,024 p (50 Hz) (5:4) 1,920 x 1,080 p (60 Hz) (16:9)	
Resolution (3G-SDI output)	1,920 x 1,080 p (60 Hz)		
Dimensions and weights			
Weight	2.3 kg		
Dimensions (W x H x D)	200 x 60 x 220 mm		

### **DILATORS**


#### FOR PERCUTANEOUS UNIVERSAL NEPHROSCOPES

			nwar	
	8955.185/.27		21	
				TOGLAVE ° C / 273° F
for dilatation of the puncture channel		Outer Ø	TL	Product no.

for dilatation of the puncture channel		Outer Ø	TL	Product no.
Dilator 6 FR	Cannulated	6 Fr	500 mm	8955.06
	consisting of: dilator 6 FR (8955.06)	6 Fr	500 mm	
	Telescopic dilator 9 FR (8955.091)	9 Fr		
Telescopic dilator 9–18 FR bndl	Telescopic dilator 12 FR (8955.121)	12 Fr	230 mm	8955.180
	Telescopic dilator 15 FR (8955.151)	15 Fr	230 111111	
	Telescopic dilator 18 FR (8955.181)	18 Fr		8955.180 8955270 8968.012
	consisting of: dilator 6 FR (8955.06)	6 Fr	500 mm	
	Telescopic dilator 9 FR (8955.091)	9 Fr		
	Telescopic dilator 12 FR (8955.121)	12 Fr		
Telescopic dilator 9–27 FR	Telescopic dilator 15 FR (8955.151)	15 Fr		9055270
bndl	Telescopic dilator 18 FR (8955.181)	18 Fr	230 mm	6933270
	Telescopic dilator 21 FR (8955.211)	21 Fr		
	Telescopic dilator 24 FR (8955.241)	24 Fr		
	Telescopic dilator 27 FR (8955.271)	27 Fr		
Dilator 12 FR	Cannulated, for one-step bouginage	12 Fr	320 mm	8968.012
Dilator 15 FR	Cannulated, for one-step bouginage	15 Fr	320 mm	8968.015
Dilator 30 FR	Fits the 27 Fr dilator from 8955.27	30 Fr	230 mm	8955.308
Dilator 9 FR	for inserting a second guide wire	9 Fr	600 mm	8962.19

#### MINI NEPHROSCOPE 15/18 FR

#### BY LAHME ALSO SUITABLE FOR CHILDREN AND ADOLESCENTS

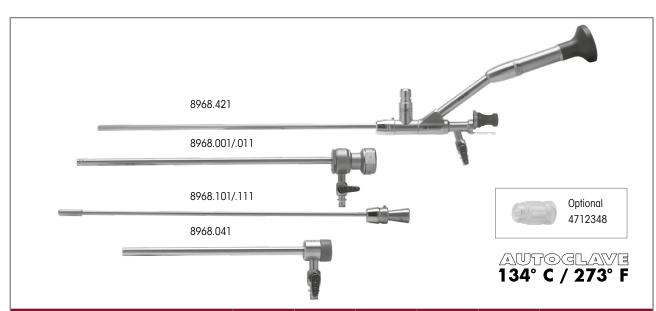

PANOVIEW	Direction of view	Ø	Maximum capacity	WL/SL	TL	Product no.
Nephroscope 12° 12 FR WL 225 mm with laterally offset eyepiece Working channel for instruments up to 6 FR	12°	12 Fr	6 Fr (2 mm)	WL 225 mm	406 mm	8968.421
Sheath for nephroscope 15 FR	-	15 Fr	12 Fr (4 mm)	SL 205 mm	-	8968.001
Obturator for nephroscope 15 FR	-	-	3.5 Fr (1.2 mm)	229 mm	-	8968.101
Sheath for nephroscope 18 FR Round, rotatable irrigation valve	-	18 Fr	15 Fr (5 mm)	SL 205 mm	-	8968.011
<b>Sheath for nephroscope 18 FR</b> Round, fixed irrigation valve	-	18 Fr	15 Fr (5 mm)	SL 150 mm	-	8968.041
Obturator for nephroscope 18 FR	-	-	3.5 Fr (1.2 mm)	WL 229 mm	-	8968.111

Recommended accessories	Product no.		
for inserting auxiliary instruments of 1–6 FR: <b>universal sealing vo</b>	ulve 1–6 FR, sterile (PU = 5 PCS)	4712348	
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231	
Perforated basket, upper urinary tract 1 with small part basket	Internal dimensions (W x H x D): 619 x 65 x 124 mm External dimensions (W x H x D): 635 x 75 x 132 mm	38003	
Marking pen	Color: black	38201.948	

MINI NEPHROSCOPE BY LAHME



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

4712348

#### **AUXILIARY INSTRUMENTS**

# FOR MINIATURE NEPHROSCOPE 15/18 FR LAHME



"One-step" bouginage		Outer Ø	TL	Product no.
Dilator 12 FR	Cannulated, for one-step bouginage	12 Fr	320 mm	8968.012
Dilator 15 FR	Cannulated, for one-step bouginage	15 Fr	320 mm	8968.015

Further accessories	Outer Ø	WL	Product no.
Sonotrode Ø 1.9 mm WL 361 mm	1.9 mm	361 mm	8962.519

LithoClast probe Ø 2.0 mm, WL 425 mm	2.0 mm	425 mm	8742.004
Membrane holder			15256.393
Membrane holder			15256.456
Seal Ø 7.5 mm	7.5 mm		89.101
_			

Universal sealing valve 1–6 FR, sterile (PU = 5 PCS)



# **AUXILIARY INSTRUMENTS**

#### FOR MINIATURE NEPHROSCOPE 15/18 FR LAHME

Grasping forceps jaw insert with s	sheath	Handle with overload protec- tion	Complete instrument  • Jaw section		
H <sub>y</sub> Safe	H <sub>y</sub> Safe			• Handle	
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl  Mouse tooth	8959.6218	5 Fr	425 mm	•	8959.6212
Grasping forceps bndl Pike-mouth jaws	8968.6808	6 Fr	425 mm	•	8968.6802


Grasping forceps		Outer Ø	WL	TL	Product no.	
	Rigid grasping forceps 6 FR WL 365 mm Three arms, detachable	6 Fr	365 mm	410 mm	8968.671	
	Grasping forceps jaw insert 6 FR Three arms, detachable	6 Fr	365 mm	-	8968.675	

MINI NEPHROSCOPE BY LAHME



# PERCUTANEOUS UNIVERSAL NEPHROSCOPE

"DRESDEN" MODEL

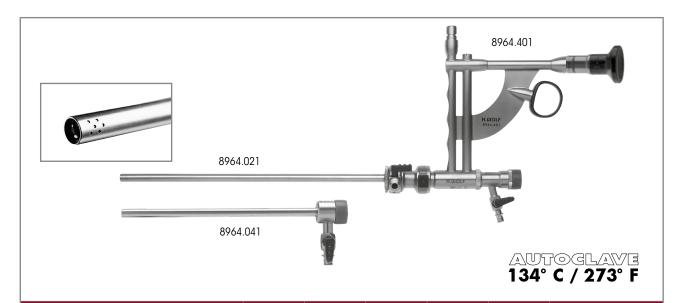


PANOVIEW	Direction of view	Ø	Maximum capacity	WL/SL	TL	Product no.
Nephroscope 12° 20.8 FR WL 224 mm with parallel eyepiece working channel for instruments up to 10.5 FR	12°	20.8 Fr	3.5 mm	WL 224 mm	387 mm	8964.401
Sheath for nephroscope 20.8 FR	-	20.8 Fr	-	SL 204 mm	-	8964.021
Obturator for nephroscope 20.8 FR	-	20.8 Fr		WL 230 mm	-	8964.121
Alternative:						
Sheath for nephroscope 24 FR	-	24 Fr	-	SL 204 mm	-	8965.041
Also: obturator for nephroscope 24 FR	-	24 Fr		WL 229 mm	-	8965.141
Amplatz sheath for nephroscope 24.3 FR		24.3 Fr	-	SL 150 mm	-	8964.041
Sealing element						15176.100

Option of optical percutaneous ureterotomy:		Product no.
Working element, urethrotome, passive 0°	Receptacle for stricture scalpels	8670.911
Telescope 0° Ø 3.3 mm WL 297 mm		8660.424
Scalpel 16.5 FR ceramic, lancet-shaped	12 o'clock cutting position, with ceramic cutter	8670.981



# PERCUTANEOUS UNIVERSAL NEPHROSCOPES

24 FR

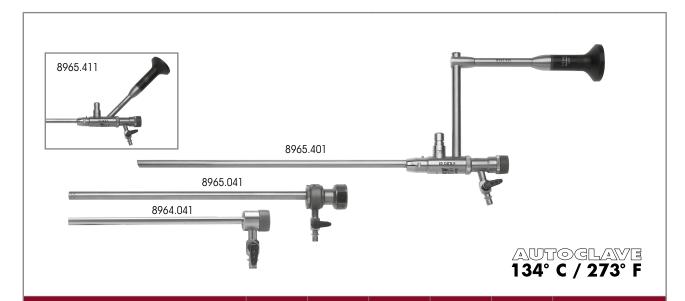

PANOVIEW	Direction of view	Ø	Maximum capacity	WL/SL	TL	Product no.
Nephroscope 20° 24 FR WL 224 mm with parallel eyepiece working channel for instruments up to 10.5 FR	20°	24 Fr	3.5 mm	WL 224 mm	387 mm	8965.401
Nephroscope 20° 24 FR WL 224 mm with lateral eyepiece working channel for instruments up to 10.5 FR	20°	24 Fr	3.5 mm	WL 224 mm	387 mm	8965.411
Sheath for nephroscope 20.8 FR	-	20.8 Fr	-	SL 204 mm	-	8964.021
Obturator for nephroscope 20.8 FR	-	20.8 Fr		WL 230 mm	-	8964.121
Alternative:						
Sheath for nephroscope 24 FR	-	24 Fr	-	SL 204 mm	-	8965.041
Also: obturator for nephroscope 24 FR	-	24 Fr		WL 229 mm	-	8965.141
Amplatz sheath for nephroscope 24.3 FR		24.3 Fr	-	SL 150 mm	-	8964.041
Sealing element						15176.100


Option of optical percutaneous ureterotomy:		Product no.
Working element, urethrotome, passive 0°	Receptacle for stricture scalpels	8670.911
Telescope 0° Ø 4 mm WL 298 mm		8650.414
Scalpel 20.5 FR ceramic, lancet-shaped	12 o'clock cutting position, with ceramic cutter	8667.981

PERCUTANEOUS UNIVERSAL NEPHROSCOPES



#### PERCUTANEOUS UNIVERSAL NEPHROSCOPE

#### LONG VERSION FOR OBESE PATIENTS

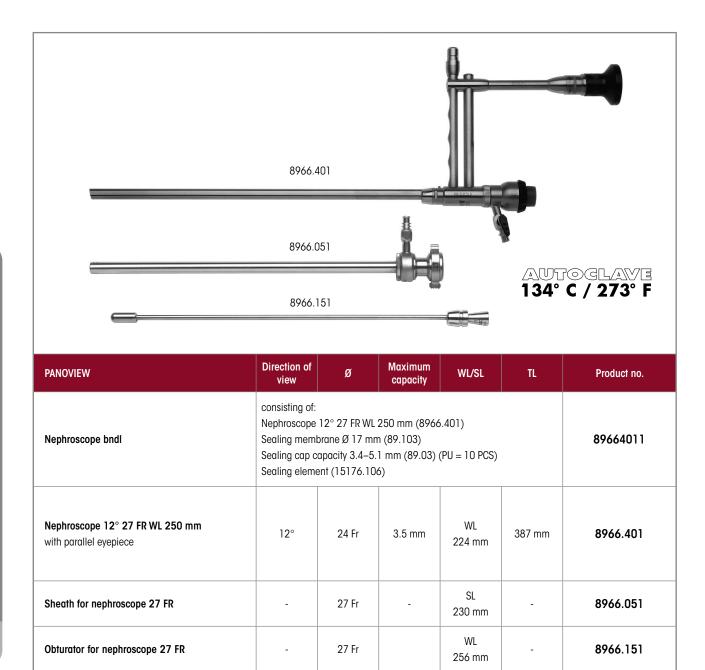

2 10

# **AUXILIARY INSTRUMENTS**

#### FOR PERCUTANEOUS UNIVERSAL NEPHROSCOPES

Grasping forceps jaw insert with s	sheath	Handle with overload protec- tion	Complete instrument  • Jaw section		
H <sub>y</sub> Safe				• Handle	
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Distal angled Pike-mouth jaws	8962.6028	9 Fr	355 mm	•	8962.6022
Grasping forceps bndl Pike-mouth jaws	8962.6108	10.5 Fr	350 mm	•	8962.6102

Grasping forceps			WL	TL	Product no.
	Rigid grasping forceps 10.5 FR WL 365 mm Three arms, detachable	10.5 Fr	365 mm	410 mm	8964.671

Further accessories			Product no.
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector and endoscope-side adapter (809509	' ' '	Ø 3.5 mm, 2.3 m long	806635231
Perforated basket for nephroscope with small part basket		Internal dimensions (W x H x D): 451 x 65 x 164 mm External dimensions (W x H x D): 467 x 75 x 172 mm	38011

PERCUTANEOUS UNIVERSAL NEPHROSCOPES



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

### RIGID AUXILIARY INSTRUMENTS

FORCEPS AND SCISSORS, SMALL MODULAR SYSTEM **H. Scree** 360° ROTATABLE, CAN BE FLUSHED THROUGH, EASY-CLICK


Grasping forceps jaw insert with s	sheath			Handle with overload protec- tion	Complete instrument  • Jaw section
H <sub>y</sub> Safe					• Handle
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Pike-mouth jaws	8962.6008	10.5 Fr	350 mm	•	8962.6002
	8962.6048	12 Fr	355 mm	•	8962.6042
Grasping forceps bndl Distal angled Pike-mouth jaws	8962.6028	9 Fr	355 mm	•	8962.6022
Grasping forceps bndl Pike-mouth jaws	8962.6108	10.5 Fr	350 mm	•	8962.6102
Grasping forceps bndl Peanut shape, fine toothing	8962.6078	12 Fr	340 mm	•	8962.6072
Grasping forceps bndl  Mouse tooth	8962.6058	12 Fr	340 mm	•	8962.6052
Grasping forceps bndl Pike-mouth jaws	8962.6808	6 Fr	425 mm	•	8968.6802

RICHARD

spirit of excellence

### FLEXIBLE FIBER NEPHROSCOPE 5 MM/15 FR

CHANNEL 2.5 MM/7.5 FR

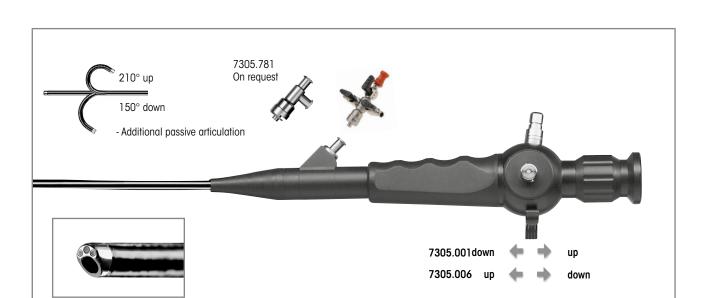

	Outer Ø	Working channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Fiber cystoscope 15 FR WL 400 mm Slanted distal tip	16 Cr	7 5 Er	400 mm	•		7305.001
Articulation +210°/-150° Direction of view 0°, angle of view 110°	13 FI	15 Fr 7.5 Fr	5 Fr   400 mm		•	7305.006
Fiber cystoscope bndl  consisting of: Fiber cystoscope 15 FR WL 400 mm (7305.001)  Adapter with 2 irrigation valves and 1 instrument port (7305.782)Leakage tester for flex. endoscopes (163.903)  Pressure equalization valve (163.904)  Cleaning brush Ø 3 mm,TL 1,200 mm (PU = 10 PCS) (7990002)				•		730500111
Fiber cystoscope bndl consisting of: Fiber cystoscope 15 FR WL 400 mm (7305.006) Adapter with 2 irrigation valves and 1 instrument port (7305.782) Leakage tester for flex. endoscopes (163.903) Pressure equalization valve (163.904) Cleaning brush Ø 3 mm, TL 1,200 mm (PU = 10 PCS) (7990002)				•	730500611	

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm, TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Perforated basket for flexible endoscopes	(W x H x D): 448 x 106 x 288 mm	33016
Also: fixing ring Ø 50.39 mm		643301261
Flexible auxiliary instruments		see section Auxiliary instruments

FLEXIBLE FIBER NEPHROSCOPE

2.11



# FLEXIBLE FIBER NEPHROSCOPE 5 MM/15 FR

#### TECHNICAL DATA

Fiber cystoscope 15 FR WL 400 mm	7305.001/7305.006
Distal tip	Slanted distal tip
Sheath diameter	15 Fr
Number of working channels	1
Working/irrigation channel diameter	7.5 Fr
Articulation	210° upward, 150° downward
Working length	400 mm
Angle of view	110°
Direction of view	0°

2. I I



# MEGA Pulse 70°

#### 70 W HOLMIUM: YAG LASER SYSTEM FOR STONE AND BPH THERAPY




	Product no.
MegaPulse 70+	
Laser surgical device tower EU bndl	
consisting of:	
MegaPulse 70⁺ laser surgical device tower 70 W (2286007)	
2x laser protection goggles (OBM003603)	
1x key set (2286525)	
1x door contact plug (2286520)	
2x blast shield with mounting (OAM001523)	22860070
1x filling bottle with tube (IAM000088)	
1x 2-pedal footswitch (2030232)	
1x fiber-stripping forceps for stripping laser fibers, 0.3 to 1.0 mm (2286523)	
1x fiber-stripping forceps for stripping laser fibers, 0.1 to 0.4 mm (2286527)	
1x ceramic cutter with silicone pad (AGM000080)	
1x accessories box for MegaPulse (KBM000103)	
1x power cable TL 3 m (2286230)	

IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.



MEGA Pulse 70⁺	22860070	
Device properties		
Display	12" touchscreen	
Power	70 watts	
Laser type	Holmium:YAG laser (Ho:YAG)	
Wavelength	2,100 nm (2.1 μm)	
Operating principle	Pulsed	
Energy	200–5,000 mJ	
Pulse duration	Adjustable (50–1,100 μs)	
Pilot beam	Green: 532 nm, < 5 mW, can be set to continuous or flashing	
Max. operating temperature	10–30 °C	
Storage temperature	Min. +5 °C, max. 40 °C	
Power supply		
Voltage	200–230 V, 50/60 Hz, < 32 A	
Frequency	3–60 Hz	
Dimensions and weights		
Dimensions (W x H x D)	595 x 1,200 x 1,074 mm	
Weight	200 kg	



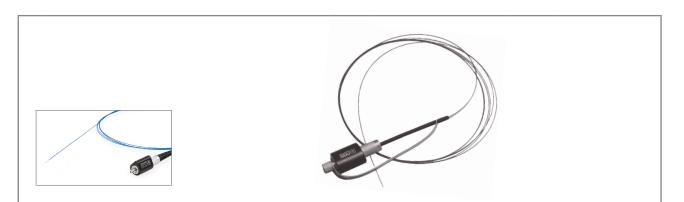

	Core diameter								
	Sterile (PU= 1 PC)		200 µm	272 µm	365 µm	550 µm	800 µm	1,000 μm	Product no.
	Power laser fiber Ø 200 µm, disposable	•							487502200
	Laser fiber Ø 200 µm, disposable		•						487501200
	Laser fiber Ø 272 µm, disposable			•					487501272
Single use	Laser fiber Ø 365 µm, disposable				•				4875013650
	Laser fiber Ø 550 µm, disposable					•			487501550
	Laser fiber Ø 800 µm, disposable						•		487501800
	Laser fiber Ø 1,000 µm, disposable							•	4875011000
	Power laser fiber Ø 200 µm, reusable	•							87502200
	Laser fiber Ø 200 µm, reusable		•						87501200
<b>.</b>	Laser fiber Ø 272 µm, reusable			•					87501272
Multiple use	Laser fiber Ø 365 µm, reusable				•				875013650
2	Laser fiber Ø 550 µm, reusable					•			87501550
	Laser fiber Ø 800 µm, reusable						•		87501800
	Laser fiber Ø 1,000 µm, reusable							•	875011000

"MEGA PULSE 70+" LASER




Accessories			Product no.
		Ø 200–272 μm	AGM000053
Fiber-stripping forceps,		Ø 365–400 μm	AGM000078
autoclavable	for stripping laser fibers	Ø 550-600 µm	AGM000052
		Ø 800 µm	AGM000064
Fib. a shine in a face of	for this is a love floor	Ø 0.1–0.4 mm	2286527
Fiber-stripping forceps	for stripping laser fibers	Ø 0.3–1.0 mm	2286523
Ceramic cutter with silicone pad			AGM000080
Filling bottle with tube		IAM000088	
Laser protection goggles	(Also suitable for glasses-wearers)	OBM003603	
2-pedal footswitch		2030232	
Key set			2286525
Door contact plug			2286520
Blast shield with mounting			OAM001523
Power cable TL 3 m			2286230
Accessories box for MegaPulse			KBM000103
Adapter cable	CEE coupling, 3-pin 32 A 6 h 230 V AC blue (on the device side) and CEE plug, 5-pin 32 A 6 h 400 V AC red (in-house)		

Machine reprocessing		Product no.
Perforated basket for laser fiber	Holds: Laser fiber, for machine reprocessing, sterilization (steam and low-temperature), storage, and transport; internal dimensions (W x H x D): 231 x 52 x 223 mm external dimensions (W x H x D): 248 x 72 x 239 mm	38001
Also: Fixing ring Ø 34.6 mm	for holding instruments during machine reprocessing, sterilization (steam and low-temperature), storage, and transport, $\emptyset$ 34.6 x 2.62 mm, PU = 5 PCS	643301262



# Pulvis 60°

60 W THULIUM FIBER LASER (TFL) FOR STONE THERAPY AND ENDOSCOPIC ENUCLEATION OF THE PROSTATE (EEP)

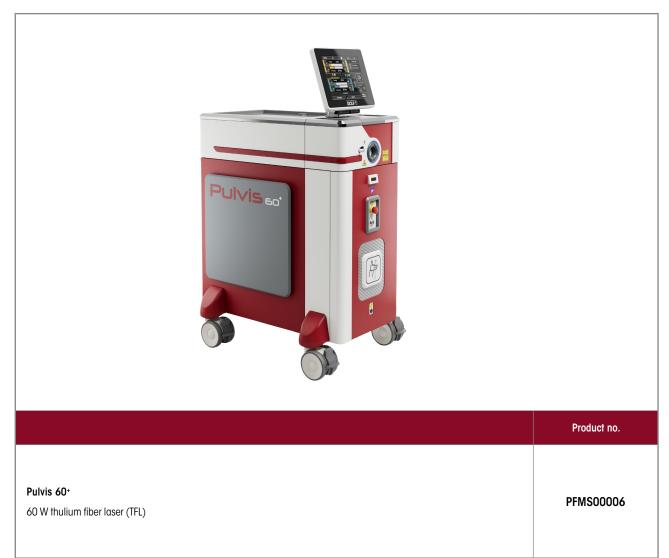

# PUVIS 60\* 60 W THULIUM FIBER LASER (TFL) TECHNICAL DATA

Pulvis 60⁺	PFMS00006
Device properties	
Display	Fold-out, rotatable touchscreen display (rotates 90° to the right and 180° to the left)
Operating temperature	15–30 °C (at a room temperature between 25 °C and 30 °C, operation is guaranteed with a maximum output power of up to 40 W)
Storage/transport temperature	Min. +5 °C/max. 40 °C
Atmospheric pressure	800–1,060 hPa
Operating humidity	30–85 %, non-condensing
Max. noise level	< 70.0 dB
Equipment	
Cooling method	Air cooling system
Power supply	
Mains + frequency	100-240 V AC, 50/60 Hz
Power consumption	1,000 VA
Regulatory standards	
Classification according to the Medical Devices Directive 93/42/EEC	Class IIb
Laser classification according to IEC/EN 60825-1:2014	Class 4
Pilot beam classification according with IEC/EN 60825-1:2014	Class 3R
Dimensions and weights	
Weight	100 kg
Dimensions (W x H x D)	470 x 1,156 x 810 mm 470 x 940 x 810 mm – display closed



# PUVIS 60\* 60 W THULIUM FIBER LASER (TFL) TECHNICAL DATA

Pulvis 60⁺	PFMS00006
Laser source specifications	
Laser type	Thulium fiber-laser
Wavelength	1,940 nm ± 20 nm
Maximum output power	60 W (pulsed/CW)
Pulse energy	0.02-6 J
Operating mode	Pulsed/CW
Pulse duration	50 μs – CW
Frequency of recurrence	1–2,500 Hz
Delivery system	Large selection of laser fibers (see next page) (sterile, disposable, and reusable)
Pilot beam	Green 532 nm (adjustable) < 5 mW, class 3R
Goggles	1940 D LB4

| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# PUIVIS 60<sup>†</sup> LASER FIBERS



		Core diameter										
	Sterile (PU= 10 PCS)	150 µm	200 µm	272 μm	365 µm	500 μm	550 µm	600 µm	800 µm	1,000 µm	Product no.	
	Single use optical fiber 150 µm	•									OFJ001511	
	Single use optical fiber 200 µm		•								OFJ002011	
	Single use optical fiber 272 µm			•							OFJ702711	
_	Single use optical fiber ball tip 272 µm			•							OFJ302711	
single use	Single use optical fiber 365 µm				•						OFJ703611	
n	Single use optical fiber 550 µm						•				OFJ005511	
	Single use optical fiber lateral 600 µm							•			OFJ506011	
	Single use optical fiber 800 µm								•		OFJ008011	
	Single use optical fiber 1,000 µm									•	OFJ009911	
	Reusable 10x optical fiber 200 µm		•								OFJ002013	
	Reusable 10x optical fiber 272 µm			•							0FJ702713	
Multiple use	Reusable 10x optical fiber 365 µm				•						OFJ703613	
Mulip	Reusable 10x optical fiber 500 µm					•					OFJ005513	
	Reusable 10x optical fiber 800 µm								•		OFJ008013	
	Reusable 10x optical fiber 1,000 µm									•	OFJ009913	



# Pulvis 60°

#### **ACCESSORIES**

Accessories	Product no.
Interlock Conn. Medical Devices Binder	EAM000045.00
Кеу	MBQ000190.00
Power cord-5m-spina Shuko 16A EUR	EAM001440.00
Fiberstripper optical fibers Ø300-1000 μm	OBM001079.00
Fiberstripper optical fibers Ø100-400 µm	OBM001080.00
Case salsa 1650 no brand accessories	KBM000103.01
Ceramic fiber cutter with slipcase	AGM000080.00
Goggle protection f18.P1d09.1003	OBM003778.00
Optical blast shield for tfl ext-access	OAM002112.00

Machine reprocessing		Product no.
Perforated basket for laser fiber	Holds: Laser fiber, for machine reprocessing, sterilization (steam and low-temperature), storage, and transport; internal dimensions (W x H x D): 231 x 52 x 223 mm external dimensions (W x H x D): 248 x 72 x 239 mm	38001
Also: Fixing ring Ø 34.6 mm	for holding instruments during machine reprocessing, sterilization (steam and low-temperature), storage, and transport, $\emptyset$ 34.6 x 2.62 mm, PU = 5 PCS	643301262




| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

### **FLUID CONTROL 2225**

#### SUCTION IRRIGATION PUMP

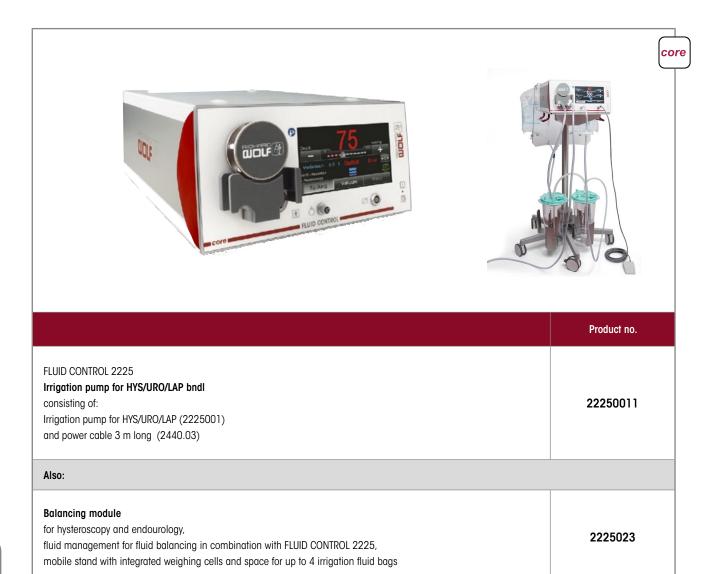

#### Mini PCNL or standard PCNL

- Pressure and flow-controlled indication Simultaneous monitoring of nominal pressure and irrigation flow
- Integrated vacuum function Rapid fluid replacement for optimum viewing conditions

Accessories		Product no.
Footswitch	Only for use in urology and within the indication TUR/enucleation, possibility of short-term increase in pressure if visibility is poor (Flush function)	2204901



# FLUID CONTROL 2225

#### SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with LUER-LOCK connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
	Irrigation tube set with piercing spike, L 3 m	(PU = 10 PCS), with LUER-LOCK connection, sterile, disposable product	4171223
Accessories – disposable	Tube set with CARE-LOCK, L 3 m	(PU = 10 PCS), sterile, disposable product	4171224
	Suction irrigation tube set	(PU = 10 PCS), with piercing spike, sterile, disposable product, PVC	4171225
	Day irrigation tube set	(PU = 10 PCS), sterile, disposable product, PVC	4171226
	Patient irrigation tube set, sterile	(PU = 10 PCS), with LUER-LOCK connection, sterile, disposable product, PVC	4171227
	Note: Day tube and patient tube can only be us the day tube can be used for up to 20 patients.	ed together. A new patient tube is required for each patient –	

Suction			Product no.
	Tube set for vacuum, incl. filter	with integrated hygiene filter, PU = 10 PCS, service life 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with LUER-LOCK, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
Accessories – reusable	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container 2 I	2 liters, with lid	8170.655
	Secretion container 2 I	2 liters, no lid	8170.6551
	Secretion container 2.5 I	2.5 liters	41706566
Accessories – disposable	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PU = 90 PCS) (41706564)	4170657
	Tube set for suction (2 connections)	Sterile, disposable product (PU = 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PU = 10 PCS) for connecting vacuum tube 2206207 to disposable container systems	0771019



# FLUID CONTROL 2225

### CABLE ACCESSORIES

		Product no.
Patch cable, RJ45 SFTP, 0.5 m	Cable length 0.5 m	72325378
Patch cable, RJ45 HRS TM11, 1.0 m	Cable length 1.0 m	72325429
Patch cable, RJ45 S/FTP CAT.6 10 m	Cable length 10 m	72325434
Plastic caps for network socket	(PU = 8 PCS)	5592105
Power cable	Cable length 3 m	2440.03

# TECHNICAL DATA FLUID CONTROL 2225

FLUID CONTROL 2225		2225001		
Device properties				
Operating conditions		+10 °C to +40 °C, 30 % to 75 % rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level		
Storage and transport condi	tions	-20 °C to +60 °C, 10 % to 90 % rel. humidity, 70 to 106 kPa atmospheric pressure		
Power supply				
Mains + frequency		100–240 V AC, 50/60 Hz		
D !'	100 V/60 Hz	110 VA		
Power consumption	240 V/50 Hz	120 VA		
Ourment consumption	100 V/60 Hz	1.10 A		
Current consumption	240 V/50 Hz	0.50 A		
Fuse		T 3.15 AH, 250 V		
Regulatory standards				
Protection class (I, II)		ı		
Electromagnetic compatibility (EMC)		EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2		
Medical Devices Directive 93/42/EEC		Class IIb		
Housing protection rating (IF	code)	IP 21		
Protection against electric s	hock	Type BF applied part		
Degree of protection in the pmixtures	oresence of flammable	Device is not protected against explosions (do not operate this device in explosive atmospheres)		
Maximum suction vacuum		-60 kPa		
Dimensions and weights				
Weight		8.8 kg		
Dimensions (W x H x D)		300 mm x 157 mm x 436 mm		

Relevant application parameters			
	Hysteroscopy: 800 ml/min (max. flow, not adjustable)		
Nominal flow range	Endourology: 10–800 ml/min (max. flow)		
	Laparoscopy: 0.1–1.8 l/min (max. flow)		
Suction power	Max. 2 I/min		
	Hysteroscopy: 15–200 mmHg		
Starting nominal pressure range	Endourology: 15–90 mmHg/20–120 cmH2O		
	Laparoscopy: 300 mmHg (not adjustable)		
Pressure	0–300 mmHg		
Deficit	-9,990 to +9,990 ml/0 to 99.9 l		



# TECHNICAL DATA FLUID CONTROL 2225

Balancing module 2225023				
Device properties				
Operating conditions	$+10~^{\circ}\text{C}$ to $+40~^{\circ}\text{C}$ , $30~^{\circ}\text{K}$ to $75~^{\circ}\text{K}$ rel. humidity, $70~\text{to}~106~\text{kPa}$ atmospheric pressure 3,000 m max. altitude above sea level			
Storage and transport conditions	-20 °C to +60 °C, 10 % to 90 % rel. humidity, 70 to 106 kPa atmospheric pressure			
Regulatory standards				
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2			
Housing protection rating (IP code)	IP 21			
Maximum load of container scale	16 kg/4 containers of 3 I each			
Maximum load of bag scale	23 kg/4 bags of 5 I each			
Dimensions and weights				
Weight	15.4 kg			
Dimensions (W x H x D)	618 mm x 1,064 mm x 618 mm			

Footswitch	2204901
Power supply	
Power supply connection	Max. 24 V
Power consumption	Max. 0.1 A
Regulatory standards	
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1
Housing protection rating (IP code)	IP X8
Plug	7-pin circular connector
Cable length	4.5 m
Dimensions and weights	
Weight	300 g
Dimensions (W x H x D)	66 mm x 27 mm x 91 mm

| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

**URO166** 





PEDIATRIC UROLOGY



# **PEDIATRIC UROLOGY**

OPTICAL (	RETHROTOME FOR NEWBORNS AND INFANTS	
CYSTO-UR	THROSCOPE 8686 FOR NEWBORNS AND INFANTS	
CYSTO-UR	THROSCOPE 8672 FOR INFANTS	
MIDI-SIZE	CYSTO-URETHROSCOPE FOR SMALL ANATOMIES	
CYSTOSC	PE 4.5/6.5 FR FOR NEWBORNS AND INFANTS	
CYSTOSC	PE 8/9.8 FR FOR REFLUX THERAPY IN INFANTS	
RESECTOS	COPES FOR NEWBORNS AND INFANTS	
MIDI-SIZE	RESECTOSCOPE	
ULTRA-TH	I FIBER URETERORENOSCOPE	

X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with


your contact partner or directly with Richard Wolf GmbH

# WOLF

spirit of excellence

#### OPTICAL URETHROTOME

#### FOR TELESCOPE 1.9 MM FOR NEWBORNS AND INFANTS

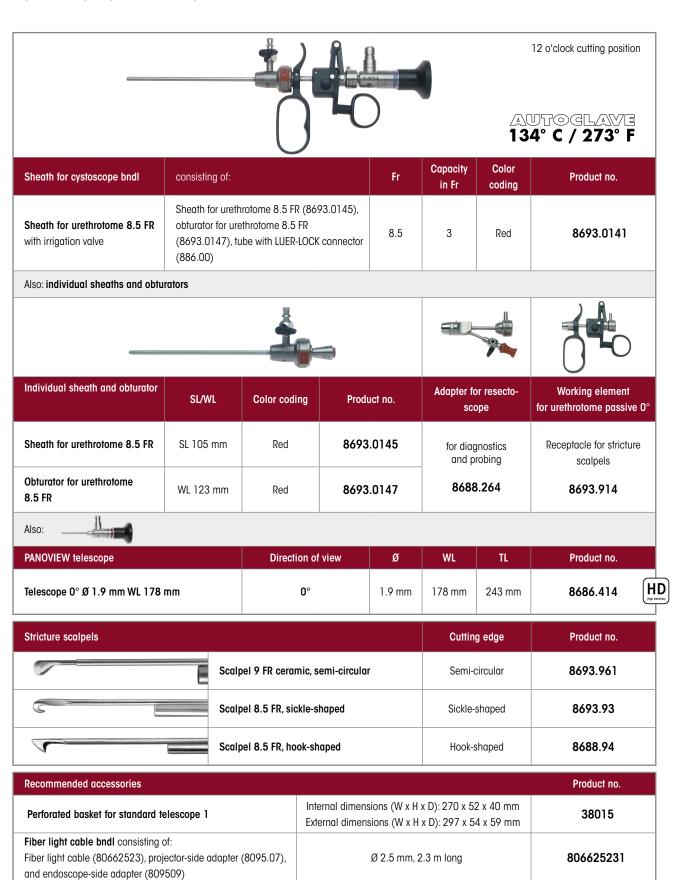




|X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

contact partner or directly with Richard Wolf GmbH

#### CYSTO-URETHROSCOPE 8686

#### FOR TELESCOPE 1.9 MM FOR NEWBORNS AND INFANTS

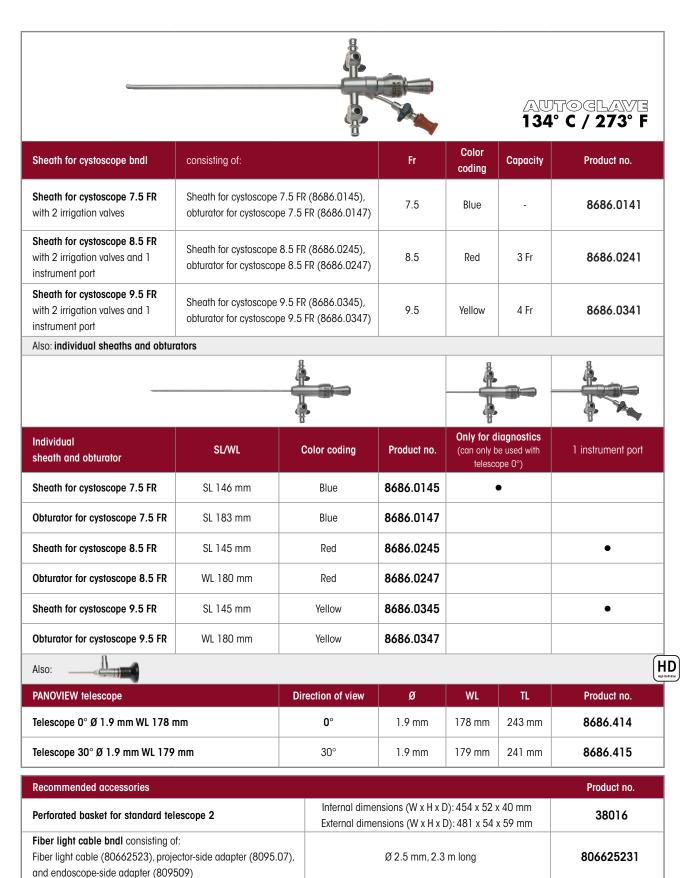

X23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.




#### spirit of excellence

### CYSTO-URETHROSCOPE 8672

FOR TELESCOPE 2.7 MM FOR INFANTS

Telescope 70° Ø 2.7 mm WL 185 mm

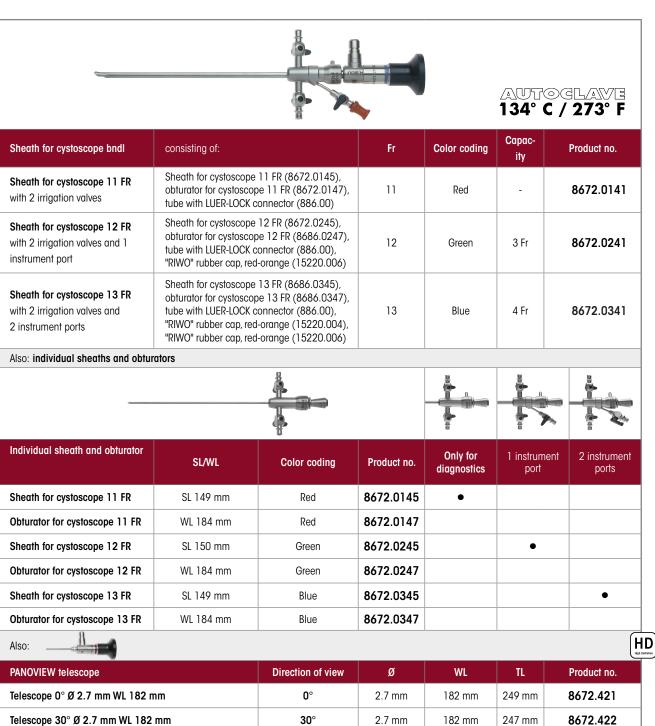

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

70°

2.7 mm

185 mm

247 mm


8672.425



# WOLF

# CYSTO-URETHROSCOPE 8672

# FOR TELESCOPE 2.7 MM FOR INFANTS

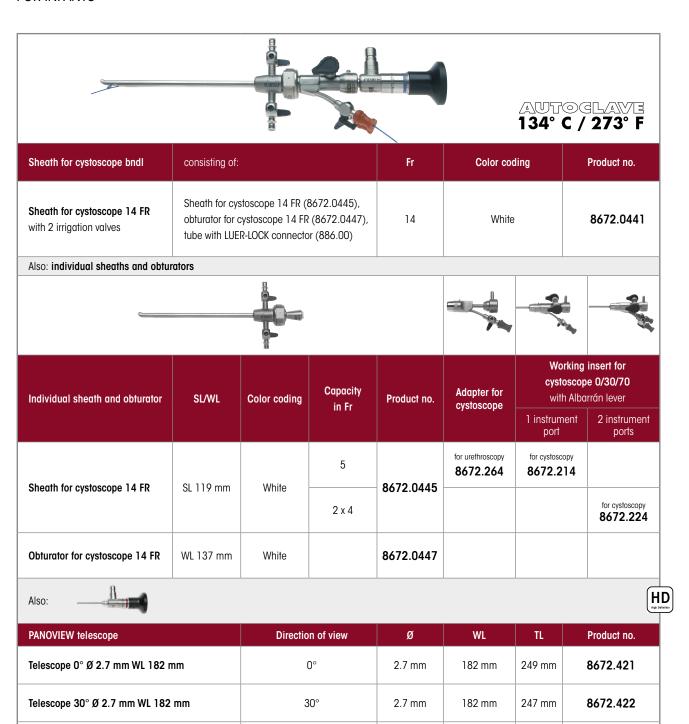

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

2.7 mm

185 mm

247 mm

8672.425

70°

Telescope 70° Ø 2.7 mm WL 185 mm


Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

# **OPTICAL FORCEPS**

#### FOR CYSTO-URETHROSCOPE 8672



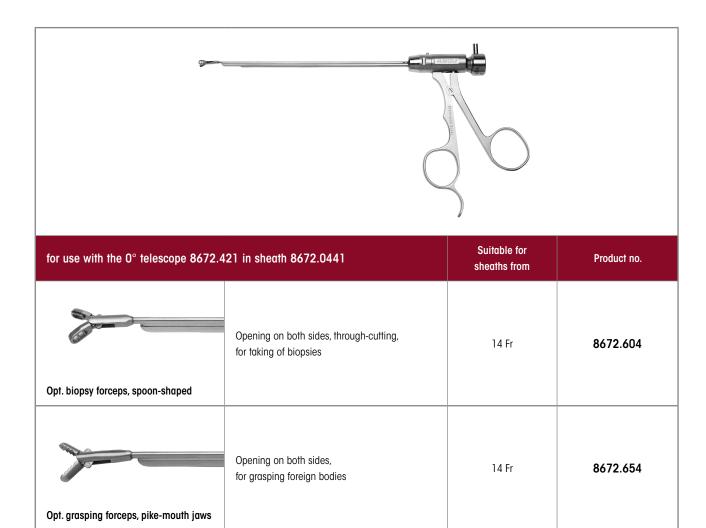



# FORCEPS AND SCISSORS

# 

FOR CYSTO-URETHROSCOPE 8672

Grasping forceps jaw insert with sheath				Handle with overload protec- tion	Complete instrument  • Jaw section  • Handle
	1				• Hanale
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Distal angled with pike-mouth jaws	8642.6508	5	340 mm	•	8642.6502
	8645.6508	7	325 mm	•	8645.6502
Grasping forceps bndl - Spoon	8642.6008	5	340 mm	•	8642.6002
	8645.6008	7	340 mm	•	8645.6002
Biopsy forceps bndl	8642.6318	5	340 mm	•	8642.6312
Scissors bndl	8642.6818	5	340 mm	•	8642.6812
Hook scissors bndl Through-cutting	8992.6408	7	310 mm	•	8992.6402


- Can be flushed through optimum internal cleaning
- Easy-Click quick and simple assembly
- Overload protection significantly longer service life



# FLEXIBLE GRASPING FORCEPS

IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### FOR CYSTO-URETHROSCOPES 8672 AND 8686

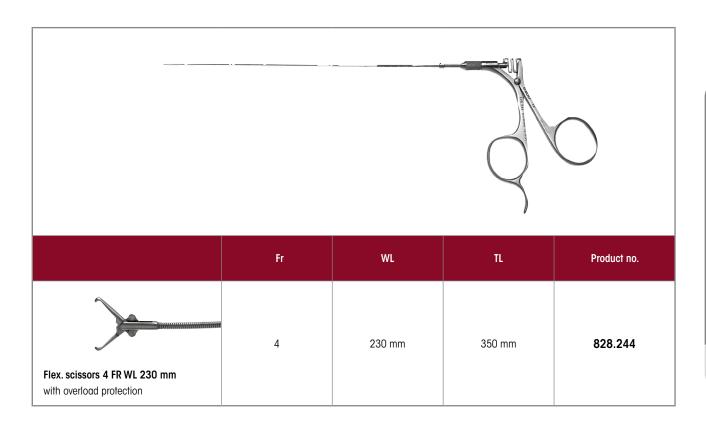




| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH

#### **MIDI-SIZE**

#### CYSTO-URETHROSCOPE

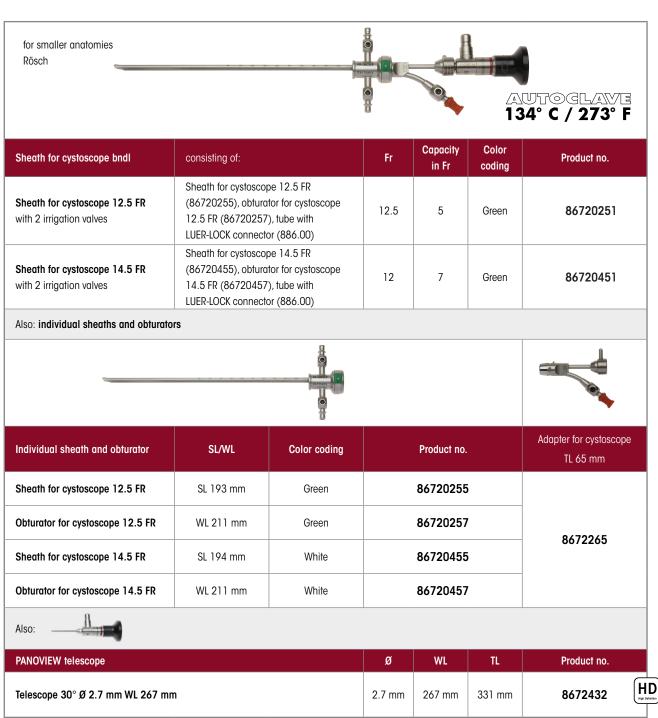

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
HF connection cable		see URO103/104



# FLEXIBLE AUXILIARY INSTRUMENTS FOR MIDI-SIZE

		Outer Ø	WL	TL	Product no.
	Flex. biopsy forceps 5 FR WL 315 mm	5 Fr	315 mm	465 mm	829.05
51	Flex. biopsy forceps 7 FR WL 375 mm	7 Fr	375 mm	490 mm	829.07
	Flex. grasping forceps 5 FR WL 315 mm	5 Fr	315 mm	465 mm	828.05
	Flex. grasping forceps 7 FR WL 365 mm	7 Fr	365 mm	515 mm	828.07
	Flex. scissors 7 FR WL 375 mm	7 Fr	375 mm	490 mm	830.07

MIDI-SIZE CYSTO-URETHROSCOPE

# 

spirit of excellence

| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# CYSTOSCOPE 4.5/6.5 FR

#### FOR NEWBORNS AND INFANTS



		Direction of view	Working chan- nel	WL	Product no.
Cystoscope bndl consisting of: Cystoscope 5° 4.5/6.5 FR W seal Ø 7.5 mm (PU = 10 PC) membrane holder (15256.3' "RIWO" rubber cap, red-orang	S) (89.101), 93), and	5°	3.3 Fr	120 mm	87154012
Also:					
<b>\</b>	Flex. grasping forceps 3 FR WL 230 mm Fine toothing		230 mm	828.03	
	Flex. biopsy forceps 3 FR WL 23	0 mm		230 mm	829.03
	for inserting auxiliary instruments universal sealing valve 1–6 FR,				4712348

Recommended accessories		Product no.
Perforated basket for cystoscope/telescope	Internal dimensions (W x H x D): 451 x 65 x 124 mm External dimensions (W x H x D): 467 x 75 x 132 mm	38004
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (809509)	5.07), Ø 2.5 mm, 2.3 m long	806625231



# CYSTOSCOPE 8/9.8 FR

#### FOR REFLUX THERAPY IN INFANTS



		Direction of view	Working chan- nel	WL	Product no.
Cystoscope 12° 8.0/9.8 FR	WL 150 mm	12°	5 Fr	150 mm	8626.531
Also:					
<b>—</b>	Rigid grasping forceps 5 FR WL 340 mm Fine toothing, for splint removal		340 mm	8626.65	
	Coag. electrode mono 5 FR WL	e mono 5 FR WL 400 mm			823.05
	for inserting auxiliary instruments universal sealing valve 1–6 FR,				4712348

Recommended accessories		Product no.
Perforated basket for cystoscope/telescope	Internal dimensions (W x H x D): 451 x 65 x 124 mm External dimensions (W x H x D): 467 x 75 x 132 mm	38004
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07) and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



# WOLF


#### spirit of excellence

| Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

### **RESECTOSCOPE**

FOR TELESCOPE 1.9 MM FOR NEWBORNS AND INFANTS

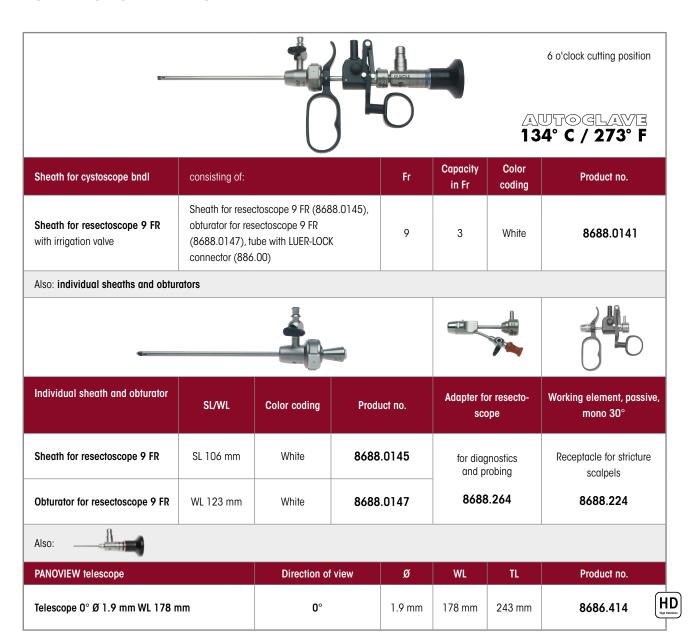


Recommended accessories	Product no.	
Perforated basket for standard telescope 1	Internal dimensions (W x H x D): 270 x 52 x 40 mm External dimensions (W x H x D): 297 x 54 x 59 mm	38015
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Electrodes and scalpels		see URO182
HF connection cable		see URO103/104

#### **RESECTOSCOPE**

### FOR TELESCOPE 2.7 MM FOR NEWBORNS AND INFANTS

Telescope  $0^{\circ}$  Ø 2.7 mm WL 182 mm

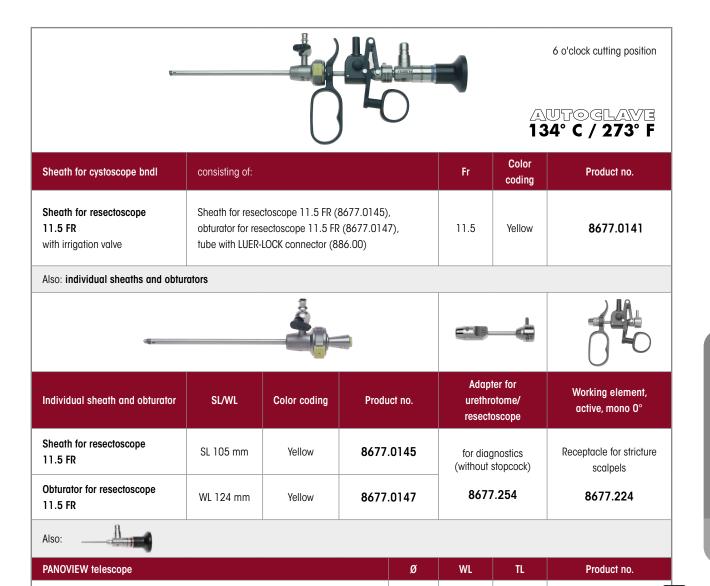

Recommended accessories		Product no.
Perforated basket for standard telescope 1	Internal dimensions (W x H x D): 270 x 52 x 40 mm External dimensions (W x H x D): 297 x 54 x 59 mm	38015
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Electrodes and scalpels		see URO182
HF connection cable		see URO103/104

2.7 mm

182 mm

249 mm

HD

8672.421



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### **ELECTRODES AND SCALPELS**

#### FOR RESECTOSCOPE WITH TELESCOPE 1.9 MM AND 2.7 MM

Electrodes			for resectoscope	with telescope
		Loop	1.9 mm	2.7 mm
	Cutting electrode mono 9 FR 0°	- Round	8688.93	
V	Cutting electrode mono 11.5 FR 0°	Round		8416.03
	Coag. electrode mono 9 FR 0°	- Ball	8688.91	
	Coag. electrode mono 11.5 FR 0°	Duli		8416.01
	Hook electrode mono 9 FR 0°		8688.95	
All and the second	Hook electrode mono 11.5 FR 0°	Hook		8416.09
	Coag. electrode mono 9 FR 0° 90° angled retrograde	Ball	8688.994	

Scalpel, for cold cutting of urethral strictures				e with telescope
		Cutting edge	1.9 mm	2.7 mm
	Scalpel 9 FR ceramic, semi-circular	Comi oiroular	8693.961	
	Scalpel 11.5 FR ceramic, semi-circular	Semi-circular		8677.961
	Scalpel 8.5 FR, sickle-shaped	0:11	8693.93	
	Scalpel 11.5 FR, sickle-shaped	Sickle-shaped		8677.93
	Scalpel 8.5 FR, hook-shaped	Hook-shaped	8688.94	

3.8


MIDI-SIZE RESECTOSCOPE



spirit of excellence

#### **MIDI-SIZE**

#### **RESECTOSCOPE**

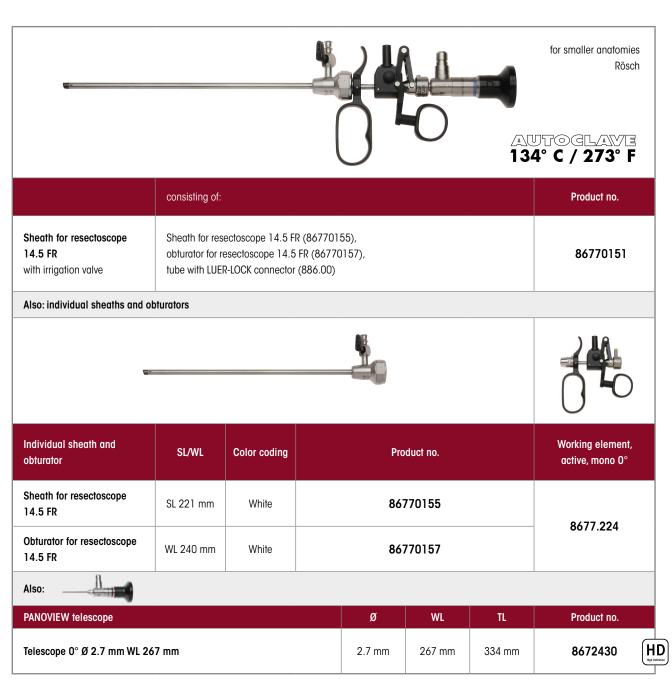

Recommended accessories		Product no.
Perforated basket for standard telescope 2	Internal dimensions (W x H x D): 454 x 52 x 40 mm External dimensions (W x H x D): 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231
Container (W x H x D) 300 x 60 x 200 mm		33020
Monopolar connection cable	'	see URO103/104



| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### **MIDI-SIZE**


#### AUXILIARY INSTRUMENTS FOR THE MIDI-SIZE RESECTOSCOPE

Stricture scalpels with ceramic cutter	Cutting surface	Product no.	
	Scalpel 14.5 FR, lancet-shaped	Lancet-shaped, cuts on both sides	8677981
	Scalpel 14.5 FR, sickle-shaped	Sickle-shaped	8677931

Electrodes		Electrode shape	Product no.
8	Coag. electrode mono 14.5 FR 0° Stem color yellow	Button	8416011
0	Cutting electrode mono 14.5 FR 0° Stem color yellow	Round loop	8416031
	Hook electrode mono 14.5 FR 0° Stem color yellow	Hook	8416091

#### **ULTRA-THIN FIBER URETERORENOSCOPE**

WITH LATERAL EYEPIECE

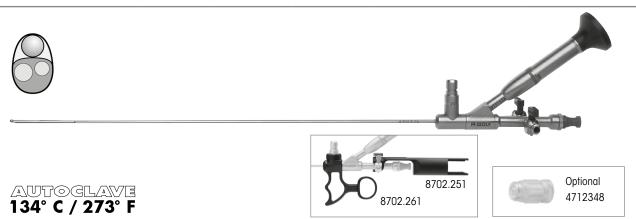


134° C / 2	75 1						
		WL	TL	Direction of view	Fr	Working channel	Product no.
Jreterorenoscope 5° 4.5/6.5 FR WL 430 m Atraumatically shaped	nm	430 mm	555 mm	5°	4.5/6.5 Fr	3 Fr	8701.534
Recommended acces	ssories						Product no.
	Flex. gr	asping forceps 3 F	R WL 530 mm				828.605
<b>&gt;</b>	Flex. bio	opsy forceps 3 FR	WL 530 mm				829.603
	Laser fi	ber Ø 200 µm, di	sposable				487501200
	Laser fi	ber Ø 272 µm, dis	sposable				487501272
	Laser fiber Ø 200 μm, reusable						87501200
	Laser fi	ber Ø 272 µm, reu	ısable				87501272
Handle for E-Line ure	eterorenoso	copes					8702.261
Guide element for ur	eterorenos	cope for LITHOCLA	ST handpieces				8702.251
for inserting auxiliary i	instruments	s of 1–6 FR: <b>unive</b>	rsal sealing val	ve 1–6 FR, sterile (PU	= 5 PCS)		4712348
Membrane holder sto	andard						15256.393
Membrane holder wit	th Luer						15256.456
<b>Seal Ø 7.5 mm</b> (PU =	= 10 pcs)						89.101
LithoClast probe Ø 0.	.8 mm WL	605 mm					8742.001
Perforated basket, up with small part basket	-	y tract 1			ns (W x H x D): 619 ns (W x H x D): 635		38003
Marking pen, black							38201.948
Fiber light cable bndl Fiber light cable (806 and endoscope-side c	62523), pro	, ojector-side adapte	er (8095.07),	Ø	2.5 mm, 2.3 m long	1	806625231
Auxiliary instruments	<b>;</b>						see URO197

FIBER URETERORENOSCOPE





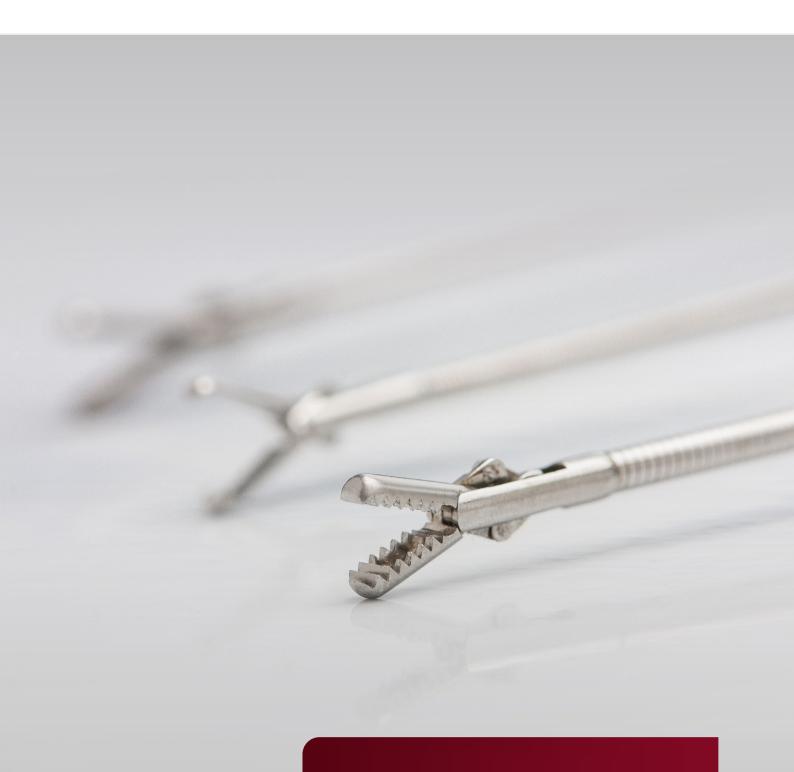

**AUXILIARY INSTRUMENTS** 




#### **AUXILIARY INSTRUMENTS**

BLADDER SYRINGES	
SEALING CAPS	
LUER-LOCK PARTS / ST	DPCOCKS AND IRRIGATION ADAPTERS /
	TER / LASER ADJUSTMENT UNIT
FORCEPS AND SCISSO	RS, RIGID
FORCEPS AND SCISSO	RS, FLEXIBLE
ELECTRODES	

### WOLF

spirit of excellence

#### **BLADDER SYRINGES**

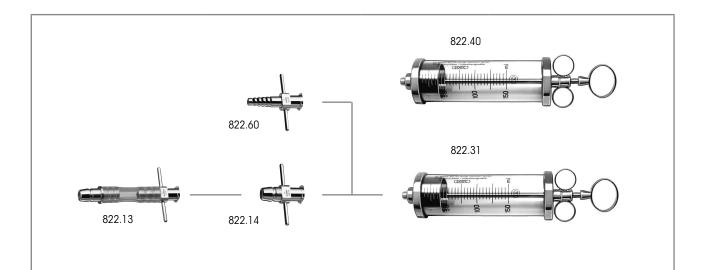

		Ø	ml	L/TL	Product no.
Bladder syringe 150 ml Ø 54 mm	for flexible and rigid adapters	54 mm	150 ml	L 248 mm	822.31
Flexible adapter for bladder syringe	Compatible with bladder syringe 822.31			TL 106 mm	822.13
Rigid adapter for bladder syringe	Compatible with instruments with cone B and bladder syringe 822.31			TL 37 mm	822.14
Bladder syringe 150 ml Ø 54 mm		54 mm	150 ml	L 248 mm	822.40
Rigid adapter for bladder syringe	Compatible with bladder syringe 822.40			TL 50 mm	822.60
for bladder syringe 150 ml (822.31 and 822.40)				· 	
Spare cylinder 150 ml			150 ml		82295

| IX23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product, for more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### **SEALING CAPS**

Figure		Capacity Ø	Color	Product no.
Sealing cap	Sealing cap without hole	-	Red-orange	89.20
Small, PU = 10 PCS	Sealing cap capacity < 2.4 mm	< 2.4	Black	89.00
15 mm	Sealing cap capacity 2.4–3.4 mm	2.4-3.4	Red	89.01
	Sealing cap capacity 3.4–5.1 mm	3.4-5.1	Blue	89.02
0 /	Sealing cap capacity 5.1–6.0 mm	5.1-6.0	Gray	89.03
	Sealing cap capacity 6.0–7.0 mm	6.0–7.0	Brown	89.04
	Sealing cap capacity 6.0–7.0 mm	7.0–8.0	Yellow	89.05
	Sealing cap capacity 9.5–10.1 mm	9.5–10.1	Red	89.08
17 mm	Sealing cap capacity > 10.1 mm	> 10.1	Blue	89.09
	Sealing cap capacity 13.0–13.8 mm	13.0–13.8	Red	89.10
	Sealing cap capacity 4–6 mm	4.0-6.0	Red	89.141
	Sealing cap capacity 7.5–8.5 mm	7.5–8.5	Blue	89.161
	Sealing cap capacity 7.0 mm	7.0	Brown	89.171
Sealing cap with cross-shaped slot	for trocar sleeve with threaded sheath, PU = 10 PCS	-	Red-orange	89.90
RIWO rubber cap	RIWO rubber cap without hole	-	Red-orange	88.00
PU = 10 PCS	RIWO rubber cap capacity 0.5 mm	0.5	Red	88.005
	RIWO rubber cap capacity 0.8 mm	0.8	Red-orange	88.01
ø	RIWO rubber cap capacity 1.4 mm	1.4	Blue	88.02
	RIWO rubber cap capacity 2.4 mm	2.4	Black	88.03
	RIWO rubber cap capacity 4.0 mm	4.0	Green	88.04
	Rubber cap for hysteroscope Extended, PU = 1 PC	-	Red-orange	18.01



#### LUER-LOCK PARTS / STOPCOCKS AND IRRIGATION ADAPTERS / SEALING VALVE / ADAPTER/LASER ADJUSTMENT UNIT

		Hole		Product no.			
4-1	Tube with LUER-LOCK connector	Ø3 mm	Male	886.00			
<b>V</b>	Tube with LUER-LOCK connector Ø 4 mm Length 29.5 mm	Ø 4 mm	Male	886.01			
	Tube with LUER-LOCK connector Ø 3 mm Length 28 mm	Ø 3 mm	Female	891.00			
	Tube with LUER-LOCK connector, 891.011	Ø 4 mm	Female	15023.041			
	Stopcock LUER-LOCK connection Ø 3 mm	Ø 3 mm	Male	884.00			
	Stopcock LUER-LOCK connection Ø 4 mm	Ø 4 mm	Male	884.01			
	Two-way stopcock, maintenance-free with LUER-LOCK connection	Ø 3 mm	Male	88350			
	Two-way stopcock, maintenance-free with LUER-LOCK connection	Ø 4 mm	Female	88351			
	Adapter with 2 Luer connections, male, quick-release	Adapter with 2 Luer connections, male, quick-release mechanism, TL 36 mm					
	Adapter with 2 irrigation valves and 1 instrument p	ort, quick-release mect	nanism	7305.782			
	Also: Luer sealing cap			15023205			
	Universal sealing valve 1–6 FR for inserting auxiliary instruments of 1–6 Fr	4712348					
	Adapter for machine leakage tests	163.905					
	Laser adjustment unit bndl	15369108					
	Also: clamping element, orange (20 pcs)			15394144			



#### RIGID FORCEPS AND SCISSORS

### SMALL MODULAR SYSTEM **HySafe**

RECOMMENDED FOR CYSTOSCOPY

Grasping forceps jaw insert with	ı sheath	Handle with overload protec- tion	Complete instrument  • Jaw section  • Handle		
					• nullule
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Distal angled with pike-mouth jaws	8642.6508	5	340 mm	•	8642.6502
	8645.6508	7	325 mm	•	8645.6502
Grasping forceps bndl - Spoon	8642.6008	5	340 mm	•	8642.6002
	8645.6008	7	340 mm	•	8645.6002
Biopsy forceps bndl	8642.6318	5	340 mm	•	8642.6312
Scissors bndl	8642.6818	5	340 mm	•	8642.6812
Hook scissors bndl Through-cutting	8992.6408	7	310 mm	•	8992.6402

#### RIGID FORCEPS AND SCISSORS

### SMALL MODULAR SYSTEM **HySafe**RECOMMENDED FOR URETERORENOSCOPY

Grasping forceps jaw insert with	ı sheath			Handle with overload protection	Complete instrument  • Jaw section
		-			• Handle
	Product no.	Fr	WL	8083.001	Product no.
Biopsy forceps bndl	8952.6008	5	550 mm	•	8952.6002
Grasping forceps bndl with mouse tooth	8952.6118	4	550 mm	•	8952.6112
	8959.6218	5	425 mm	•	8959.6212
	8952.6218	5	550 mm	•	8952.6212
Grasping forceps bndl	8959.6808	5	425 mm	•	8959.6802
With the same of t	8954.6808	5	550 mm	•	8954.6802
Grasping forceps bndl with pike-mouth jaws, short	8952.6508	5	550 mm	•	8952.6502



#### RIGID FORCEPS AND SCISSORS

### SMALL MODULAR SYSTEM HySafe

RECOMMENDED FOR NEPHROSCOPY

Grasping forceps jaw insert with s	sheath			Handle with overload protection	Complete instrument  • Jaw section
H <sub>y</sub> Safe			ja-		• Handle
	Product no.	Fr	WL	8083.001	Product no.
Grasping forceps bndl Pike-mouth jaws	8962.6008	10.5 Fr	350 mm	•	8962.6002
	8962.6048	12 Fr	355 mm	•	8962.6042
Grasping forceps bndl Distal angled Pike-mouth jaws	8962.6028	9 Fr	355 mm	•	8962.6022
Grasping forceps bndl Pike-mouth jaws	8962.6108	10.5 Fr	350 mm	•	8962.6102
Grasping forceps bndl Peanut shape, fine toothing	8962.6078	12 Fr	340 mm	•	8962.6072
Grasping forceps bndl Mouse tooth	8962.6058	12 Fr	340 mm	•	8962.6052
Grasping forceps bndl Pike-mouth jaws	8962.6808	6 Fr	425 mm	•	8968.6802

#### RIGID FORCEPS AND SCISSORS

#### RECOMMENDED FOR NEPHROSCOPY

		Area of application	Fr	WL	Product no.
Fine toothing	Rigid grasping forceps 5 FR WL 340 mm	Surgical urethro- cystoscopy for infants	5	340 mm	8626.65
Serrated	Biopsy forceps WL 270 mm	Intrarenal stone surgery	8	270 mm	8280.22
	Biopsy forceps WL 270 mm	Intrarenal stone surgery	6	270 mm	8280.23
	Scissors WL 230 mm	Intrarenal stone surgery	8	230 mm	8283.21

#### FLEXIBLE FORCEPS AND SCISSORS

#### RECOMMENDED FOR CYSTOSCOPY

		Fr	WL	TL	Product no.
	Flex. grasping forceps 3 FR WL 230 mm	3	230 mm	380 mm	828.03
<b>V</b>	Flex. grasping forceps 5 FR WL 315 mm	5	315 mm	465 mm	828.05
<b>3</b> 0	Flex. grasping forceps 7 FR WL 365 mm	7	365 mm	515 mm	828.07
	Flex. grasping forceps 10 FR WL 325 mm	10	325 mm	475 mm	828.10
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	720 mm	828.051
	Flex. biopsy forceps 3 FR WL 230 mm	3	230 mm	380 mm	829.03
	Flex. biopsy forceps 5 FR WL 315 mm	5	315 mm	465 mm	829.05
	Flex. biopsy forceps 7 FR WL 375 mm	7	375 mm	490 mm	829.07
	Flex. biopsy forceps 10 FR WL 325 mm	10	325 mm	475 mm	829.10
	Flex. biopsy forceps 5 FR WL 550 mm	5	550 mm	720 mm	829.051
	Flex. scissors 7 FR WL 375 mm	7	375 mm	490 mm	830.07
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	680 mm	8735.685
Mouse tooth	Flex. grasping forceps 6.6 FR WL 550 mm	6.6	550 mm	690 mm	8736.685



#### FLEXIBLE FORCEPS AND SCISSORS

#### RECOMMENDED FOR URETERORENOSCOPY

		Fr	WL	TL	Product no.
***************************************	Flex. grasping forceps 3 FR WL 530 mm	3	530 mm	665 mm	828.605
iiiiii a	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	720 mm	828.051
Fine toothing	Flex. grasping forceps 3 FR WL 920 mm	3	920 mm	1,050 mm	828.651
	Flex. biopsy forceps 5 FR WL 550 mm	5	550 mm	720 mm	829.051
	Flex. biopsy forceps 3 FR WL 530 mm	3	530 mm	665 mm	829.603
	Flex. biopsy forceps Ø 3 FR WL 920 mm	3	920 mm	1,055 mm	829.601
	Flex. biopsy forceps 4 FR WL 600 mm	4	600 mm	730 mm	8734.606
Pike-mouth jaws	Flex. grasping forceps 4 FR WL 600 mm	4	600 mm	750 mm	8734.656
Mouse tooth	Flex. grasping forceps 4 FR WL 600 mm	4	600 mm	750 mm	8734.686
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	700 mm	8735.685
	Flex. grasping forceps 3.5 FR WL 550 mm, Fine toothing	3.5	550 mm	700 mm	8953.60



#### FLEXIBLE FORCEPS AND SCISSORS

#### RECOMMENDED FOR NEPHROSCOPY

		Fr	WL	TL	Product no.
Flex. grasping forceps 3 FR WL 530 mm  Flex. grasping forceps 5 FR WL 550 mm	3	530 mm	665 mm	828.605	
	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	720 mm	828.051
	Flex. biopsy forceps 5 FR WL 550 mm	5	550 mm	720 mm	829.051
F	Flex. grasping forceps 5 FR WL 550 mm	5	550 mm	680 mm	8735.685
Mouse tooth	Flex. grasping forceps 6.6 FR WL 550 mm	6.6	550 mm	690 mm	8736.685

## 


spirit of excellence

#### **ELECTRODES**

		Area of applica- tion	Electrode shape	WL	Fr	Product no.
	Coag. electrode mono 5 FR WL 600 mm	Ureterorenoscopy	Button	600 mm	5	8599.80
	Coag. electrode mono 4 FR WL 400 mm	- Cystoscopy		Button 400 mm	4	823.04
	Coag. electrode mono 5 FR WL 400 mm		Dutton		5	823.05
	Coag. electrode mono 6 FR WL 400 mm		BUIIOII		6	823.06
	Coag. electrode mono 10 FR WL 400 mm				10	823.10
	Coag. electrode mono 3 FR WL 580 mm	Ureterorenoscopy	Button	580 mm	3	823.031
	Hook electrode mono 2.4 FR WL 600 mm	Ureterorenoscopy	Hook	600 mm	2.4	823.221





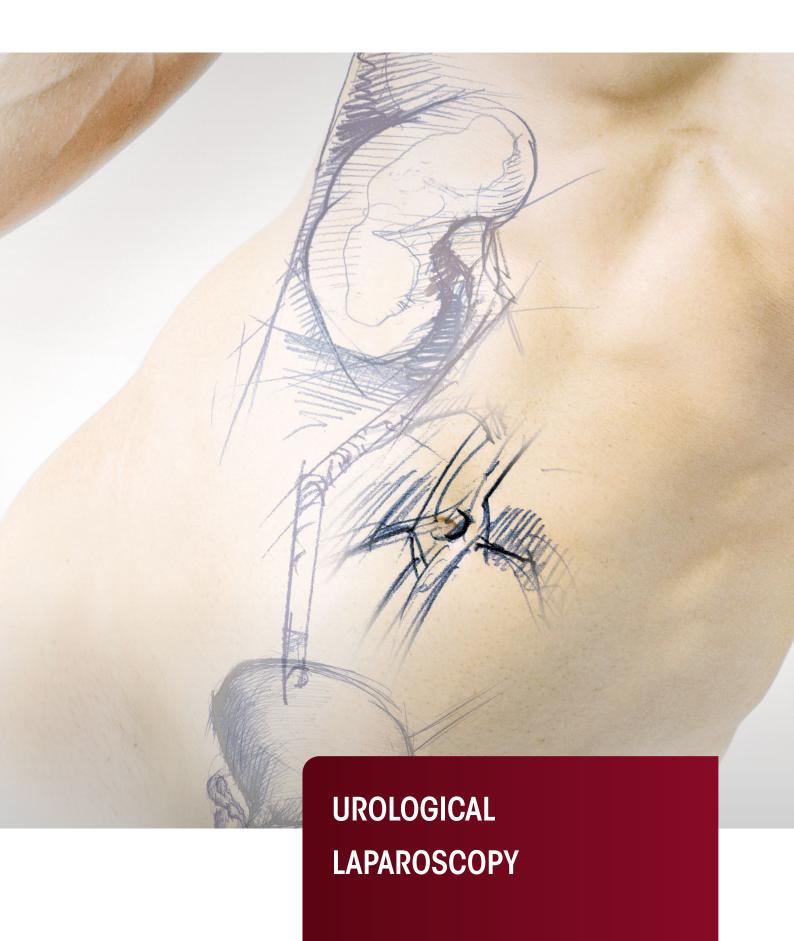



#### **UROLOGICAL LAPAROSCOPY**

BASIC SE	rs
TELESCOF	PES
TROCAR S	SLEEVES/DILATION/EXTRACTION/REDUCING SLEEVES
ERAGONN	IODULAR GRASPING FORCEPS/DISSECTORS/BIOPSY FORCEPS/SCISSORS
GRASPING	FORCEPS
BIPOLAR I	FORCEPS AND SCISSORS
HF ELECTI	RODES (MONOPOLAR/BIPOLAR)
MULTIFUN	ICTIONAL SUCTION IRRIGATION SYSTEM
TISSUE RE	ETRACTOR
CLIP APPL	ICATOR
NEEDLE H	OLDER/KNOT PUSHER/FASCIA CLOSURE
CANNULA	S/SURGICAL PROBES/MYOMA DRILLS
DEVICES/	ACCESSORIES
CHOLEDO	CHOSCOPY
TRAINING	MODELS

### BASIC SET

#### FOR ALL LAPAROSCOPIC PROCEDURES

Product	Product no.	Quantity	Catalog / Section
Insufflator 45 EVAC + HEAT bndl	22350311	1	Laparoscopy / 14
VERES cannula Ø 2.1 mm WL 152 mm	8302.12	1	Laparoscopy / 3
LAP suction irrigation pump bndl	22160011	1	Laparoscopy / 14
LED light source ENDOLIGHT LED 2.1 bndl	51630011	1	Imaging / Light sources
Fiber light cable		1	Imaging / Light cables
ENDOCAM Logic HD	5525	1	Imaging / ENDOCAM
Monitors		1	Imaging / Monitors
Device cart		1	Imaging / Device cart

## BASIC SET FOR LAPAROSCOPIC CHOLECYSTECTOMY

Product	Product no.	Quantity	Catalog / Section
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Laparoscopy / 2
and/or			
Telescope 0° Ø 10 mm WL 307 mm	8934.431	1	Laparoscopy / 2
Fiber light cable bndl	806650231	1	Laparoscopy / 2
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	2–3	Laparoscopy / 3
and/or			
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.351	2–3	Laparoscopy / 3
Trocar sleeve, slanted, capacity 10 mm WL 100 mm	8923.013	2	Laparoscopy / 3
Guide rod 5.5 mm TL 500 mm	8923.921	1	Laparoscopy / 3
Instrument sleeve 10 mm WL 170 mm	8385.50	1	Laparoscopy / 3
VERES cannula Ø 2.1 mm WL 152 mm	8302.12	1	Laparoscopy / 3
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 310 mm	8383.911	1	Laparoscopy / 8
Suction irrigation handle	8385.901	1	Laparoscopy / 8
Sealing cap	8385.902	1	Laparoscopy / 8
ERAGONmodular			
Atraumatic grasping forceps Ø 5 mm bndl	83932925	1	Laparoscopy / 4
Atraumatic grasping forceps mono Ø 5 mm bndl	83931817	2	Laparoscopy / 4
Maryland dissector forceps mono Ø 5 mm bndl	83932817	1	Laparoscopy / 4
Metzenbaum scissors Ø 5 mm bndl	83930417	1	Laparoscopy / 4
Grasping forceps Ø 10 mm bndl	83952048	1	Laparoscopy / 4
Plate-shaped grasping forceps Ø 10 mm bndl	83952347	1	Laparoscopy / 4
Hook electrode mono Ø 5 mm WL 340 mm	8383.423	1	Laparoscopy / 7
Clip applicator Ø 10 mm WL 340 mm	8389.911	1	Laparoscopy / 10
Ethicon® Ligaclips® (PACK= 108 PCS)	8389.915	1	Laparoscopy / 10
Needle forceps Ø 2.45 mm WL 160 mm	8756.201	1	Laparoscopy / 11
Sealing cone Ø 12–15 mm	8943.915	1	Laparoscopy / 11
Monopolar HF cable	8106	2	Laparoscopy / 14

#### **BASIC SET**

#### FOR LAPAROSCOPIC CHOLECYSTECTOMY

Product	Product no.	Quantity	Catalog / Section
Also on request:	'		
Telescope 30° Ø 5.3 mm WL 303 mm	8935442	1	Laparoscopy / 2
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	1	Laparoscopy / 3
Trocar tip sharp size 5.5 mm WL 169 mm	8921.113	1	Laparoscopy / 3
ERAGONmodular			
Atraumatic grasping forceps mono Ø 5 mm bndl	83931957	1	Laparoscopy / 4
Biopsy forceps mono Ø 5 mm bndl	83930937	1	Laparoscopy / 4
Dissector forceps Ø 10 mm bndl	83952268	1	Laparoscopy / 4
ERAGONbipolar			
Grasping forceps bipo Ø 5.5 mm bndl	839300312	1	Laparoscopy / 6

In addition to laparoscopic choledochus revision			
Grasping forceps Ø 5 mm WL 295 mm	8383311	1	Laparoscopy / 5



### BASIC SET FOR LAPAROSCOPIC APPENDECTOMY

Product	Product no.	Quantity	Catalog / Section
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Laparoscopy / 2
and/or			
Telescope 0° Ø 10 mm WL 307 mm	8934.431	1	Laparoscopy / 2
Fiber light cable bndl	806650231	1	Laparoscopy / 2
Trocar sleeve, slanted, capacity 10 mm WL 100 mm	8923.013	2	Laparoscopy / 3
Trocar tip sharp size 10 mm	8923.113	2	Laparoscopy / 3
and/or			
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.351	2–3	Laparoscopy / 3
Trocar tip sharp size 5.5 mm WL 144 mm	8919.3512	2–3	Laparoscopy / 3
Trocar sleeve, slanted, capacity 5.5 mm WL 100 mm	8921.013	2–3	Laparoscopy / 3
Trocar tip sharp size 5.5 mm WL 169 mm	8921.113	2–3	Laparoscopy / 3
Guide rod 5.5 mm TL 500 mm	8923.921	1	Laparoscopy / 3
Instrument sleeve 10 mm WL 170 mm	8385.50	1	Laparoscopy / 3
ERAGONmodular	'		
Grasping forceps mono Ø 5 mm bndl	83932877	1	Laparoscopy / 4
Atraumatic grasping forceps mono Ø 5 mm bndl	83931817	2	Laparoscopy / 4
Maryland dissector forceps mono Ø 5 mm bndl	83932817	1	Laparoscopy / 4
Metzenbaum scissors Ø 5 mm bndl	83930417	1	Laparoscopy / 4
Grasping and dissector forceps 5 mm	83932827	1	Laparoscopy / 4
ERAGONbipolar			
Grasping forceps bipo Ø 5.5 mm bndl	839300312	1	Laparoscopy / 6
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 310 mm	83839.11	1	Laparoscopy / 8
Suction irrigation handle	8385.901	1	Laparoscopy / 8
Sealing cap	8385.902	1	Laparoscopy / 8
Surgical probe Ø 5 mm WL 328 mm	8383.66	1	Laparoscopy / 12
VERES cannula Ø 2.1 mm WL 152 mm	8302.12	1	Laparoscopy / 3
Bipolar HF cable	8108	1	Laparoscopy / 14
Monopolar HF cable	8106	1	Laparoscopy / 14

### BASIC SET

#### FOR LAPAROSCOPIC APPENDECTOMY

Product	Product no.	Quantity	Catalog / Section
Also on request:			
ERAGONmodular			
Dissector forceps mono Ø 5 mm bndl	83932897	1	Laparoscopy / 4
Grasping forceps mono Ø 5 mm bndl	83931837	2	Laparoscopy / 4
Biopsy forceps mono Ø 5 mm bndl	83930917	1	Laparoscopy / 4
Maryland dissector forceps Ø 10 mm bndl	83952257	1	Laparoscopy / 4
Clip applicator Ø 10 mm WL 340 mm	8389.911	1	Laparoscopy / 10
Ethicon® Ligaclips® (PACK= 108 PCS)	8389.915	1	Laparoscopy / 10
Introduction sleeve 10 mm WL 80 mm	8389.991	1	Laparoscopy / 10
Needle holder Ø 5 mm bndl	8393.502	1	Laparoscopy / 11



#### **BASIC SET LEVD**

#### LAPAROSCOPIC SINGLE-CHANNEL VARICOCELE DISSECTION

Product	Product no.	Quantity	Catalog / Section
OR endoscope bndl	8920.4011	1	Laparoscopy / 2
Perforated basket for telescope	38008		Laparoscopy / 2
Fiber light cable bndl	806625231	1	Laparoscopy / 2
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm	8919.353	1	Laparoscopy / 3
Optional:			
Trocar tip blunt size 5.5 mm WL 144 mm	8919.3511	1	Laparoscopy / 3
Trocar tip sharp size 5.5 mm WL 144 mm	8919.3512	1	Laparoscopy / 3
Trocar tip triangular size 5.5 mm WL 144 mm	8919.3513	1	Laparoscopy / 3
ERAGONmodular mini			
Universal grasping forceps Ø 3.5 mm bndl	83912097	1	Laparoscopy / 4
Atraumatic grasping forceps Ø 3.5 mm bndl	83912087	1	Laparoscopy / 4
Babcock forceps Ø 3.5 mm bndl	83912107	1	Laparoscopy / 4
Dissector forceps mono Ø 3.5 mm bndl	83912077	1	Laparoscopy / 4
Hook scissors mono Ø 3.5 mm bndl	83912277	1	Laparoscopy / 4
Metzenbaum scissors mono Ø 3.5 mm bndl	83912247	1	Laparoscopy / 4
Connection cable	·		
Bipolar HF cable	8108	1	Laparoscopy / 14
Monopolar HF cable	8106	1	Laparoscopy / 14



### BASIC SET MINI E-MILOS

**Product** Product no. Quantity Catalog / Section Telescope 30° Ø 10 mm WL 307 mm 8934.432 1 Laparoscopy / 2 Light tube for MILOS method  $\emptyset$  10 mm 893420 1 Laparoscopy / 2 Trocar sleeve, straight, capacity 3.5 mm WL 100 mm 8903.014 2 Laparoscopy / 3 Trocar tip blunt size 3.5 mm WL 169 mm 8903.103 2 Laparoscopy / 3 ERAGONmodular mini Handle, pistol-shaped, mono 83930073 4 Laparoscopy / 4 Sheath tube insulated  $\emptyset$  3.5 mm SL 330 mm 8391933 4 Laparoscopy / 4 Dissector forceps insert Ø 3.5 mm 8391222 1 Laparoscopy / 4 Metzenbaum scissors insert Ø 3.5 mm 8391215 Laparoscopy / 4 Grasping forceps insert Ø 3.5 mm 8391208 2 Laparoscopy / 4 Electrode Hook electrode mono Ø 3.5 mm WL 310 mm 8379.452 Laparoscopy / 7 **ERAGONstitch** 8391506 1 Laparoscopy / 11 Needle holder insert Ø 3.5 mm Sheath tube Ø 3.5 mm SL 330 mm 8391533 1 Laparoscopy / 11 Needle holder handle, axial 8393943 1 Laparoscopy / 11



## BASIC SET E-MILOS

Product	Product no.	Quantity	Catalog / Section
Telescope 30° Ø 10 mm WL 307 mm	8934.432	1	Laparoscopy / 2
Light tube for MILOS method Ø 10 mm	893420	1	Laparoscopy / 2
Trocar sleeve, straight, capacity 5.5 mm WL 100 mm	8921.014	2	Laparoscopy / 3
Trocar tip blunt size 5.5 mm WL 169 mm	8921.103	2	Laparoscopy / 3
ERAGONmodular			
Handle, pistol-shaped, mono	83930073	4	Laparoscopy / 4
Sheath tube insulated Ø 5 mm SL 330 mm	8391933	4	Laparoscopy / 4
Dissector forceps insert Ø 5 mm	8393240	1	Laparoscopy / 4
Metzenbaum scissors insert Ø 5 mm	8393.041	1	Laparoscopy / 4
Grasping forceps insert Ø 5 mm	8393.181	2	Laparoscopy / 4
Electrode			
Hook electrode mono Ø 5 mm WL 340 mm	8383.423	1	Laparoscopy / 7
ERAGONstitch			
Needle holder insert Ø 5 mm	8393508	1	Laparoscopy /11
Sheath tube Ø 5 mm SL 330 mm	8393533	1	Laparoscopy / 11
Needle holder handle, axial	8393943	1	Laparoscopy / 11



#### **BASIC SET**

#### LAPAROSCOPIC BARIATRIC SURGERY

Product	Product no.	Quantity	Catalog / Section
Telescope 0° Ø 10 mm WL 305 mm	8934461	1	Laparoscopy / 2
Telescope 30° Ø 10 mm WL 305 mm	8934462	1	Laparoscopy / 2
Fiber light cable bndl	806550231	1	Laparoscopy / 2
Trocar sleeve, straight, capacity 5.5 mm WL 150 mm	8921.016	3	Laparoscopy / 3
Trocar sleeve, straight, capacity 10 mm WL 150 mm	8923.016	1	Laparoscopy / 3
Trocar sleeve, straight, capacity 12.5 mm WL 150 mm	8924.016	1	Laparoscopy / 3
Optional:			
Trocar tip sharp size 5.5 mm	8921.115	3	Laparoscopy / 3
Trocar tip sharp size 10 mm	8923.115	1	Laparoscopy / 3
Trocar tip sharp size 12.7 mm	8924.115	1	Laparoscopy / 3
Reducing adapter	8923.802	1	Laparoscopy / 3
Multifunctional suction irrigation system			
Suction irrigation tube Ø 5 mm WL 450 mm	8384.911	1	Laparoscopy / 8
Suction irrigation handle	8385.901	1	Laparoscopy / 8
Sealing cap	8385.902	1	Laparoscopy / 8
Suction irrigation tube set with piercing spike L 3 m	4170.956	1	Laparoscopy / 8
ERAGONmodular			
Atraumatic grasping forceps mono Ø 5 mm bndl	83941817	1	Laparoscopy / 4
Dissector forceps mono Ø 5 mm bndl	83942407	1	Laparoscopy / 4
Metzenbaum scissors mono Ø 5 mm bndl	83940417	1	Laparoscopy / 4
Atraumatic Grasping forceps Ø 5 mm bndl	83942297	1	Laparoscopy / 4
Biopsy forceps mono Ø 5 mm bndl	83940917	1	Laparoscopy / 4
Atraumatic Grasping forceps Ø 5 mm bndl	83942507	1	Laparoscopy / 4
Stapler head grasping forceps Ø 10 mm bndl	83976558	1	Laparoscopy / 4
Plate-shaped grasping forceps Ø 10 mm bndl	83962347	1	Laparoscopy / 4
Babcock forceps Ø 10 mm bndl	83961877	1	Laparoscopy / 4
ERAGONbipolar			
Maryland dissector bipo Ø 5.5 mm bndl	839400322	1	Laparoscopy / 6
Metzenbaum scissors bipo Ø 5.5 mm bndl	839400412	1	Laparoscopy / 6
Electrode			
Hook electrode mono Ø 5 mm WL 420 mm	8384.423	1	Laparoscopy / 7




#### **BASIC SET**


#### LAPAROSCOPIC BARIATRIC SURGERY

Product	Product no.	Quantity	Catalog / Section
Clip applicator Ø 10 mm WL 340 mm	8389.911	1	Laparoscopy / 10
Ethicon® Ligaclips® (PACK= 108 PCS)	8389.915	1	Laparoscopy / 10
Needle holder Ø 5 mm bndl with carbide insert	8394.502	1	Laparoscopy / 11
Needle holder Ø 5 mm bndl curved to the right with carbide insert	8394.511	1	Laparoscopy / 11
Needle forceps Ø 2.45 mm WL 160 mm	8756.201	1	Laparoscopy / 11
Sealing cone Ø 12–15 mm	8943.915	1	Laparoscopy / 11
Sealing cone Ø 10–12 mm	8934.915	1	Laparoscopy / 11
VERES cannula Ø 2.1 mm WL 152 mm	8302.12	1	Laparoscopy / 3
Handle, axial, mono	83930084	1	Laparoscopy / 14
Rotatable knob	8988	1	Laparoscopy / 14
Connection cable	·		
Mono HF connection cable L 3 m	8106.033	1	Laparoscopy / 13
Bipo HF connection cable L 3 m	8108.132	1	Laparoscopy / 13



#### MINI FIBER TELESCOPES 2.0 MM



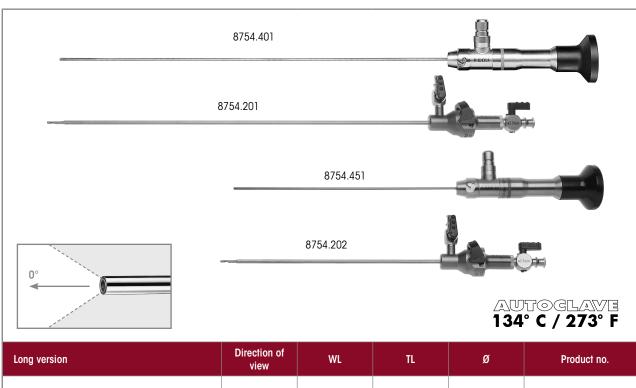


Long version	Direction of view	WL	TL	Ø	Product no.	
Telescope 0° Ø 2 mm NL 268 mm	0°	268 mm	365 mm	2.0 mm	8754.401	
for this:	for this:					
VERES cannula Ø 2.3 mm WL 250 mm consisting of:  1x VERES cannula Ø 2.3 mm WL 274 mm (8754.21) 1x outer sheath Ø 2.8 mm, WL 250 mm (8754.221)	250 mm		2.3 mm	8754.201		
Short version	Direction of view	WL	TL	Ø	Product no.	
Short version  Telescope 0° Ø 2 mm NL 158 mm		<b>WL</b> 158 mm	<b>TL</b> 255 mm	Ø 2.0 mm	Product no. 8754.451	
	view		·			

Recommended accessories		Product no.
Perforated basket for standard telescope 1 (for telescope 8754.451)	(W x H x D) 297 x 54 x 59 mm	38015
Perforated basket for standard telescope 2 (for telescope 8754.401)	(W x H x D) 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231


III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### LAPAROSCOPES 3.5 MM

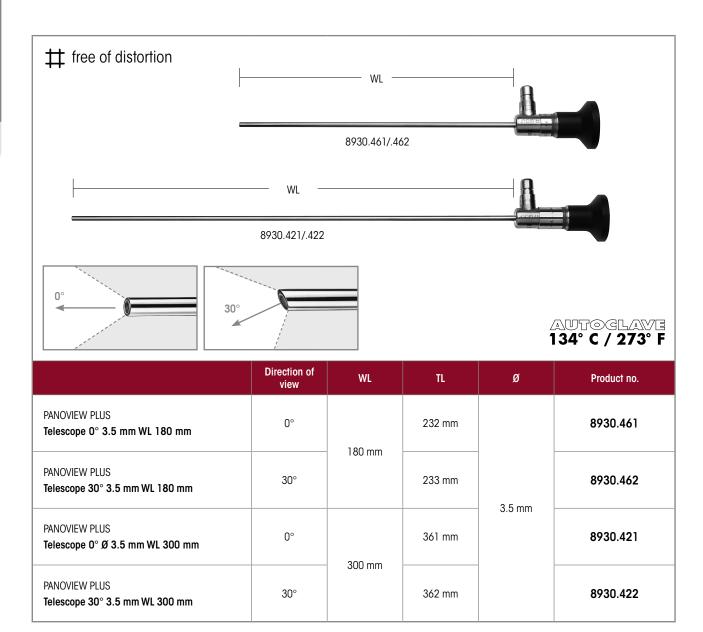

Recommended accessories		Product no.
Perforated basket for standard telescope 1 (for telescope 8930.461/.462)	(W x H x D) 297 x 54 x 59 mm	38015
Perforated basket for standard telescope 2 (for telescope 8930.421/.422)	(W x H x D) 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231

#### LAPAROSCOPES 5.3 MM

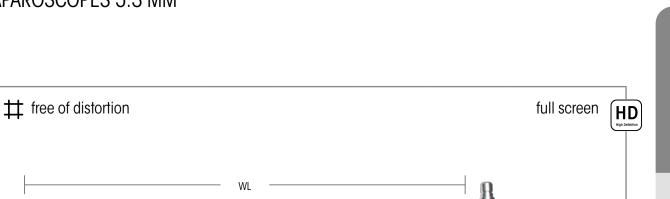




	Direction of view	WL	TL	Ø	Product no.	
PANOVIEW Telescope 0° Ø 5.3 mm WL 303 mm	0°	372 mm		372 mm		8935.441
PANOVIEW Telescope 30° Ø 5.3 mm WL 303 mm	30°	303 mm	373 mm	5.3 mm	8935.442	
PANOVIEW Telescope 50° Ø 5.3 mm WL 309 mm	50°	309 mm	377 mm		8935.443	

Recommended accessories		Product no.
Perforated basket for standard telescope 2	(W x H x D) 481 x 54 x 59 mm	38016
Fiber light cable bndl consisting of: Fiber light cable (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



### MINI OR LAPAROSCOPE 5.5 MM WITH 3.5 MM WORKING CHANNEL



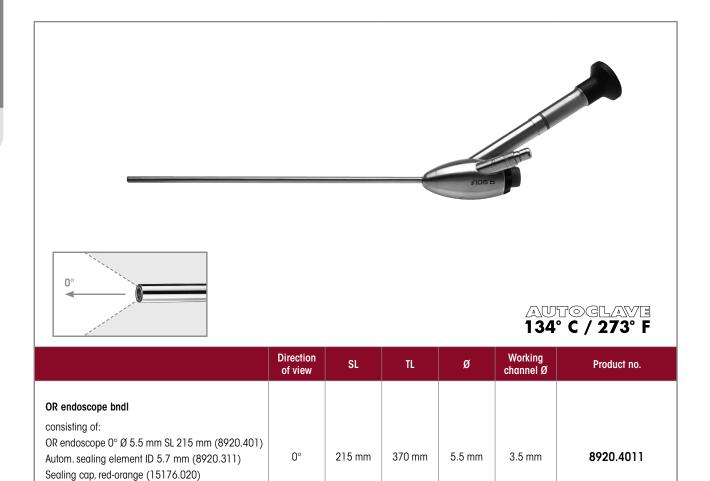

Recommended accessories		Product no.
Trocar sleeve, straight, capacity 5.5 mm WL 62 mm	į.	8919.333
Trocar sleeve, straight, capacity 5.5 mm WL 102 mm		8919.353
Perforated basket for telescope Dimensions (W x L x H): 132 x 467 x 75 mm		38008
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 3.5 mm, 2.3 m long	806635231

Sealing membrane Ø 17 mm (PACK= 10 PCS)

(89.103)

PANOVIEW ULTRA

PANOVIEW ULTRA


Telescope Ø 5.5 mm WL 430 mm

Telescope Ø 5.5 mm WL 430 mm





spirit of excellence

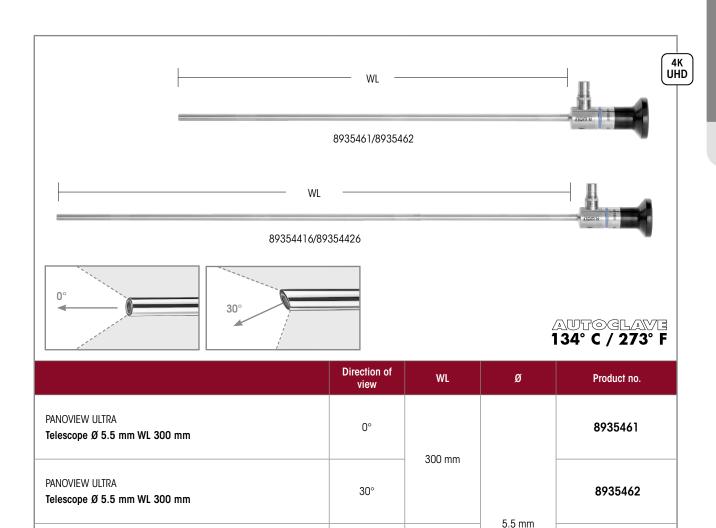

Recommended accessories		Product no.
Perforated basket for standard telescope 2 (for telescope 8935416/8935426)	(W x H x D) 481 x 54 x 59 mm	38016
Perforated basket for standard telescope 3 (for telescope 89354416/89354426)	(W x H x D) 619 x 54 x 59 mm	38017
Fiber light cable bndl consisting of: Fiber light cable (80663523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 3.5 mm, 2.3 m long	806635231

0°

30°

430 mm


89354416

89354426

# 

spirit of excellence

### LAPAROSCOPES 10 MM

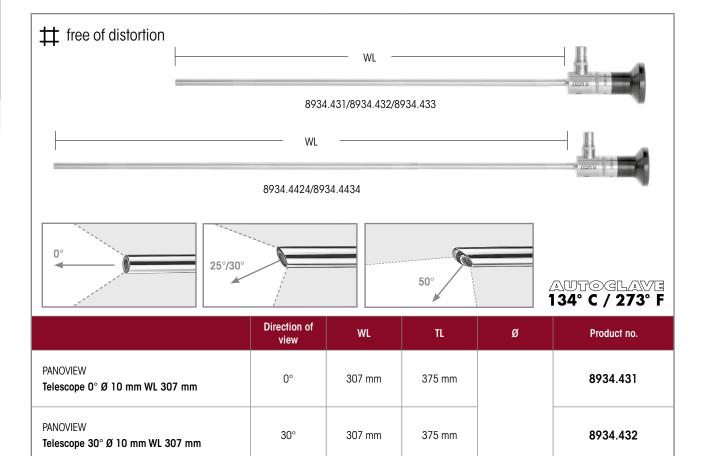

310 mm

438 mm

447 mm

378 mm

507 mm

516 mm

10 mm

Recommended accessories		Product no.
Perforated basket for standard telescope 2 (for telescope 8934.431/.432/.433)	(W x H x D) 481 x 54 x 59 mm	38016
Perforated basket for standard telescope 3 (for telescope 8934.4424/.4434)	(W x H x D) 619 x 54 x 59 mm	38017
Fiber lightcable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion  Fiber light cable bndl consisting of:  Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231

50°

25°

50°

8934.433

8934.4424

8934.4434

PANOVIEW

PANOVIEW PLUS

PANOVIEW PLUS


Telescope 50° Ø 10 mm WL 310 mm

Telescope 25° Ø 10 mm WL 438 mm

Telescope 50° Ø 10 mm WL 447 mm



### 3D ENDOSCOPE 10 MM

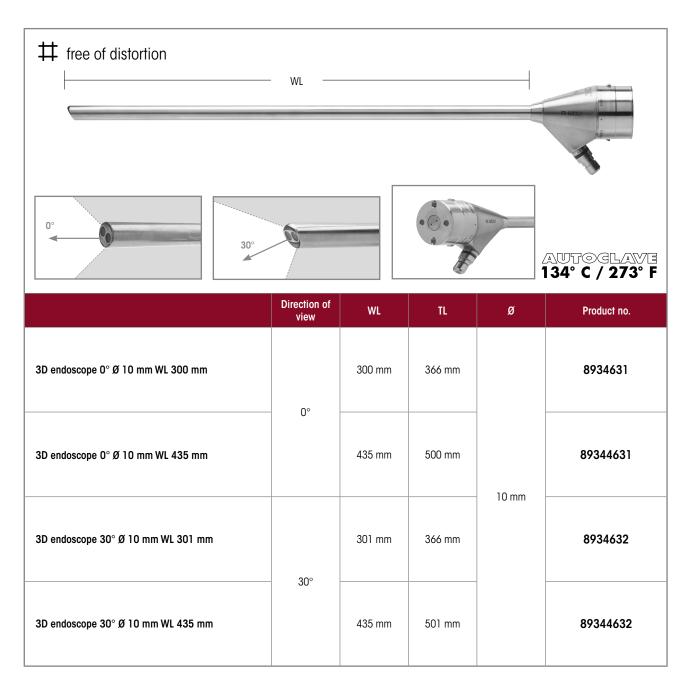


Recommended accessories			Product no.
Perforated basket for 3D telescope		(W x H x D): 583 x 200 x 80 mm	38014
Fusion  Fiber light cable bndl consisting of:  Fiber light cable Ø 5 mm TL 2.3 m (806 adapter (8095.07), and endoscope-sid	, , ,	Ø 5.0 mm, 2.3 m long	806550231



III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

### SURGICAL LAPAROSCOPE 10 MM

#### FOR ONE HOLE APPENDECTOMY

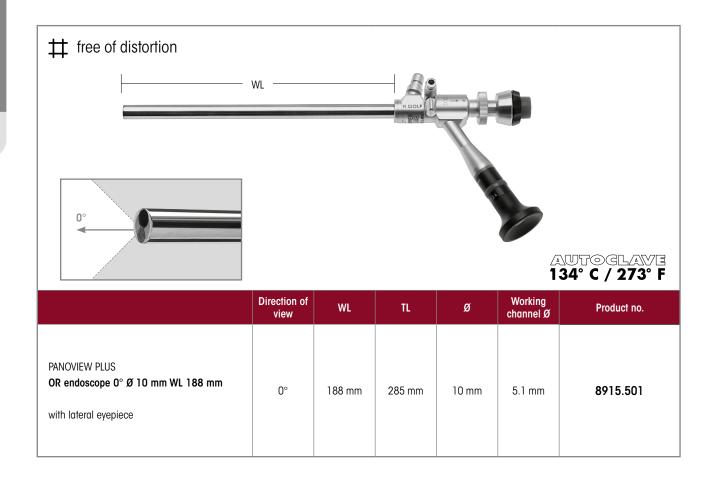

Recommended accessories		Product no.
Universal perforated basket 4 (W x H x D): 538 x 117 x 250 mm	- CE	33004
for this: Instrument mat for perforated basket		33001
Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion  Fiber light cable bndl consisting of:  Fiber light cable Ø 5 mm TL 2.3 m (80655023),  projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231





#### OPTIMIZED FOR 4K UHD AND ICG/NIR APPLICATION SHORT VERSION



Note: Compatible with System green (see Imaging Catalog) (ICG/NIR-capable) and its recommended Fusion fiber light cable

Recommended accessories		Product no.
Perforated basket for standard telescope 2	(W x H x D) 481 x 54 x 59 mm	38016
Fiber lightcable bndl consisting of: Fiber light cable $\varnothing$ 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion fiber light <b>cable bndI</b> consisting of: Fiber light cable $\varnothing$ 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231





#### OPTIMIZED FOR 4K UHD AND ICG/NIR APPLICATION LONG VERSION

spirit of excellence




Note: Compatible with System green (see Imaging Catalog) (ICG/NIR-capable) and its recommended Fusion fiber light cable

Recommended accessories		Product no.
Perforated basket for standard telescope 3	(W x H x D) 619 x 54 x 59 mm	38017
Fiber lightcable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion  Fiber light cable bndl consisting of: Fiber light cable Ø 5 mm TL 2.3 m (80655023), projector-side adapter (8095.07), and endoscope-side adapter (8095.09)	Ø 5.0 mm, 2.3 m long	806550231



### LIGHT TUBE FOR MILOS METHOD

(MINI LESS OPEN SUBLAY METHOD)

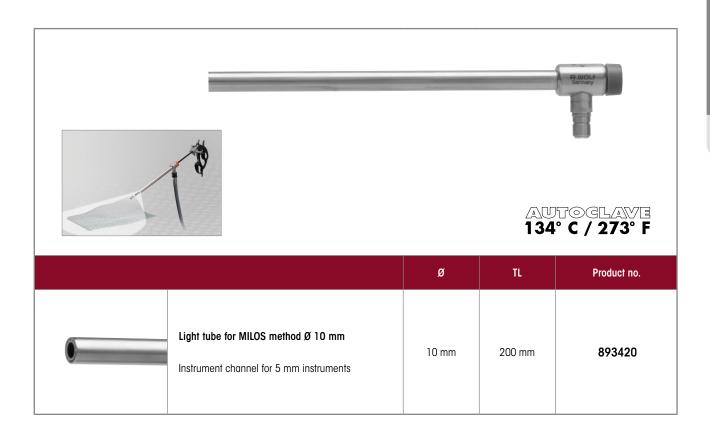


Recommended accessories		Product no.
<b>Fiber light cable bndl</b> consisting of: Fiber light cable $\emptyset$ 5 mm, TL 2.3 m (80665023), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806650231
Fusion  Fiber light cable bndl consisting of:  Fiber light cable Ø 5 mm, TL 2.3 m (80655023),  projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 5.0 mm, 2.3 m long	806550231
Sealing cap, sulfur yellow, cap. 1.3 mm		8934201



# LAPAROSCOPES

#### **ACCESSORIES**

		Product no.
Sterile adapter	immersible and autoclavable for changing telescopes	8580.91

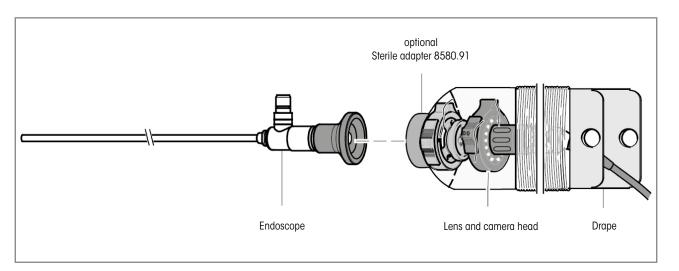



# TROCAR SLEEVES 2.2 / 2.5 MM

	Tip triangular  Trocar tip triangular Size 2.2 mm			
Plastic sheath tube with thread	WL	Capacity	Product no.	WL 82 mm
Trocar sleeve capacity 2.2 mm WL 60 mm with universal sealing valve	60 mm	2.2 mm	8309.072	8309.121

Trocar sleeve with insufflation connector				
Stainless steel sheath tube, smooth	WL	Capacity	Product no.	WL 82 mm
Trocar sleeve capacity 2.5 mm WL 95 mm	95 mm	2.5 mm	8309.014	8309.121
				WL 119 mm
Trocar sleeve capacity 2.5 mm WL 95 mm	95 mm	2.5 mm	8309.014	8309.123

Accessories	Product no.
Rubber cap capacity 0.8 mm (PACK= 10 PCS) red	88.01



# TROCAR SLEEVES 3.5 MM

### WITH INSUFFLATION STOPCOCK

RIWO-ART trocar sleeves with magnetic ball valve with insufflation stopcock	c ball valve			Tip tapered/blunt  Trocar tip blunt Size 3.5 mm	Tip triangular  Trocar tip triangular Size 3.5 mm
Stainless steel sheath tube, smooth	WL	Capacity	Product no.	WL 169 mm	WL 169 mm
Trocar sleeve straight capacity 3.5 mm WL 100 mm	100 mm	3.5 mm	8903.014	8903.103	8903.123
Plastic sheath tube with thread					
Trocar sleeve straight capacity 3.5 mm WL 100 mm	100 mm	3.5 mm	8903.034	8903.103	8903.123
		1		WL 129 mm	WL 129 mm
Trocar sleeve slanted capacity 3.5 mm WL 60 mm	60 mm	3.5 mm	8903.072	8903.101	8903.121

Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 2.4–3.4 mm (PACK= 10 PCS) red	89.01
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002

Trocar sleeve with membrane valve	Tip tapered/blunt			
				Trocar tip blunt Size 3.5 mm
Plastic sheath tube with distal screw anchor	WL	Capacity	Product no.	WL 169 mm
Trocar sleeve straight capacity 3.5 mm WL 40 mm	40 mm	3.5 mm	8929.223	8903.103



# TROCAR SLEEVES 5.5 MM

RIWO-ART trocar sleeves with magnetic ball valve with insufflation stopcock				Tip tapered/blunt  Trocar tip	Tip tapered/pointed	Tip triangular  Trocar tip
				blunt Size 5.5 mm	pointed Size 5.5 mm	triangular Size 5.5 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 169 mm	WL 169 mm	WL 169 mm
Trocar sleeve straight capacity 5.5 mm WL 100 mm smooth	100 mm	5.5 mm	8921.014	8921.103	8921.113	8921.123
Trocar sleeve slanted capacity 5.5 mm WL 100 mm smooth	100 mm	5.5 mm	8921.013	8921.103	8921.113	8921.123
Trocar sleeve straight capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.024	8921.103	8921.113	8921.123
Trocar sleeve slanted capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.023	8921.103	8921.113	8921.123
Plastic tube Trocar sleeve straight capacity 5.5 mm WL 100 mm with thread	100 mm	5.5 mm	8921.034	8921.103	8921.113	8921.123
				WL 219 mm	WL 219 mm	WL 219 mm
Trocar sleeve straight capacity 5.5 mm WL 150 mm smooth	150 mm	5.5 mm	8921.016	8921.105	8921.115	8921.125
Trocar sleeve straight capacity 5.5 mm WL 150 mm with thread	150 mm	5.5 mm	8921.026	8921.105	8921.115	8921.125

Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 3.4-5.1 mm (PACK= 10 PCS) blue	89.02
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002

# 

spirit of excellence

#### TROCAR SLEEVES 5.5 MM


**RIWO-ART trocar sleeves** Tip Tip Tip tapered/blunt tapered/ triangular with magnetic ball valve pointed Trocar tip Trocar tip Trocar tip blunt pointed triangular Size 5.5 mm Size 5.5 mm Size 5.5 mm Stainless steel sheath tube WL Capacity Product no. WL 129 mm WL 129 mm WL 129 mm Trocar sleeve straight capacity 5.5 mm 8921.052 8921.101 8921.111 WL 60 mm 60 mm 5.5 mm 8921.121 smooth Trocar sleeve slanted capacity 5.5 mm 8921.101 8921.111 60 mm 5.5 mm 8921.051 8921.121 WL 60 mm smooth Trocar sleeve straight capacity 5.5 mm 60 mm 5.5 mm 8921.062 8921.101 8921.111 8921.121 WL 60 mm with thread Trocar sleeve slanted capacity 5.5 mm 60 mm 5.5 mm 8921.061 8921.101 8921.111 8921.121 WL 60 mm with thread Plastic tube Trocar sleeve straight capacity 5.5 mm 60 mm 5.5 mm 8921.072 8921.101 8921.111 8921.121 WL 60 mm with thread WL 169 mm WL 169 mm WL 169 mm Trocar sleeve straight capacity 5.5 mm 100 mm 5.5 mm 8921.054 8921.103 8921.113 8921.123 WL 100 mm smooth Trocar sleeve straight capacity 5.5 mm 8921.103 8921.113 100 mm 5.5 mm 8921.053 8921.123 WL 100 mm with thread


Accessories	Product no.
Spare ball capacity 5.5 mm	8921.901
Spare O rings capacity 3.5 mm (PACK= 10 PCS), capacity Ø 3.5–5.5 mm	8921.951
Sealing cap capacity 3.4–5.1 mm (PACK= 10 PCS) blue	89.02




## **TROTEC** TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION

FOR TROCAR SLEEVES 5.5 MM

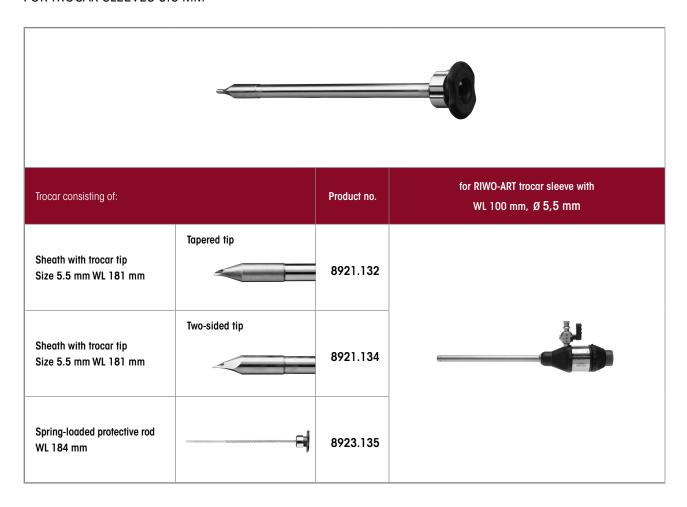




Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum

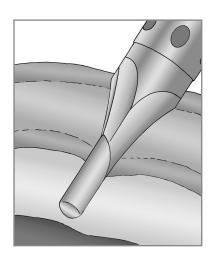

The atraumatic protective tip in a far distal position prevents perforation of organs and vessels

# TROCAR SLEEVE 5.5 MM/5.8 MM

### PLASTIC WITH SEALING MEMBRANE

						Tip tapered/blunt	Tip tapered/pointed	Tip triangular	
AUTOGLAY 134° C / 273°	7 <b>3</b> <b>F</b>					Trocar tip blunt Size 5.5 mm	Trocar tip pointed Size 5.5 mm	Trocar tip triangular Size 5.5 mm	
Flexible plastic sheath tube with thread		WL	Capacity	with stopcock	Product no.	WL 104 mm	WL 104 mm	WL 104 mm	
Trocar sleeve straight				•	8919.333				
capacity 5.5 mm WL 62 m with membrane valve	nm 6	2 mm	5.5 mm		8919.331	8919.3311	8919.3312	8919.3313	
						WL 144 mm	WL 144 mm	WL 144 mm	
Trocar sleeve straight	16			•	8919.353	0010 0511	0010 0510	0010 0510	
capacity 5.5 mm WL 102 with membrane valve	mm   IC	D2 mm	5.5 mm		8919.351	8919.3511	8919.3512	8919.3513	
for curved instruments				Tip tapered/blunt	Tip tapered/pointed	Tip triangular	Tip tapered/blunt		
AUTOGLAN 134° C / 273°	// <b>=</b> <b>^ F</b>				Trocar tip blunt Size 5.5 mm	Trocar tip pointed Size 5.5 mm	Trocar tip triangular Size 5.5 mm	Trocar tip blunt Size 5.5 mm	
Flexible plastic sheath tube with thread	WL	Capaci	y <b>Prod</b>	luct no.	WL 80 mm	WL 80 mm	WL 80 mm	WL 80 mm	
Trocar sleeve straight capacity 5.8 mm WL 62 mm with membrane valve	62 mm	5.8 mr	n <b>890</b>	5.331	8905.3311	8905.3312	8905.3313	8905.3315	
					WL 120 mm	WL 120 mm	WL 120 mm	WL 120 mm	
Trocar sleeve straight capacity 5.8 mm WL 102 mm with membrane valve	102 mm	5.8 mr	n <b>890</b> 5	5.3515	8905.3511	8905.3512	8905.3513	8905.3515	

Accessories	Product no.
Sealing membrane Ø 17 mm, yellow (PACK= 10 PCS)	89.103
Stopcock insert bndl cap 3.0 mm (PACK= 5 PCS)	896.0002



## TROCAR SLEEVE 5.7 MM/7 MM/10 MM/12.5 MM

#### FLEXIBLE PLASTIC SHEATH TUBE



	Tip tapered/blunt  Trocar tip blunt			
Ribbed flexible plastic sheath tube	WL	Capacity	Product no.	Size 7.3 mm/TL 108 mm
Trocar sleeve flexible capacity 7 mm WL 74 mm with universal seal	74 mm	7 mm	8906.001	8913.11
				Size 10 mm/TL 85 mm
Trocar sleeve flexible capacity 10 mm WL 56 mm with universal seal	56 mm	10 mm	8906.011	8906.111
	Size 12.5 mm/TL 86 mm			
Trocar sleeve flexible capacity 12.5 mm WL 57 mm	57 mm	12.5 mm	8906.031	8906.131

# TROCAR SLEEVE 10 MM

### WITH INSUFFLATION STOPCOCK


RIWO-ART trocar sleeves with magnetic ball valve		R. GUOLF 6723.014		Tip tapered/blunt	Tip tapered/pointed	Tip triangular
				Trocar tip blunt Size 10 mm	Trocar tip pointed Size 10 mm	Trocar tip triangular Size 10 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 10 mm WL 100 mm	100 mm	10 mm	8923.014	8923.103	8923.113	8923.123
Trocar sleeve slanted capacity 10 mm WL 100 mm	100 mm	10 mm	8923.013	8923.103	8923.113	8923.123
Trocar sleeve straight capacity 10 mm WL 100 mm with thread	100 mm	10 mm	8923.024	8923.103	8923.113	8923.123
Trocar sleeve slanted capacity 10 mm WL 100 mm with thread	100 mm	10 mm	8923.023	8923.103	8923.113	8923.123
				WL 214 mm	WL 214 mm	WL 214 mm
Trocar sleeve straight capacity 10 mm WL 150 mm	150 mm	10 mm	8923.016	-	8923.115	8923.125
Trocar sleeve straight capacity 10 mm WL 150 mm with thread	150 mm	10 mm	8923.026	-	8923.115	8923.125


Accessories	Product no.
Spare ball capacity 7 mm	8923901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923951
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	8908
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002




## **TROTEC** TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION

FOR TROCAR SLEEVES 10 MM

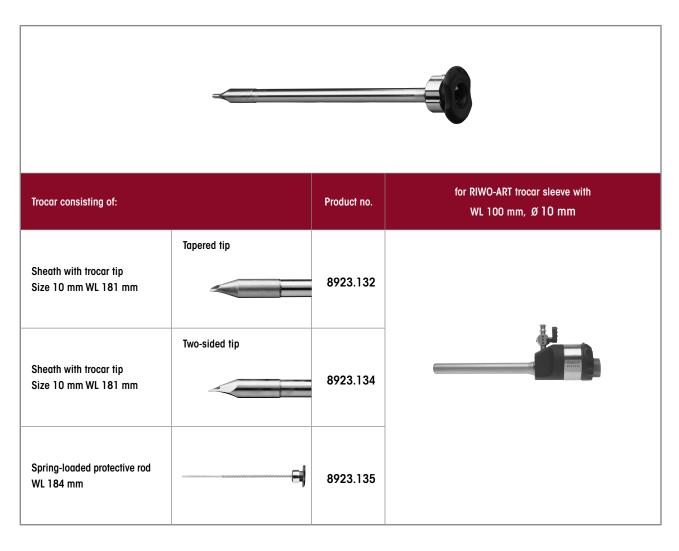




Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum

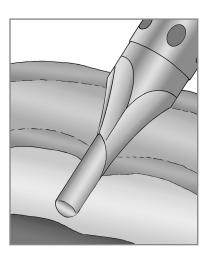

The atraumatic protective tip in a far distal position prevents perforation of organs and vessels



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# HIGH FLOW TROCAR SLEEVE 10 MM

#### WITH CONNECTOR FOR HIGH FLOW INSUFFLATION TUBE

RIWO-ART trocar sleeves with magnetic ball valve		O	100.00	Tip tapered/blunt	Tip tapered/pointed	Tip triangular
				Trocar tip blunt Size 10 mm	Trocar tip pointed Size 10 mm	Trocar tip triangular Size 10 mm
Stainless steel sheath tube	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 10 mm WL 100 mm	100 mm	10 mm	8923.042	8923.103	8923.113	8923.123
for this:						Product no.
Reducing adapter (PACK= 5 PCS)	10		for reduction f Ø 7 mm,Ø 10 to Ø 5.5 mm	rom 1 mm, and Ø 12.5 mm	1	8923802

Accessories	Product no.
Spare ball capacity 7 mm	8923901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923951
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	8908



# TROCAR SLEEVE 12.5 MM

#### WITH INSUFFLATION STOPCOCK

RIWO-ART trocar sleeves with magnetic ball valve			R. WOLF 6723.014		Tip tapered/blunt	Tip tapered/pointed	Tip triangular
					Trocar tip blunt Size 12.7 mm	Trocar tip pointed Size 12.7 mm	Trocar tip triangular Size 12.7 mm
Stainless steel sheath tub	ре	WL	Capacity	Product no.	WL 164 mm	WL 164 mm	WL 164 mm
Trocar sleeve straight capacity 12.5 mm WL 100 mm	•	100 mm	12.5 mm	8924.014	8924.103	8924.113	8924.123
Trocar sleeve slanted capacity 12.5 mm WL 100 mm	·	100 mm	12.5 mm	8924.013	8924.103	8924.113	8924.123
					WL 214 mm	WL 214 mm	WL 214 mm
Trocar sleeve straight capacity 12.5 mm WL 150 mm with thread		150 mm	12.5 mm	8924.026	-	8924.115	8924.125
Trocar sleeve straight capacity 12.5 mm WL 150 mm	• C	150 mm	12.5 mm	8924.016	-	8924.115	8924.125
for this:							
Reducing adapter	*10	for reduction f Ø 10 mm to Ø Ø 12.5 mm to		Ø 5.5 mm and		8923.802	
(PACK= 5 PCS)			for reduction f Ø 12.5 mm to			8924.802	

Accessories	Product no.
Spare ball capacity 7 mm	8923.901
Spare O rings capacity 7 mm (PACK= 10 PCS), capacity Ø 7–12.5 mm	8923.951
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	89.08
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002


# WOLF A


spirit of excellence

III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


# TROTEC TROCAR WITH AUTOMATIC PROTECTIVE FUNCTION

FOR TROCAR SLEEVES 12.5 MM

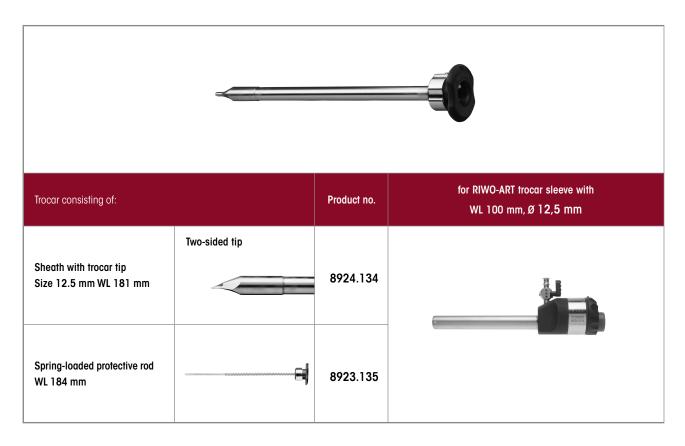




Protective tip automatically pushes back into the cannula through contact with the abdominal wall



The protective tip advances into the free abdomen immediately after penetration of the peritoneum

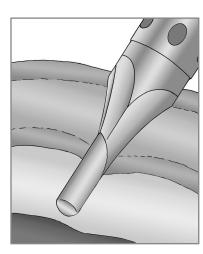


The atraumatic protective tip in a far distal position prevents perforation of organs and vessels



# **DILATATION AND EXTRACTION INSTRUMENTS**


5.5 TO 10/10 TO 12.5 MM

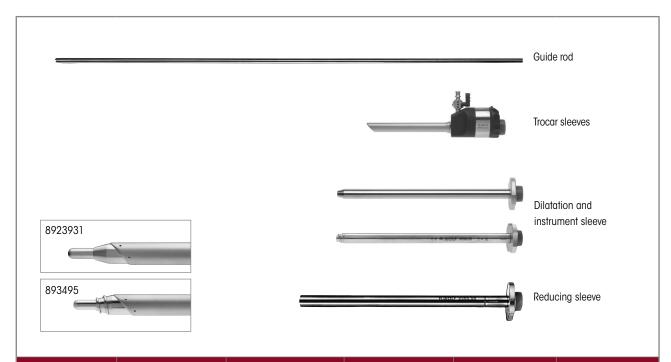


Incision widening	Guide rod	Trocar sleeve slanted	Dilatation sleeve	Instrument sleeve	Reducing sleeve
3.5 mm < 5.5 mm	-	<b>8921.013</b> capacity 5.5 mm WL 100 mm			<b>8383.78</b> Size 5 mm L 155 mm
5.5 mm < 10 mm	<b>8923.921</b> 5.5 mm TL 500 mm	8923.013	<b>8923.931</b> Size 10 mm WL 170 mm	8385.50	
5.0 mm < 10 mm	<b>8934.951</b> 5 mm TL 500 mm	capacity 10 mm WL 100 mm	<b>8934.95</b> Size 10 mm WL 172 mm	10 mm WL 170 mm	
10 mm < 12.5 mm		8924.013			<b>8941.901</b> 12 mm WL 180 mm
5.5 mm < 12.5 mm		capacity 12.5 mm WL 100 mm			<b>8941.951</b> 12 mm WL 180 mm
10 mm < 15 mm	<b>8943.901</b> 10 mm TL 500 mm				



# REDUCING SLEEVES FOR RIWO-ART TROCAR SLEEVES



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

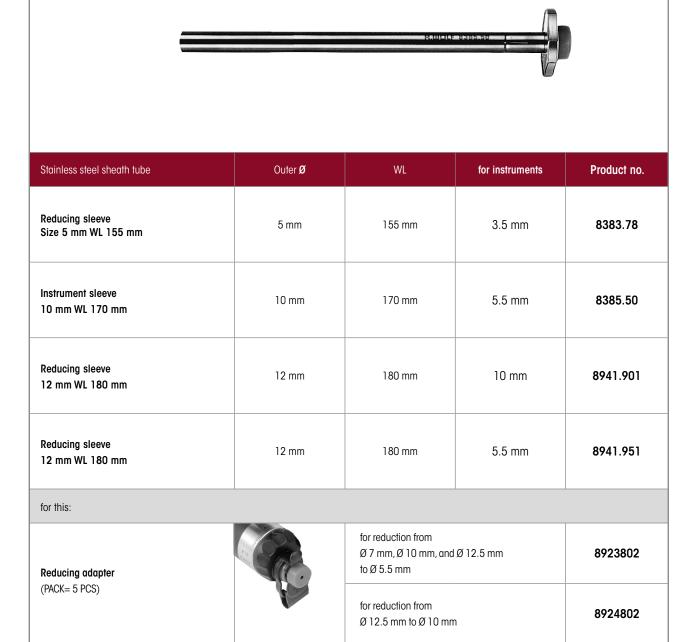


Accessories	Product no.
Sealing cap capacity 3.4–5.1 mm (PACK= 10 PCS) blue	89.02
Sealing cap capacity 9.5–10.1 mm (PACK= 10 PCS) red	8908

### **VERES CANNULAS**

#### FOR CREATION OF THE PNEUMOPERITONEUM



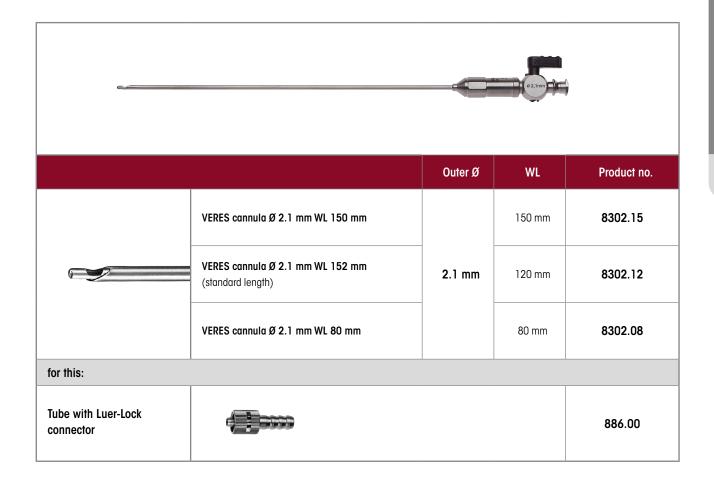

Accessories	Product no.
Stopcock insert bndl cap. 3.0 mm (PACK= 5 PCS)	896.0002






#### THE LAPAROSCOPIC TOOLBOX


#### The toolbox principle

**ERAGON modular** allows the surgeon to create their ideal laparoscopic set. Ergonomic handles, diameters relevant to all medical practice, useful working lengths, and a range of jaw sections can be combined as necessary. This universal compatibility also ensures that individual trays can comprise fewer instruments – for more efficiency and one way of cutting costs

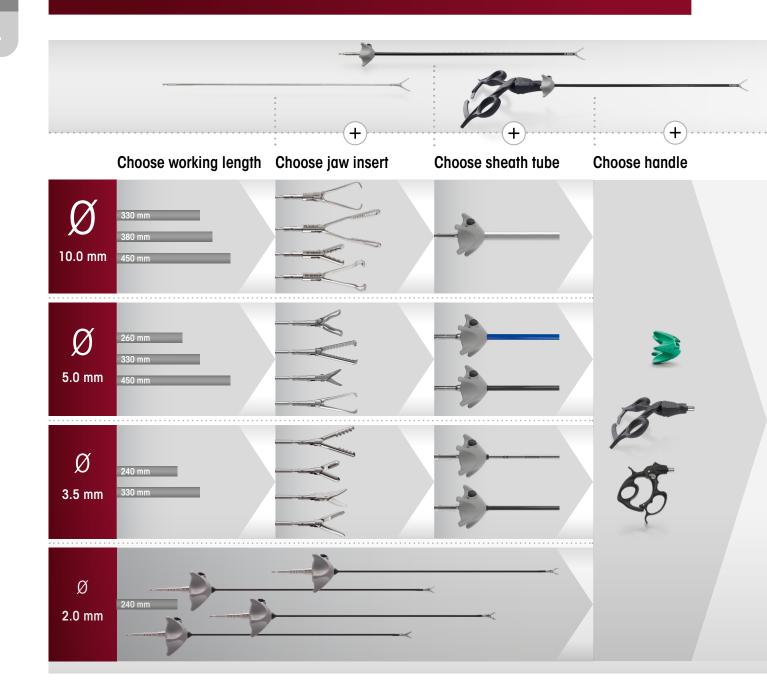





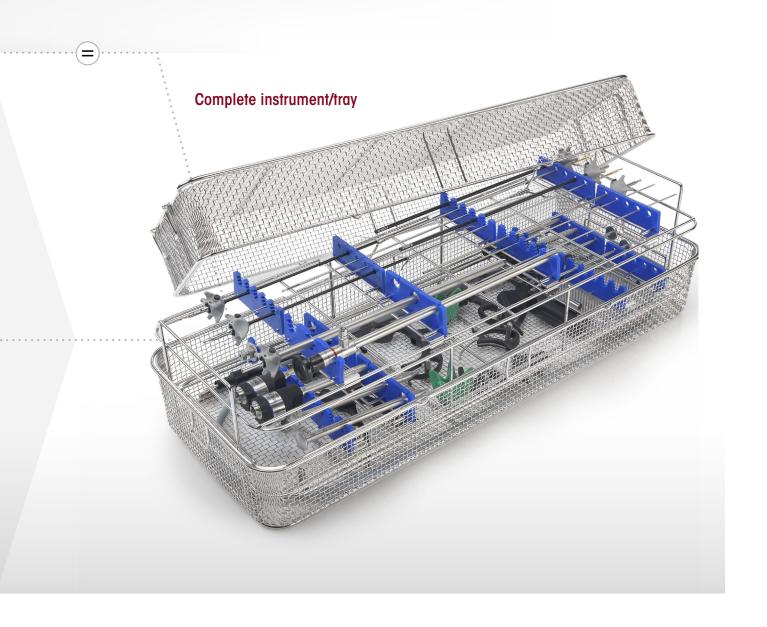

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# **ERAGON** micro Ø 2 MM, INSULATED

		Handle	e, axial
ERAGON axial			
All jaw inserts and sheath tubes can also bined with <b>ERAGONaxial</b>	be com-	without lock, with HF connector	without lock, with HF connector
Rotatable knob	Product no.	83930083	83930084
2 FILLIONS	8988	•	•

Jaw insert			Sheath tube, Ø 2.0 mm, insulated	Handle, pistol-shaped	Complete instrument
Dominic i				65	<ul> <li>Jaw insert         with sheath         tube</li> <li>Handle</li> </ul>
			WL 240 mm	without lock, with HF, mono	
	JL*	Product no.		83930073	Product no.
Scissors mono Ø 2 mm bndl  straight, double-action	7 mm	8388200	•	•	83882007
Dissector forceps mono Ø 2 mm bndl straight, double-action	7 mm	8388201	•	•	83882017
Atraumatic grasping forceps mono Ø 2 mm bndl	7 mm	8388202	•	•	83882027

 $<sup>^{*}</sup>$  JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet BDE116/117



# ERAGON micro Ø 2 MM, INSULATED

Jaw insert		Sheath tube, Ø 2.0 mm, insulated		Handle, pistol-shaped	Complete instrument
JL JL				30	Jaw insert     with sheath     tube     Handle
			WL 240 mm	with lock, with HF, mono	
	JL*	Product no.		83930074	Product no.
Grasping forceps mono Ø 2 mm bndl	7 mm	8388203	•	•	83882037

 $<sup>^{\</sup>ast}$  JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet BDE116/117

Accessories for manual and machine reprocess	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163502

# **ERAGON** minir Ø 3.5 MM, INSULATED

		Handle	e, axial
ERAGON axial			
All jaw inserts and sheath tubes can also bined with <b>ERAGONaxial</b>	be com-	without lock, with HF connector	without lock, with HF connector
Rotatable knob	Product no.	83930083	83930084
2 POOLS	8988	•	•

Jaw insert			Sheath tube, Ø 3.5 mm, insulated		Handle, pistol-shaped	Complete instrument
JL	R.W	OLF	-		8	Jaw insert with sheath tube     Handle
	<del> </del>				with lock, with HF, mono	
	JL*	Product no.	8390933	8391933	83930074	Product no.
Dissector forceps mono Ø 3.5 mm bndl	15 mm	8390207	•		•	83902077
curved to the left, double-action	10 11111	8391207		•	•	83912077
Dissector forceps mono Ø 3.5 mm bndl	18 mm	8390221	•		•	83902217
long, fine tip, double-action	10111111	8391221		•	•	83912217
Dissector forceps mono Ø 3.5 mm bndl	14 mm	8390222	•		•	83902227
short, fine tip, double-action	1411111	8391222		•	•	83912227
Dissector forceps mono Ø 3.5 mm bndl	14 mm	8390223	•		•	83902237
angled, double-action	1 - 111111	8391223		•	•	83912237

 $<sup>\</sup>ensuremath{^{*}}\ \mbox{JL} = \mbox{jaw}$  length when jaw section closed (approximate measurements)



# ERAGON modular $\emptyset$ 3.5 MM, INSULATED

Jaw insert				Sheath tube, Ø 3.5 mm, insulated		stol-shaped	Complete instrument  • Jaw insert
JL	R.WOLF					65	
			WL 240 mm	WL 330 mm	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8390933	8391933	83930073	83930074	Product no.
Metzenbaum scissors mono Ø 3.5 mm bndl	, 16 mm	8390215	•		•		83902157
double-action	10 111111	8391215		•	•		83912157
Metzenbaum scissors mono Ø 3.5 mm bndl	14 mm	8390224	•		•		83902247
fine-toothed, curved, double-action		8391224		•	•		83912247
Hook scissors mono Ø 3.5 mm bndl	0	8390227	•		•		83902277
R.WOLF single-action	8 mm	8391227		•	•		83912277
Double spoon forceps mono Ø 3.5 mm bndl	10	8390216	•			•	83902167
R.WOLF	12 mm	8391216		•		•	83912167
Friedel punch mono Ø 3.5 mm bndl	10	8390217	•			•	83902177
R.WOLF	10 mm	8391217		•		•	83912177

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocess	ing	Product no.
	Irrigation adapter Ø 9 mm, length 64 mm	163502

# **ERAGON** minir Ø 3.5 MM, UNINSULATED

		Handle, axial					
ERAGON axial							
All jaw inserts and sheath tubes can also bined with <b>ERAGONaxial</b>	All jaw inserts and sheath tubes can also be combined with <b>ERAGONaxial</b>		with lock, without HF connector, not rotatable				
Rotatable knob	Product no.	83930082	83930085				
2 PHIDIS	no. 8988						

Jaw insert	Jaw insert			e, Ø 3.5 mm, ulated	Handle, pistol-shaped	Complete instrument
JL	Ê R.W	-Us	-	-	3	<ul> <li>Jaw insert         with sheath         tube</li> <li>Handle</li> </ul>
			WL 240 mm	WL 330 mm	with lock, without HF	
	JL*	Product no.	8390933	8391933	83930072	Product no.
Atraumatic grasping forceps Ø 3.5 mm bndl	14 mm	8390208	•		•	83902087
fenestrated, double-action	14 111111	8391208		•	•	83912087
Atraumatic grasping forceps Ø 3.5 mm bndl	17 mm	8390218	•		•	83902187
fenestrated, single-action	17 111111	8391218		•	•	83912187
Atraumatic grasping forceps Ø 3.5 mm bndl	17 mm	8390225	•		•	83902257
double fenestrated, curved, single-action	17 111111	8391225		•	•	83912257
Atraumatic grasping forceps Ø 3.5 mm bndl	19 mm	8390226	•		•	83902267
fenestrated, double-action	17	8391226		•	•	83912267

 $<sup>\</sup>ensuremath{^{*}}\ \ensuremath{\mathsf{JL}}\ =\ \ensuremath{\mathsf{jaw}}\ \ensuremath{\mathsf{length}}\ \ensuremath{\mathsf{when}}\ \ensuremath{\mathsf{jaw}}\ \ensuremath{\mathsf{section}}\ \ensuremath{\mathsf{closed}}\ \ensuremath{\mathsf{(approximate measurements)}}\ \ensuremath{\mathsf{e}}$ 



# ERAGON modular

# Ø 3.5 MM, UNINSULATED

Jaw insert	Jaw insert			e, Ø 3.5 mm, ulated	Handle, pistol-shaped	Complete instrument
JL	₹ R.W	OLF.	-	-	3	Jaw insert     with sheath     tube     Handle
			WL 240 mm	WL 330 mm	with lock, without HF	
	JL*	Product no.	8390933	8391933	83930072	Product no.
Grasping forceps Ø 3.5 mm bndl	13 mm	8390219	•		•	83902197
fenestrated, double-action	1311111	8391219		•	•	83912197
Grasping forceps Ø 3.5 mm bndl	17 mm	8390220	•		•	83902207
fenestrated, single-action	17 11111	8391220		•	•	83912207
Universal grasping forceps Ø 3.5 mm bndl	14 mm	8390209	•		•	83902097
double-action	14 11111	8391209		•	•	83912097
Babcock forceps Ø 3.5 mm bndl	19 mm	8390210	•		•	83902107
double-action	17 111111	8391210		•	•	83912107

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet BDE116/117

Accessories for manual and machine reprocess	ing	Product no.
	Irrigation adapter Ø 9 mm, length 64 mm	163503

# ERAGON modular

# Ø 5.0 MM, INSULATED

			Handle, axial					
ERAGON axial		-						
All jaw inserts and sheath tubes can also be with <b>ERAGONaxial</b>	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable			
Rotatable knob	Product no.	83930082	83930083	83930084	83930085			
Z 1 FF DOLF	8988	•	•	•				

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pistol-shaped	Complete instrument
	R JL	.WOLF	-		33	• Jaw insert with sheath tube • Handle
	'		SL 330 mm	SL 450 mm	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930074	Product no.
Maryland dissector forceps mono Ø 5 mm bndl		8393.281	•		•	83932817
curved, with fine cross toothing, double-action	21 mm	8394.281		•	•	83942817
Mixter dissector forceps mono Ø 5 mm bndl  R.WOLF  angled, fine, pyramid-shaped toothing, double-action	22 mm	8393.283	•		•	83932837
Grasping forceps, mono Ø 5 mm bndl  R.WOLF  fenestrated, with fine cross toothing, 15 mm long, single-action	21 mm	8393.185	•		•	83931857
Grasping forceps, mono Ø 5 mm bndl		8393.184	•		•	83931847
fenestrated, with fine cross toothing, 20 mm long, sin- gle-action	26 mm	8394.184		•	•	83941847

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)



# ERAGON modular

# Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5.0 mm, insulated			Har	ndle, pistol-sha	ped	Complete instrument
J	R	.WOLF				ठि	8	Ø5	Jaw insert with sheath tube Handle
	—		SL 260 mm	SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8392933	8393933	8394933	83930072	83930073	83930074	Product no.
Dolphin dissector forceps mono Ø 5 mm bndl R WOLF angled, with fine cross- toothing, with channel, narrow, 15 mm long, double-action	17 mm	8393.285		•			•		83932857
Dissector forceps mono Ø 5 mm bndl R.WDLF  fine pyramid-shaped toothing, narrow, 18 mm, double-action	23 mm	8393.289		•				•	83932897
Atraumatic grasping forceps Ø 5 mm bndl  Channel with wavy tooth edge, 20 mm, single-action	26 mm	8393.292		•		•			83932925
Atraumatic grasping forceps Ø 5 mm bndl	26 mm	8393.293		•		•			83932935
Channel with wavy tooth edge, 20 mm, double-action	20 111111	8394.293			•	•			83942935
Grasping forceps, mono Ø 5 mm bndl  R.WOLF  fine, pyramid-shaped toothing, narrow double-action	19 mm	8393.288		•				•	83932887
Atraumatic grasping forceps mono Ø 5 mm bndl		8392.181	•					•	83921817
R.WOLF fenestrated,	19 mm	8393.181		•				•	83931817
with cross toothing, double-action		8394.181			•			•	83941817

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ERAGON** modular

# Ø 5.0 MM, INSULATED

			Handle, axial					
ERAGON axial		-						
All jaw inserts and sheath tubes can also be with ERAGONaxial	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable			
Rotatable knob	Product no.	83930082	83930083	83930084	83930085			
Z IFILIDIE	8988	•	•	•				

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	Complete instrument	
	R	.WOLF	-		<b>E</b>	8	• Jaw insert with sheath tube • Handle
	·		SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Atraumatic grasping forceps mono Ø 5 mm bndl	18 mm	8393.195	•			•	83931957
smooth, double-action	10 11111	8394.195		•		•	83941957
Babcock forceps Ø 5 mm bndl  R.WOLF  Gripping surface with fine cross toothing, double-action	24 mm	8393.186	•		•		83931867
Babcock forceps Ø 5 mm bndl	26 mm	8393.187	•		•		83931877
large distal gripping surface with fine cross toothing, double-action	20 111111	8394.187		•	•		83941877
Debakey forceps Ø 5 mm bndl  atraumatic clamp, double-action	39 mm	8393190	•		•		83931907

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

HF connection cable: see sheet BDFdxX6071710



# ERAGON modular

# Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
J	R.WOLF		_			8	• Jaw insert with sheath tube
			SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930074	Product no.
Debakey forceps Ø 5 mm bndl  atraumatic clamp, double-action	48 mm	8393191	•		•		83931917
Grasping forceps, mono Ø 5 mm bndl  R.WOLF  with a row of teeth, double-action	17 mm	8393.485	•			•	83934857
Grasping forceps, mono Ø 5 mm bndl  R.WOLF  with one tooth, fine cross toothing, narrow, double-action	19 mm	8393.486	•			•	83934867
Grasping forceps, mono Ø 5 mm bndl  R.Wolf  with two teeth, fine cross toothing, single-action	17 mm	8393.487	•			•	83934877
Grasping forceps Ø 5 mm bndl	0/	8393.490	•		•		83934907
with two teeth wavy gripping surface, double-action	26 mm	8394.490		•	•		83944907
Petelin dissector forceps mono Ø 5 mm bndl  R.WOLF  angled 30° to the left, with cross toothing, single-action	17 mm	8393.282	•			•	83932827

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ERAGON** modular

# Ø 5.0 MM, INSULATED

			Handle, axial					
ERAGON axial		-						
All jaw inserts and sheath tubes can also be with ERAGONaxial	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable			
Rotatable knob	Product no.	83930082	83930083	83930084	83930085			
Z IFILIDIE	8988	•	•	•				

Jaw insert			Sheath tube, Ø 5.0 mm, insulated	Handle, pistol-shaped			Complete instrument
R.WOLF				Ø,	65	Ø,	• Jaw insert with sheath tube • Handle
			SL 330 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8393933	83930072	83930073	83930074	Product no.
Plate-shaped grasping forceps mono Ø 5 mm bndl  RWOLF fenestrated with fine cross toothing, double-action	18 mm	8393.182	•				83931827
Grasping forceps mono Ø 5 mm bndl  R.WOLF  with cross toothing, double-action	21 mm	8393.183	•		•		83931837
Grasping forceps mono Ø 5 mm bndl R.WOLF  distal cross toothing with channel, double-action	15 mm	8393.287	•		•		83932877
Claw grasping forceps Ø 5 mm bndl  R.WOLF  double-action	27 mm	8393.494	•	•			83934945

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ERAGON** modular Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Har	ıdle, pistol-sha	ped	Complete instrument
),	R.WOLF				8	8	Ø5	Jaw insert with sheath tube     Handle
	_		SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	83930074	Product no.
Myoma grasping forceps Ø 5 mm bndl R.WOLF 2x3-claw, single-action	29 mm	8393.488			•			83934887
Universal grasping forceps mono Ø 5 mm bndl  R: WOLF  with pyramid-shaped toothing and cross toothing, double-action	18 mm	8393.481	•				•	83934817
Universal grasping forceps Ø 5 mm bndl  R.WOLF  pyramid-shaped toothing and cross toothing, double-action	26 mm	8393.482	•		•			83934827
Grasping forceps mono Ø 5 mm bndl  Pike-mouth, double-action	20 mm	8393.483	•				•	83934837
Biopsy forceps mono Ø 5 mm bndl		8393.091	•			•		83930917
with spikes, double-action	13 mm	8394.091		•		•		83940917
Biopsy forceps mono Ø 5 mm bndl		8393.092	•			•		83930927
severing, single-action	14 mm	8394.092		•		•		83940927

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ERAGON** modular

## Ø 5.0 MM, INSULATED

			Handle, axial				
ERAGON axial		-					
with  ERAGONaxial			without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Product no.	83930082	83930083	83930084	83930085		
Z 1 FF DOLF	8988	•	•	•			

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	Complete instrument	
R.WOLF					<b>E</b>	80	• Jaw insert with sheath tube • Handle
			SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Biopsy forceps mono Ø 5 mm bndl  R.WOLF  pointed spoon forceps, single-action	20 mm	8393.093	•			•	83930937
Knot pusher Ø 5 mm bndl R.WOLF	1.7	8393.345	•		•		83933457
with distal recess, double-action	17 mm	8394.345		•	•		83943457
Grasping forceps Ø 5 mm bndl  R:WOLF  spring jaw sections fenestrated with cross toothing, double-action	37 mm	8393.188	•		•		83931887
Grasping forceps Ø 5 mm bndl	47	8393.189	•		•		83931897
spring jaw sections fenestrated with cross toothing, double-action	47 mm	8394.189		•	•		83941897

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ER GON** modular Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
J	R.WOLF				Ø5	30	Jaw insert with sheath tube     Handle
·	·		SL 330 mm	SL450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.	8393933	8394933	83930072	83930074	Product no.
Debakey forceps Ø 5 mm bndl atraumatic, spring jaw sections with cross toothing, double-action	47 mm	8393.291	•		•		83932917
Dissector forceps mono Ø 5 mm bndl	10	8393192	•			•	83931927
angled, double-action	18 mm	8394192		•		•	83941927
Grasping forceps, mono Ø 5 mm bndl		8393193	•		•		83931937
double-action	16 mm	8394193		•	•		83941937
Dissector forceps mono Ø 5 mm bndl		8393194	•			•	83931947
double-action	24 mm	8394194		•		•	83941947
Dissector forceps mono Ø 5 mm bndl	00	8393197	•			•	83931977
double-action	30 mm	8394197		•		•	83941977
Dissector forceps mono Ø 5 mm bndl	00	8393198	•			•	83931987
fine tips double-action	33 mm	8394198		•		•	83941987

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

# **ERAGON** modular

## $\emptyset$ 5.0 MM, INSULATED

			Handle, axial				
ERAGON axial		-					
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Product no.	83930082	83930083	83930084	83930085		
S In High	8988	•	•	•			

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pistol-shaped	Complete instrument  • Jaw insert	
	JL JL				<b>TO</b>	with sheath tube • Handle	
			SL 330 mm	SL 450 mm	with lock, with HF, mono		
	JL*	Product no.	8393933	8394933	83930074	Product no.	
Dissector forceps mono Ø 5 mm bndl	20	8393199	•		•	83931997	
R.Walf  double-action	32 mm -	8394199		•	•	83941997	
Dissector forceps mono Ø 5 mm bndl	19 mm	8393200	•		•	83932007	
fine tip, double-action	19111111	8394200		•	•	83942007	
Atraumatic grasping forceps mono Ø 5 mm bndl  R.WOLF atraumatic, with cross toothing, double-action	16 mm	8393210	•		•	83932107	
Atraumatic grasping forceps mono Ø 5 mm bndl	10	8393220	•		•	83932207	
atraumatic, with cross toothing, double-action	19mm	8394220		•	•	83942207	

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)



# ERAGON modular

## Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
R.WOLF			-		Ø5	\$	• Jaw insert with sheath tube • Handle
_			SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono	
	JL*	Product no.:	8393933	8394933	83930072	83930074	Product no.:
Atraumatic grasping forceps Ø 5 mm bndl	29 mm	8393223	•		•		83932237
atraumatic, with pyramid- shaped toothing and cross toothing, double-action	27 111111	8394223		•	•		83942237
Atraumatic grasping forceps Ø 5 mm bndl	25 mm -	8393250	•		•		83932507
atraumatic, single fenestrated with cross toothing, double-action		8394250		•	•		83942507
Atraumatic grasping forceps Ø 5 mm bndl		8393229	•		•		83932297
double fenestrated and curved single-action	32 mm	8394229		•	٠		83942297
Grasping forceps Ø 5 mm bndl		8393230	•		•		83932307
atraumatic, narrow and rounded, double-action	1 15 mm	8394230		•	•		83942307
Dissector forceps mono Ø 5 mm bndl		8393240	•			•	83932407
curved, double-action	19 mm -	8394240		•		•	83942407
Dissector forceps mono Ø 5 mm bndl	17	8393242	•		•		83932427
single fenestrated double-action	17 mm	8394242		•	•		83942427

 $<sup>^*</sup>$  JL = jaw length when jaw section closed (approximate measurements)



III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# **ERAGON** modular Ø 5.0 MM, INSULATED

			Handle, axial				
ERAGON <sub>axial</sub>		-					
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable		
Rotatable knob	Product no.	83930082	83930083	83930084	83930085		
Z 1-F HOLF	8988	•	•	•			

Jaw insert	Jaw insert			Sheath tube, Ø 5.0 mm, insulated		Handle, pistol-shaped		
JL			-		8	8	Jaw insert     with     sheath     tube     Handle	
		Н	SL 330 mm	SL 450 mm	with lock, without HF	with lock, with HF, mono		
	JL*	Product no.	8393933	8394933	83930072	83930074	Product no.	
Intestine grasping forceps Ø 5 mm bndl	38 mm	8393249	•		•		83932497	
atraumatic, single fenestrated with cross toothing, double-action		8394249		•	•		83942497	
Debakey forceps mono Ø 5 mm bndl curved, double-action	35 mm	8393256	•			•	83932567	
Debakey forceps mono Ø 5 mm bndl	47 2000	8393258	•			•	83932587	
double-action	47 MM	8394258		•		•	83942587	

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements) HF connection cable: see sheet BDE116/117



# ER/GON modular

## Ø 5.0 MM, INSULATED

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pistol-shaped	Complete instrument	
Ju	G R	.WOLF	-(		65	• Jaw insert with sheath tube • Handle	
			SL 330 mm	SL 450 mm	without lock, with HF, mono		
	JL*	Product no.	8393933	8394933	83930073	Product no.	
Metzenbaum scissors mono Ø 5 mm bndl		8393.041	•		•	83930417	
curved, double-action	23 mm	8394.041		•	•	83940417	
Metzenbaum micro scissors mono Ø 5 mm bndl	18 mm	8393.044			•	83930447	
Scissors mono Ø 5 mm bndl narrow, straight, double-action	20 mm	8393.045			•	83930457	
Hook scissors mono Ø 5 mm bndl	14 mm	8393.081	•		•	83930817	
serrated, single-action		8394.081		•	•	83940817	
Metzenbaum micro scissors mono Ø 5 mm bndl		8393243	•		•	83932437	
double-action	21 mm	8394243		•	•	83942437	
Scissors mono Ø 5 mm bndl		8393246	•		•	83932467	
curved and toothed double-action	26 mm	8394246		•	•	83942467	

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

## **ERAGON** modular

## Ø 5.0 MM, INSULATED

		Handle, axial				
ERAGON axial	-	-				
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable	
Rotatable knob	Product no.	83930082	83930083	83930084	83930085	
E (F) WOLF	8988	•	•	•		

Jaw insert			Sheath tube, Ø 5	.0 mm, insulated	Handle, pis	stol-shaped	Complete instrument
JL .			-		E S	65	Jaw insert with sheath tube     Handle
		SL 330 mm	SL 450 mm	with lock, without HF	without lock, with HF, mono		
	JL*	Product no.	8393933	8394933	83930072	83930073	Product no.
Scissors mono Ø 5 mm bndl	22 mm	8393248	•			•	83932487
fine-toothed, fine tip double-action		8394248		•		•	83942487
Knot pusher Ø 5 mm bndl		8393.345	•		•		83933457
with distal recess, double-action	17 mm	8394345		•	•		83943457
Gastric band manipulator Ø 5 mm bndl	47	8393253	•		•		83932537
90° articulating with distal slot	47 mm	8394253		•	•		83942537

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocess	Product no.	
	Irrigation adapter Ø 9 mm, length 64 mm	163502

# **ERAGON** Modes Ø 5.0 MM, INSULATED

		Handle, axial
ERAGONaxial  All invariances and shooth tubes can also be combined		
All jaw inserts and sheath tubes can also be combined with ERAGONaxial		without lock, with HF connector
Rotatable knob	Product no.	83930083
2 11515	8988	•

Scissors attachme	Tensi	on rod Ø 5.0	od Ø 5.0 mm		be insulated	Ø 5.0 mm	Handle pistol-shaped	Complete instrument	
				5			8	Jaw insert with sheath tube     Handle	
		for SL 260 mm	for SL 330 mm	for SL 450 mm	SL 240 mm	SL 310 mm	SL 430 mm	without lock, rotatable with HF connector	
	Product no.	8392934	8393934	8394934	8392935	8393935	8394935	83930073	Product no.
Metzenbaum scissors attachment mono		•			•			•	83920407
4393040			•			•		•	83930407
(PACK= 10 PCS), sterile, disposable				•			•	•	83940407



# ER/GON modular

## Ø 10 MM, UNINSULATED

		Handle, axial					
ERAGON <sub>axial</sub>			S.				
All jaw inserts and sheath tubes can also bined with <b>ERAGONaxial</b>	w inserts and sheath tubes can also be com- with <b>ERAGONaxial</b>		with lock, without HF connector, not rotatable				
Rotatable knob	Product no.	83930082	83930085				
2 CHILDIS	8988	•					

Jaw insert			, Ø 10.0 mm, ulated	Handle, pistol-shaped	Complete instrument	
JL	JOLF		02	<b>\</b>	Ø5	<ul> <li>Jaw insert         with sheath         tube</li> <li>Handle</li> </ul>
			SL 327 mm	SL 447 mm	with lock, without HF	
	JL*	Product no.	8395902	8396902	83930072	Product no.
Maryland dissector forceps Ø 10 mm bndl	2/ 22	8395.225	•		•	83952257
double-action	36 mm	8396225		•	•	83962257
Dissector forceps Ø 10 mm bndl	25	8395.226	•		•	83952268
angled, double-action	35 mm	8396226		•	•	83962267
Grasping forceps Ø 10 mm bndl	20 mm	8395.236	•		•	83952368
Pike-mouth double-action	20 111111	8396236		•	•	83962367
Grasping forceps Ø 10 mm bndl	49 mm	8395.204	•		•	83952048
2/3 jaws single-action	47	8396204		•	•	83962047

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)





# **ERAGON** modular Ø 10 MM, UNINSULATED


Jaw insert		Sheath tube, Ø 10.0 mm, uninsulated		Handle, pistol-shaped		Complete instrument		
JL			102	-	<del></del>	3	• Jaw insert with sheath tube • Handle	
	—		SL 327 mm	SL 447 mm	SL 387 mm		lock, out HF	
	JL*	Product no.	8395902	8396902	8397902	83930072	83930082	Product no.
Claw grasping forceps Ø 10 mm bndl  double-action	38 mm	8395.489	•			•		83954897
Claw grasping forceps Ø 10 mm bndl with additional row of teeth, double-action	38 mm	8395490	•			•		83954907
Babcock forceps Ø 10 mm bndl	42 mm	8395.187	•			•		83951877
large distal gripping surface with fine cross toothing, double-action		8396187		•		•		83961877
Babcock forceps Ø 10 mm bndl  Researe  double-action	38 mm	8395.214	•			•		83952148
Plate-shaped grasping forceps Ø 10 mm bndl	50	8395.234	•			•		83952347
double-action	mm	8396234		•		•		83962347
Spoon forceps Ø 10 mm bndl single-action	31 mm	8395.244	•			•		83952448
Stapler head grasping forceps Ø 10 mm bndl  angled 30°, double-action		8397.655			•		•	83976558

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)/HF connection cable: see sheet BDE116/117

# **ERAGON** modular ACCESSORIES

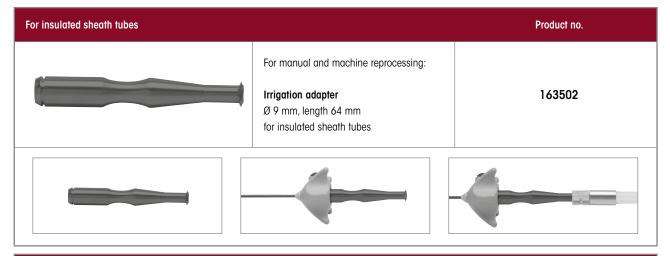

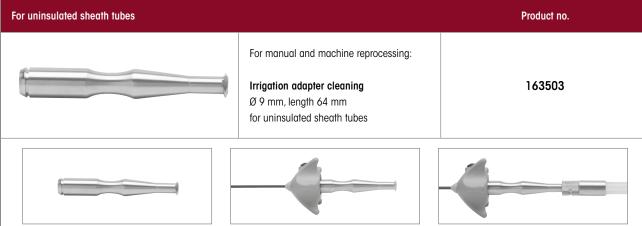

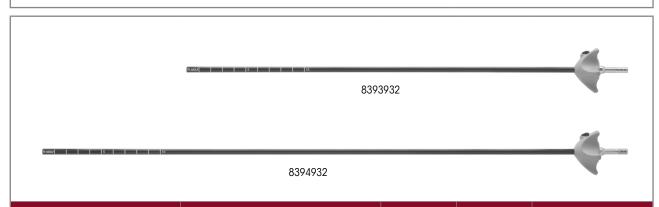

		Ø	SL	Product no.
ERAGONmodular	Sheath tube insulated Ø 5 mm SL 330 mm with distal cm scale	5 mm	330 mm	8393932
R WOLF	Sheath tube insulated Ø 5 mm SL 450 mm with distal cm scale	5 mm	450 mm	8394932



## HANDLE VARIANTS FOR MODULAR SYSTEMS

spirit of excellence

Handle, pistol-shaped	rotatable	with lock	without lock	with HF	without HF	Product no.	
3	•	•			•	83930072	
65	•		•	•		83930073	
3	•	•		•		83930074	
Handle, axial FRAGON axial	rotatable	with lock	without lock	with HF	without HF	Product no.	
	•	•			•	83930082	
	•		•	•		83930083	
	•	•		•		83930084	
		•			•	83930085	
Optional for 83930082/83930083/83930084: Product no.							

All ERAGON modular components are compatible with ERAGON axial

Rotatable knob

autoclavable


ER/GON axial

8988



III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# CHOLANGIOGRAPHY CATHETERGRASPING FORCEPS 5 MM

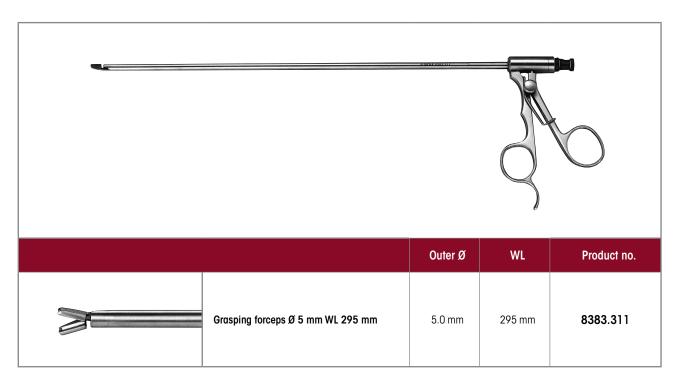


For inserting a cholangiography catheter up to 7 Fr into the cystic duct



#### BIPOLAR FORCEPS 3.5 MM/5.0 MM

WITH SPRING HANDLE MODULAR SYSTEM

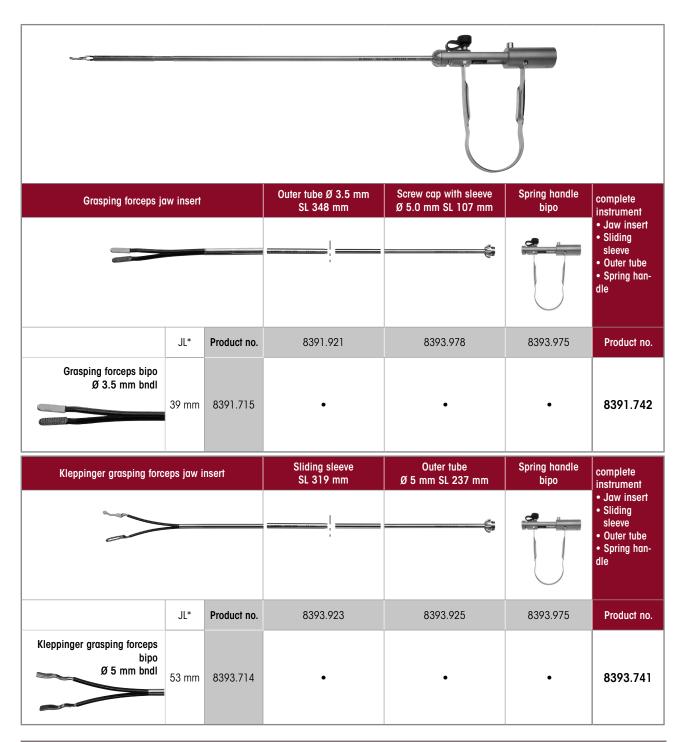

Accessories	Product no.
RIWO rubber cap, jet black	15220.019
Luer sealing cap	15023.153

 $<sup>^{*}</sup>$  JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet BDE118/119




||1123 || Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

## ERAGON bipolar

# MODULAR BIPOLAR INSTRUMENTS, 5.5 MM ROTATABLE

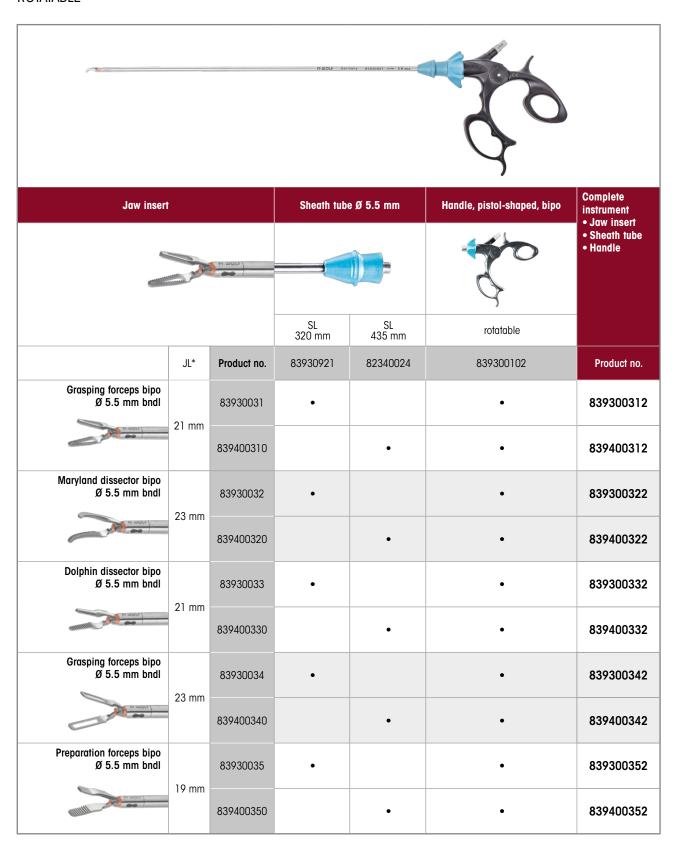

 $<sup>^{*}</sup>$  JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet BDE118/119


## **ERAGON**bipolar

# MODULAR BIPOLAR INSTRUMENTS, 5.5 MM,

#### **ROTATABLE**

III123 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

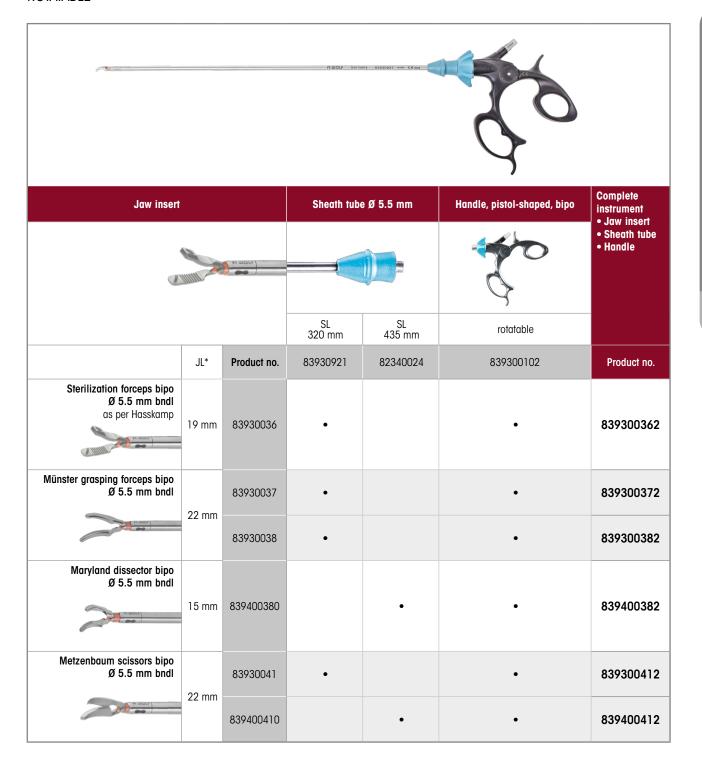


<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements) Bipolar connection cable: see sheet BDE118/119



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.


## ELECTRODES 2.0 MM/3.5 MM

MONOPOLAR

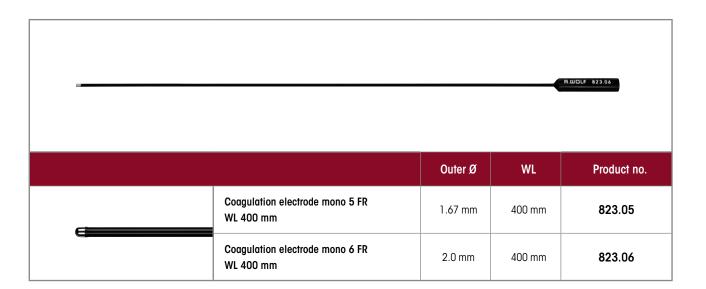

			8379.452
	Outer Ø	WL	Product no.
Hook electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.452
Hook electrode mono Ø 3.5 mm  WL 240 mm  with distally extended insulation	3.5 mm	240 mm	8785.642
Needle electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.482
Coagulation electrode mono Ø 3.5 mm WL 310 mm	3.5 mm	310 mm	8379.462

# ELECTRODES 5.0 MM MONOPOLAR

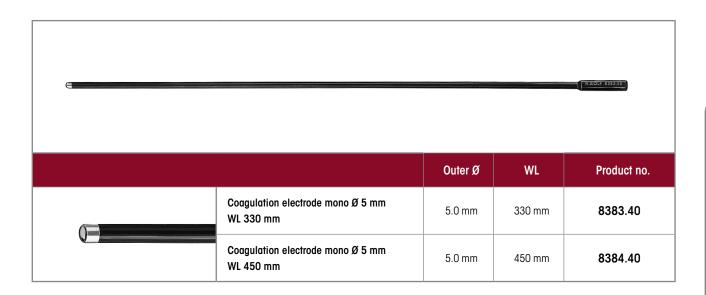


			(8583.423)
	Outer Ø	WL	Product no.
Hook electrode mono Ø 5 mm WL 340 mm	F 0	340 mm	8383.423
Hook electrode mono Ø 5 mm WL 420 mm	5.0 mm	420 mm	8384.423
Needle electrode mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383.426
Spatula electrode mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383.428
Myoma dissector mono Ø 5 mm WL 340 mm	5.0 mm	340 mm	8383429



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

#### **COMBINATION OPTIONS**

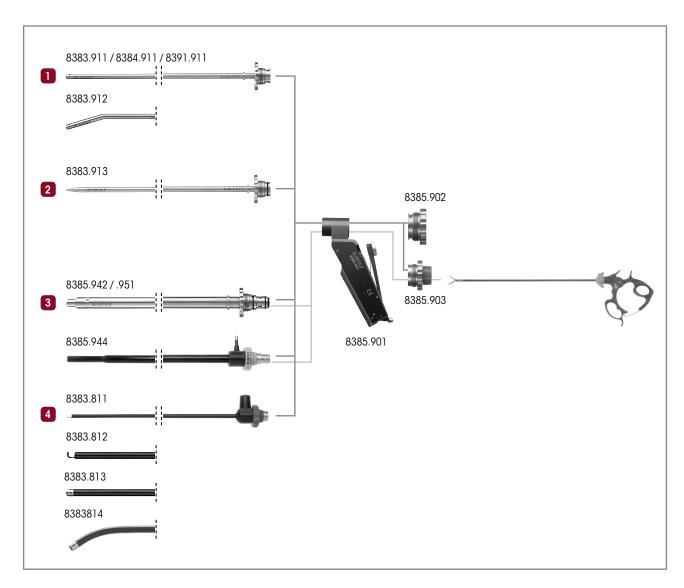

#### Suction or irrigation:

Suction irrigation tube Ø 5 mm WL 310 mm	8383.911
Suction irrigation tube Ø 5 mm WL 450 mm	8384.911
Suction irrigation tube Ø 3.5 mm WL 300 mm	8391.911
Suction irrigation tube curved Ø 5 mm WL 310 mm	8383.912
for this: Sealing cap	8385.902

#### 2 Blunt aquadissection:

Pressure irrigation tube Ø 5 mm WL 310 mm8383.913for this: Sealing cap8385.902

#### 3 Suction, irrigation, and use

#### of auxiliary instruments Ø 5 mm

of duxiliary instruments & 3 min.	
Suction irrigation tube Ø 10 mm WL 225 mm	8385.942
Suction irrigation tube Ø 10 mm WL 330 mm	8385951
Suction irrigation tube Ø mono 10 mm WL 330 mm,	
insulated, with atraumatic preparation tip $\hdots \dots \dots \dots$	8385.944
for this: <b>Sealing adapter</b>	8385.903


#### Preparation of tissue with HF:

HF suction irrigation tube Ø 5.2 mm WL 317 mm
insulated with integrated HF spatula probe
HF suction irrigation tube Ø 5.2 mm WL 317 mm
insulated with integrated HF hook electrode
HF suction irrigation tube Ø 5.2 mm WL 317 mm
insulated with integrated HF button electrode 8383.813
HF suction irrigation tube Ø 5.4 mm WL 380 mm
curved with distal openings,
insulated with integrated HF button electrode8383.814
for this: <b>Sealing cap</b>



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM


#### SUCTION IRRIGATION HANDLE

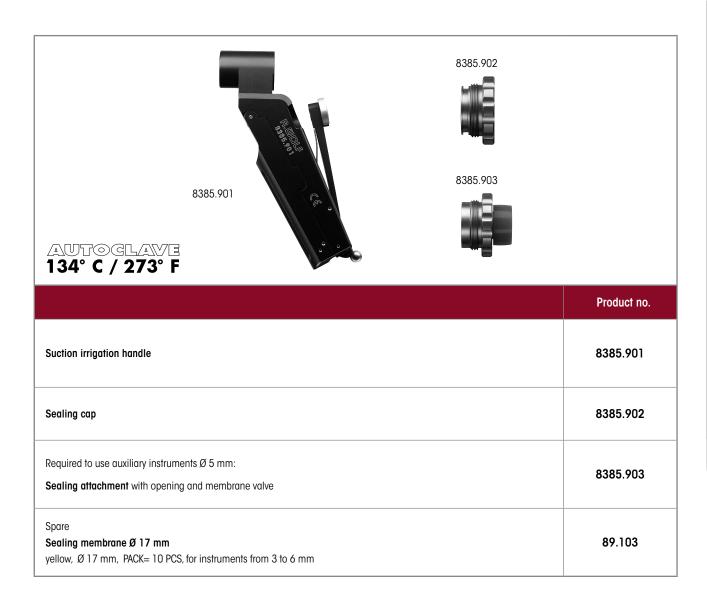



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

#### SUCTION IRRIGATION TUBE SETS - ILLUSTRATION

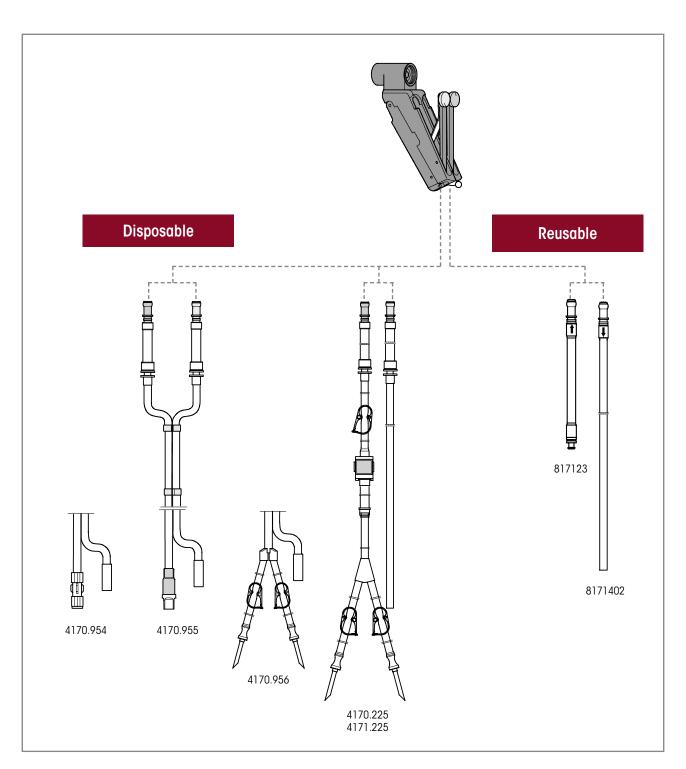

**Suction irrigation tube sets** are used in conjunction with the suction irrigation handle 8385.901 and pump-side tube systems as well as corresponding collection and secretion containers and/or vacuum pumps (e.g., FLUID CONTROL LAP 2216, LAPARO PUMP 2215)

III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.



## MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

#### SUCTION IRRIGATION TUBE SETS FOR SUCTION IRRIGATION HANDLE 8385.901


Disposable		Product no.
Suction irrigation tube set, L 3 m  (PACK= 10 PCS), sterile	Irrigation tube: With Luer-Lock, for connection to the irrigation tube of a suction irrigation tube set, e.g., irrigation tube of the Endo-Irrigator 2211 Suction tube: For connection to a collection or secretion container and/or vacuum pump	4170.954
Suction irrigation tube set with care-lock, L 3 m  (PACK= 10 PCS), sterile	Irrigation tube: With CARE-LOCK, for connection to an irrigation container Suction tube: For connection to a collection or secretion container and/or vacuum pump	4170.955
Suction irrigation tube set with piercing spike, L 3 m  (PACK= 10 PCS), sterile	Irrigation tube: With 2 piercing spikes, for connection to an irrigation container Suction tube: For connection to a collection or secretion container and/or vacuum pump	4170.956
Suction irrigation tube set with piercing spike, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With 2 piercing spikes, for connection to an irrigation container, plus Laparo Pump 2215 and Fluid Control Lap 2216 Suction tube: For connection to a collection or secretion container and/or vacuum pump Also observe instruction manual GA-A 167	4170.225
Suction irrigation tube set, L 3 m (PACK= 10 PCS), sterile	Irrigation tube: With 2 piercing spikes, for connection to an irrigation container, and Fluid Control Lap 2216 Suction tube: For connection to a collection or secretion container and/or vacuum pump  Also observe instruction manual GA-A 276	4171.225
Secretion container, 2.5 I	2.5 liters	41706566
Tube set for suction (2 connections)	sterile disposable product (PACK= 10 PCS), for connecting instruments to collecting container	T0503-01

Reusable		Product no.
Irrigation tube L 1.2 m	Irrigation tube: With Luer-Lockconnection for connection to the irrigation tube of a suction irrigation tube set, e.g., 8171223 or 8170.223	817123
Suction tube L 3 m	silicone, for suction irrigation handle 8385.901	8171402
Secretion container, 2 I	2 liters, with lid	8170.655
Secretion container, 2 I	2 liters, no lid	8170.6551



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM


#### SUCTION IRRIGATION TUBES

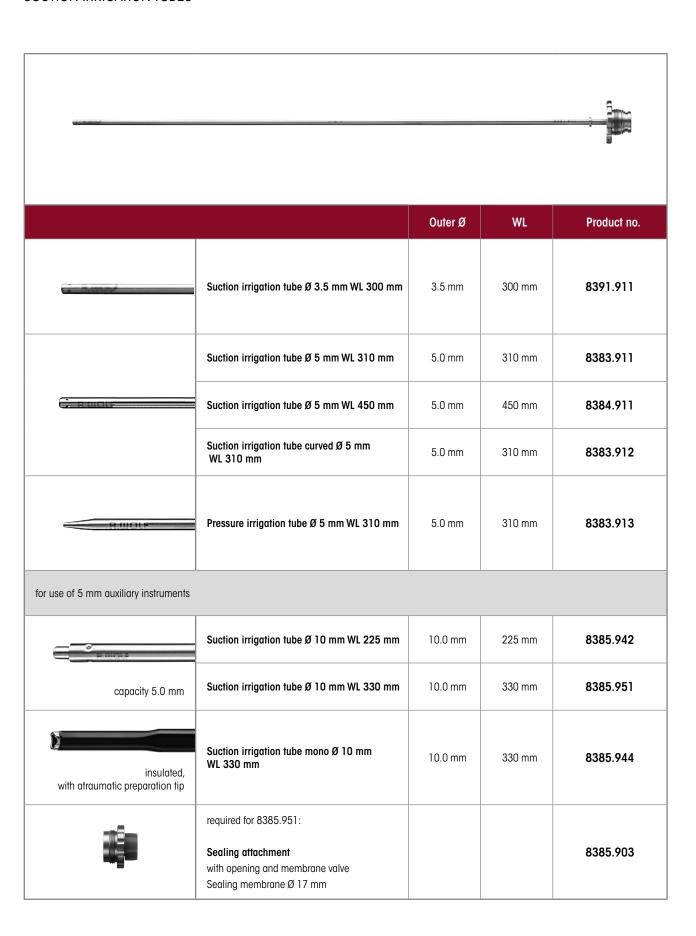



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

#### **SUCTION IRRIGATION TUBES**

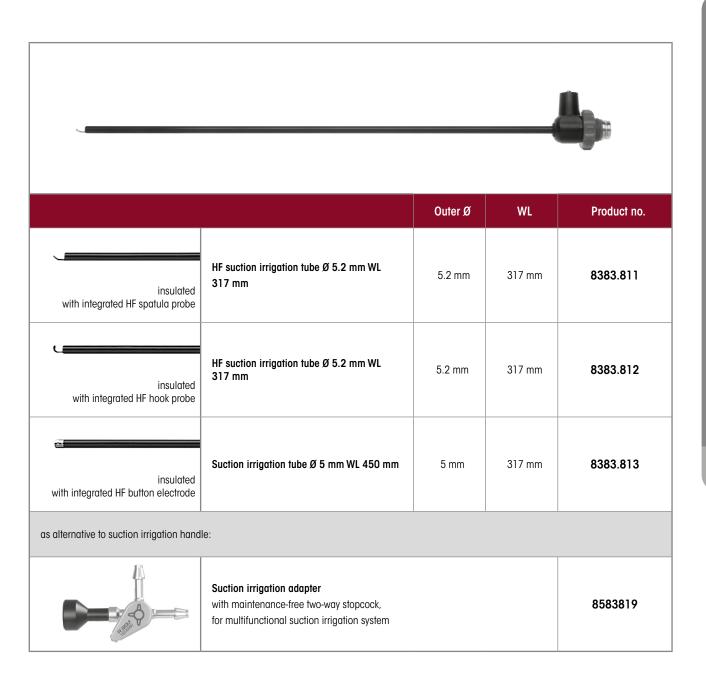


Accessories	Product no.
HF connection cable	See page BDE116/117



#### MULTIFUNCTIONAL SUCTION IRRIGATION SYSTEM

#### SUCTION IRRIGATION TUBES

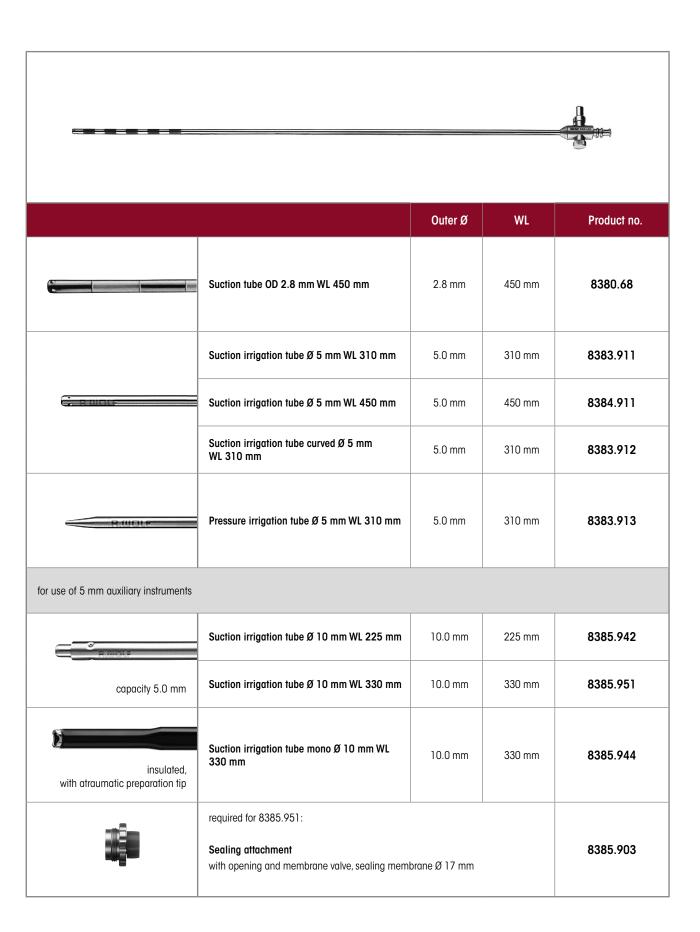




#### **ACCESSORIES**

III23 || Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with

your contact partner or directly with Richard Wolf GmbH.

#### FOR SUCTION AND IRRIGATION

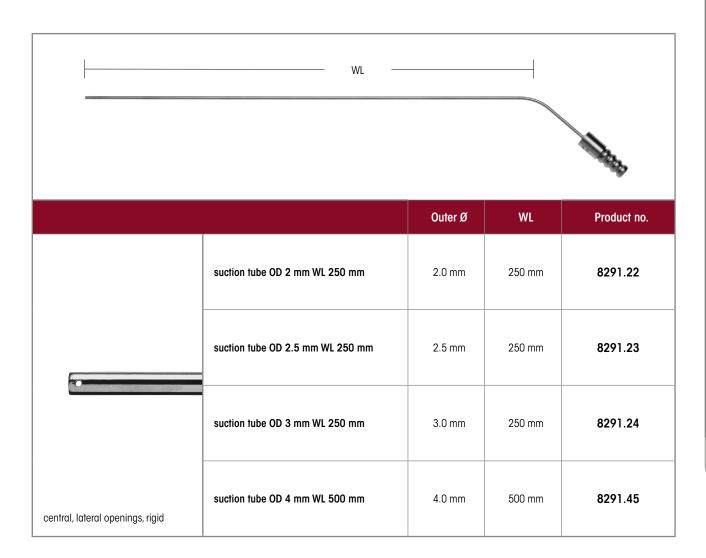

<del></del>				100 ( SALE) 199
		Outer Ø	WL	Product no.
	Suction tube OD 2.8 mm WL 450 mm	2.8 mm	450 mm	8380.68




III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

#### **ACCESSORIES**

#### FOR SUCTION AND IRRIGATION



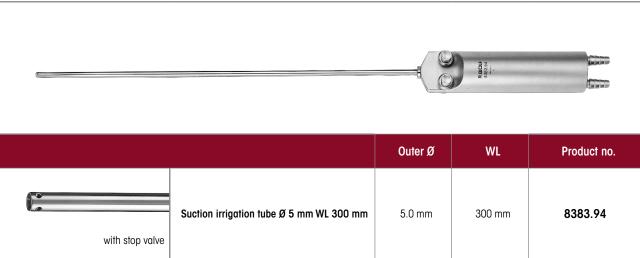


•			<b></b>	
		Outer Ø	WL	Product no.
	Suction irrigation tube WL 290 mm	5.0 mm	290 mm	8583732
with maintenance-free two-way stopcock, sheath tube, with distal openings, reusable	Suction irrigation tube WL 410 mm	5.0 mm	410 mm	8584732






#### ACCESSORIES / DISPOSABLE HAND BLOWER

FOR SUCTION AND IRRIGATION

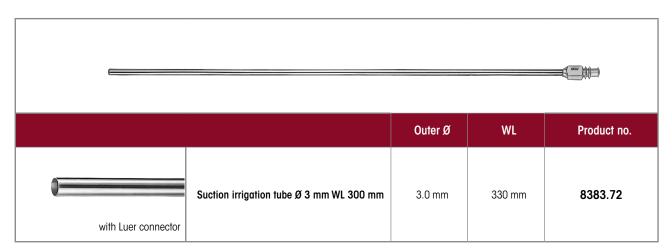


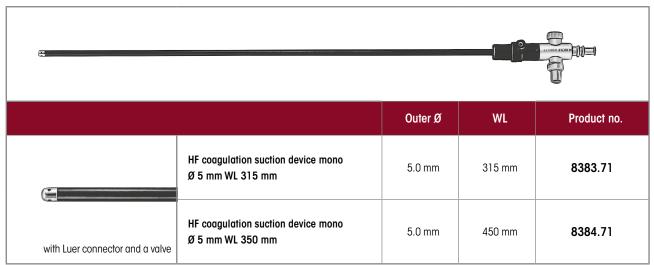

for air insufflation	for air insufflation			Product no.
	<b>Hand blower</b> with disposable filter, sterile (PACK= 5 PCS)	49 mm	567 mm	412700

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

## TISSUE RETRACTOR 5 MM

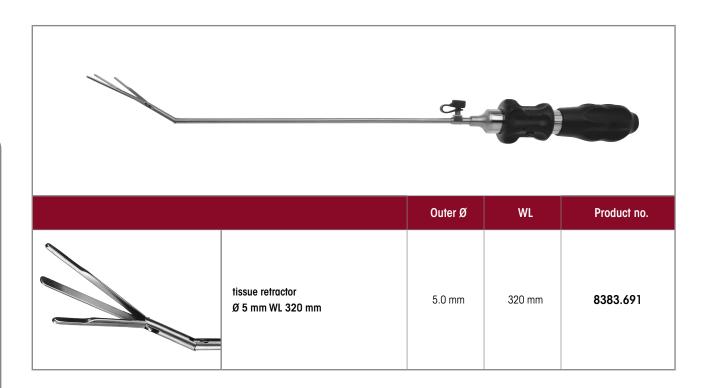


Accessories	Product no.
Luer sealing cap	887.00



#### CLIP APPLICATOR 10 MM

#### FOR SUCTION AND IRRIGATION

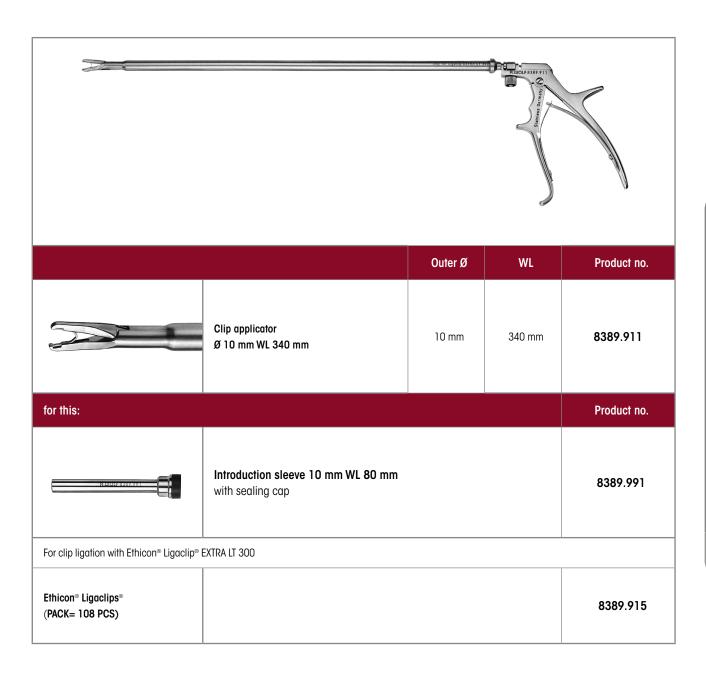


Accessories	Product no.
Sealing cap capacity 9.5–10.1 mm	89.08





#### THE ERGONOMIC GENERATION OF NEEDLE HOLDERS

Thanks to the custom combination options it offers, **ERAGONstitch** can accommodate any user requirement. The way in which it brings together ergonomics, versatility, modularity, and precision sets new standards in comfort

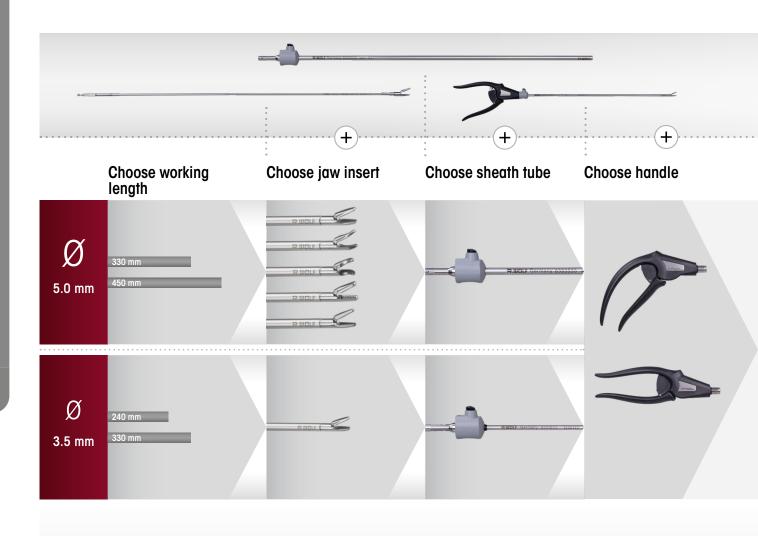








# ERAGON stitch NEEDLE HOLDER Ø 3.5 MM

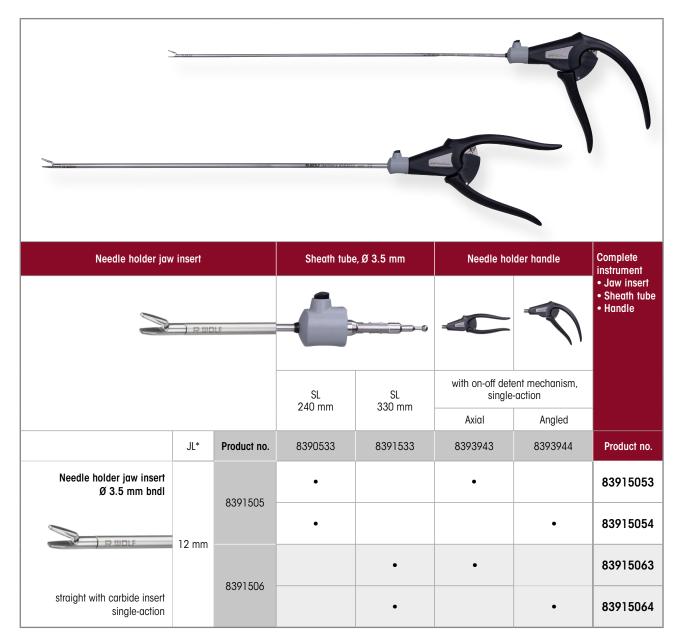

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocessing	Product no.	
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503



# ERAGON stitch NEEDLE HOLDER Ø 5.0 MM

Needle holder jaw	Needle holder jaw insert			e, Ø 5.0 mm	Needle ho	lder handle	Complete instrument		
				) <u> </u>			<ul><li>Jaw insert</li><li>Sheath tube</li><li>Handle</li></ul>		
			SL SL	with on-off det	with on-off detent mechanism, single-action				
			330 mm	450 mm	axial	angled			
	JL*	Product no.	8393533	8394533	8393943	8393944	Product no.		
Needle holder Ø 5 mm bndl		8303507	•		•		83935073		
RUDLE	19 mm	8393507	•			•	83935074		
	17111111	8394507		•	•		83945073		
straight with carbide insert single-action		6394307		•		•	83945074		
Needle holder Ø 5 mm bndl		9202509	•		•		83935083		
RUDLE	10	8393508	•			•	83935084		
straight and narrow with carbide	19 mm	8394508		•	•		83945083		
insert single-action		0074000		•		•	83945084		
Needle holder jaw insert Ø 5 mm bndl		8393509	•		•		83935093		
			•			•	83935094		
straight,	19 mm	8394509		•	•		83945093		
with self-righting function single-action		0074009		•		•	83945094		

<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)

Accessories for manual and machine reprocessing	Product no.		
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503	



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# ERAGON stitch NEEDLE HOLDER Ø 5.0 MM


Needle holder jaw insert		Sheath tube, Ø 5.0 mm		Needle holder handle		Complete instrument	
R.WOLF						Jaw insert     Sheath     tube     Handle	
		SL 330 mm	SL 450 mm	with on-off detent mechanism, single-action			
				Axial	Angled		
	JL*	Product no.	8393533	8394533	8393943	8393944	Product no.
		8393518	•		•		83935183
	19 mm		•			•	83935184
		8394518		•	•		83945183
curved right with carbide insert single-action				•		•	83945184
Needle holder Ø 5 mm bndl	19 mm	8393519	•		•		83935193
RWOLF			•			•	83935194
		8394519		•	•		83945193
Curved left with carbide insert single-action				•		•	83945194

Accessories for manual and machine reprocessing	Product no.	
	Irrigation adapter cleaning Ø 9 mm, length 64 mm for uninsulated sheath tubes	163503



## NEEDLE HOLDER Ø 3.5 MM/5 MM

### **MODULAR SYSTEM**

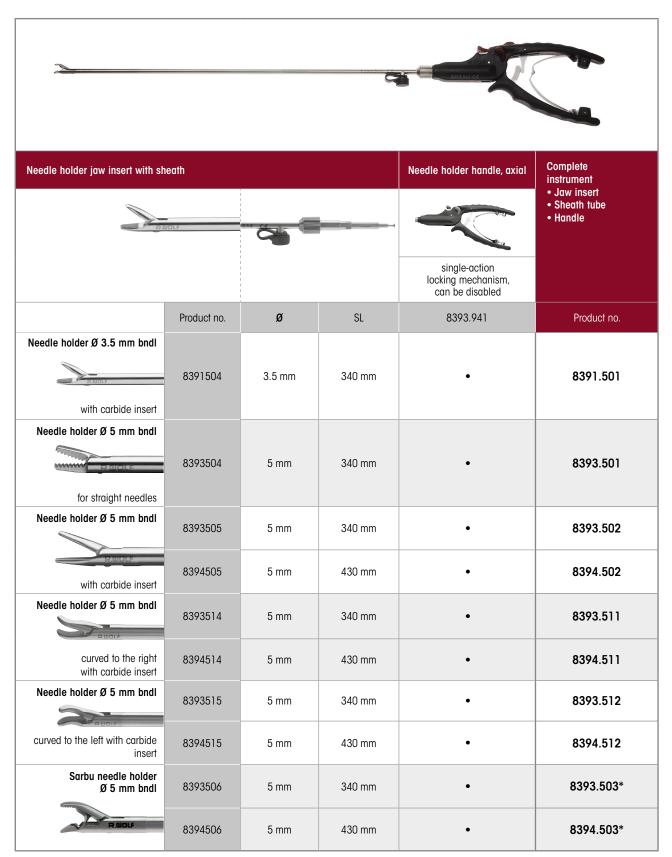

<sup>\*</sup> with automatic needle placement apparatus and cutting edge

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# NEEDLE HOLDER HANDLE

Needle holder handle, axial	not rotatable	with lock	without HF	Product no.
	•	•	•	8393.941

Needle holder handle ÆRAGONstitch	axial	angled	with on-off detent mechanism	single-action	Not rotatable	Product no.
	•		•	•	•	8393943
		•	•	٠	•	8393944





# MODULAR KNOT PUSHER Ø 5.0 MM, INSULATED

		Handle, axial				
ERAGON axial		-	The state of the s	S.	3	
All jaw inserts and sheath tubes can also be with <b>ERAGONaxial</b>	combined	with lock	without lock, with HF connector	without lock, with HF connector	with lock, not rotatable	
Rotatable knob	Product no.	83930082	83930083	83930084	83930085	
2 Patricular	8988	•	•	•	•	

Jaw insert		Sheath tube, Ø 5	.0 mm, insulated	Handle	Complete instrument	
ERAGON modular  R.WOLF				<b>B</b>	• Jaw insert with sheath tube • Handle	
	,		SL 330 mm	SL 450 mm	with lock, without HF	
	JL*	Product no.	8393933	8394933	83930072	Product no.
Knot pusher Ø 5 mm bndl	17 mm	8393.345	•		•	83933457
with distal recess, double-action	17 mm	8394345		•	•	83943457


<sup>\*</sup> JL = jaw length when jaw section closed (approximate measurements)
HF connection cable: see sheet BDE116/117

# 

spirit of excellence

III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# KNOT PUSHER 5 MM FOR ENDOSCOPIC SUTURING

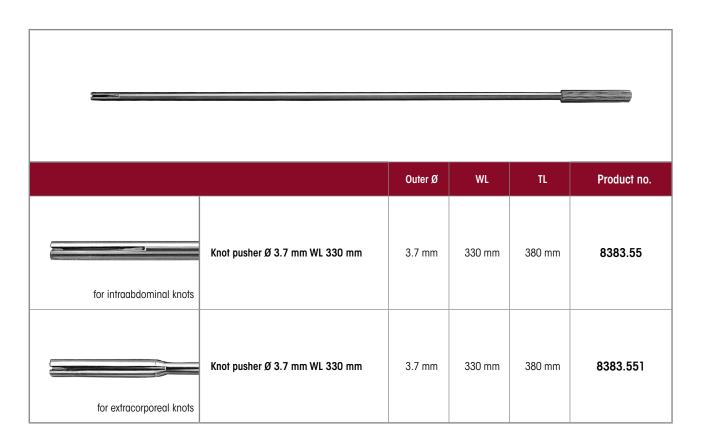

				-	
		Outer Ø	WL	TL	Product no.
with distal notch and lateral opening for optimum knotting, extremely atrau- matic tip for use as a surgical probe	Knot pusher Ø 5 mm WL 330 mm as per Bueß	5.0 mm	330 mm	380 mm	8383.552




# Endoscopically controlled fascia closure system AS PER BUSCHE




# 

spirit of excellence

## CANNULAS 3.0 MM/4.7 MM

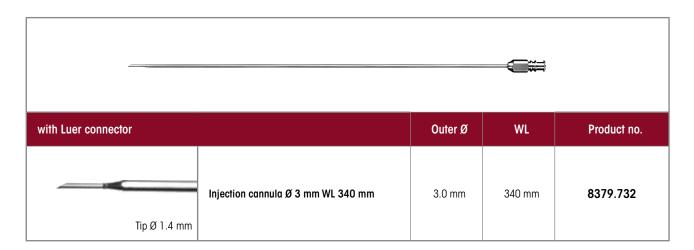

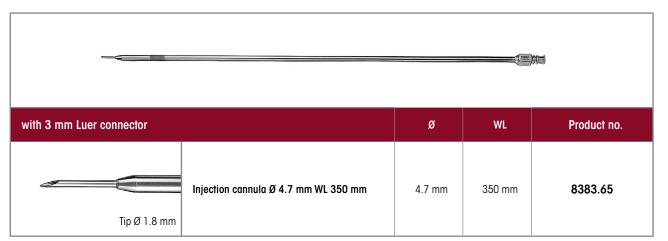

<b>← </b>			-	
with suction regulator and 4 mm	Luer connector	ø	WL	Product no.
	Puncture cannula Ø 4.7 mm WL 320 mm	4.7 mm	320 mm	8383.49
Tip Ø 1.8 mm				


for this:		WL	Product no.
E E	Introduction sleeve size 5.5 mm WL 45 mm  This sleeve prevents damage to the cannula tip when the trocar	45 mm	8383.00
	sleeve valve is opened		

# **SURGICAL PROBES**

	Ø	WL	Product no.
Surgical probe 3.5 mm WL 350 mm graduated	3.5 mm	350 mm	8379.672

ARDV 1984				ABOU 1924
		Ø	WL	Product no.
	Surgical probe Ø 5 mm WL 328 mm graduated	5.0 mm	328 mm	8383.66
	Surgical probe Ø 5 mm WL 448 mm graduated	5.0 mm	448 mm	8384.66

# MYOMA DRILL 5 MM/10 MM

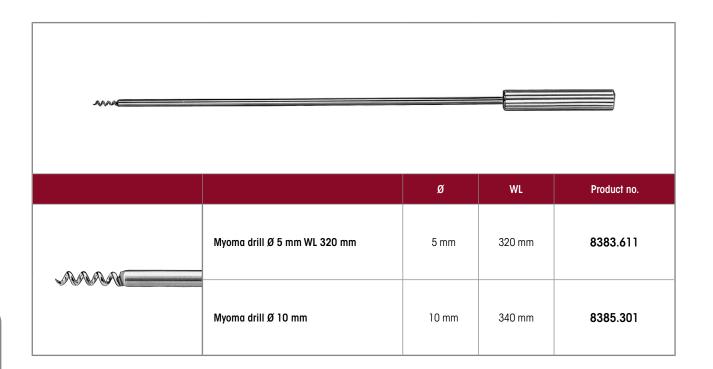



# INSUFFLATOR HIGHFLOW 45 BASIC



		Product no.
nsufflator 45 BASIC bndl		
consisting of:		
Insufflator 45 BASIC FR 45 I/min (2235001),		22350011
Insufflation tube set L 2.5 m (8170.101), Hygiene filter, sterile, disposable (PACK= 10 PCS) (4171.111)		
and power cable 3 m long (2440.03)		
Accessories: Tube sets for insufflation		
Insufflation tube set L 2.5 m, High Flow, D = 8 mm, autoclavable		8170.232
Insufflation tube set L 2.5 m, autoclavable		8170.101
<b>Insufflation tube set L 2.7 m</b> , with integrated hygiene filter, disposable, (PACK= 10 P	PCS) in individual sterile packaging	4170.501
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		
Accessories for gas supply		
CO, connection tube 1.5 m NIST-NIST		74021038
with		
Pressure reducer for CO <sub>2</sub> connector DIN 477-1	DIN 477-1	74007054
Pressure reducer for CO <sub>2</sub> connector DIN EN ISO 407	DIN EN ISO 407	74007055
Pressure reducer for CO <sub>2</sub> connector ISO 5145	ISO 5145	74007056
or		
Connection tube for ${ m CO_2}$ 5.0 m DIN for centralized ${ m CO_2}$ gas supply (Dräger)		
Connection tube for CO <sub>2</sub> 5.0 m NF for centralized CO <sub>2</sub> gas supply (Liquid Air)		
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		
Software module BABY MODE BABY MODE for special use in pediatrics		
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus	2235103	

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA

## INSUFFLATOR HIGHFLOW 45 BASIC

Insufflator 45 BASIC	2235001
Device properties	
Operating mode	Continuous operation
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100–240 V~, 50/60 Hz
Power consumption	60 VA
Current rating	0.6-0.2 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	8.9 kg (19.5 lbs)
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm

Relevant application parameters		
Insufflation medium	Medical-grade CO <sub>2</sub> (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0   to 9,999   (± 20%)	

# **INSUFFLATOR HIGHFLOW 45 EVAC**

### WITH SMOKE GAS EVACUATION



		Product no.
Insufflator 45 EVAC bndl consisting of: Insufflator 45 EVAC FR 45 I/min (2235011), Insufflation tube set L 2.5 m (8170.101), Hygiene filter, sterile, disposable (PACK= 10 PCS) (4171.111), Insufflation tube set L 2.7 m with integrated hygiene filter, sterile, disposable (PACK= 10 PCS) (4170.501) Smoke gas evacuation tube set L 2.7 m, sterile, disposable (PACK= 10 PCS) (4170503) Footswitch with 1 pedal (20301031) and power cable, 3 m long (2440.03)		22350111
Accessories: Tube sets for insufflation		
Smoke gas evacuation tube set L 2.7 m, sterile, disposable (PACK= 10 PCS)		4170503
Accessories for gas supply		
CO <sub>2</sub> connection tube 1.5 m NIST-NIST		74021038
with		
Pressure reducer for CO <sub>2</sub> connector DIN 477-1	DIN 477-1	74007054
Pressure reducer for CO <sub>2</sub> connector DIN EN ISO 407	DIN EN ISO 407	74007055
Pressure reducer for CO <sub>2</sub> connector ISO 5145	ISO 5145	74007056
or		
Connection tube for CO <sub>2</sub> 5.0 m DIN for centralized CO <sub>2</sub> gas supply (Dräger)		74021039
Connection tube for CO <sub>2</sub> 5.0 m NF for centralized CO <sub>2</sub> gas supply (Liquid Air)		74021040
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		2235101
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA

## INSUFFLATOR HIGHFLOW 45 EVAC

Insufflator 45 EVAC	2235011	
Device properties		
Operating mode	Continuous operation	
Operating conditions	$+10^{\circ}\text{C}$ to $+40^{\circ}\text{C}$ , 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa	
Power supply		
Mains + frequency	100–240 V~, 50/60 Hz	
Power consumption	60 VA	
Current rating	0.6-0.2 A	
Fuse	T 3.15 AH 250 V	
Regulatory standards		
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	1	
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2	
Medical Devices Directive 93/42/EEC	Class IIb	
Protection against electric shock	Type CF applied part	
Degree of protection against the ingress of liquids	IP 20 (not protected)	
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)	
Dimensions and weights		
Weight	8.9 kg (19.5 lbs)	
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm	

Relevant application parameters		
Insufflation medium	Medical-grade CO <sub>2</sub> (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0 I to 9,999 I (± 20%)	



# INSUFFLATOR HIGHFLOW 45 HEAT

### WITH GAS HEATING



		Product no.
Insufflator 45 HEAT bndI consisting of: Insufflator 45 HEAT FR 45 L/min(2235021), Insufflation tube for 2235021/031 L 3 m (8170202) Hygiene filter, sterile, disposable (PACK= 10 PCS) (4171.111) and power cable 3 m long (2440.03)		22350211
Accessories: Tube sets for insufflation		
Insufflation tube set L 3 m Highflow, with heating wire and integrated hygiene filter, sterile, disposable, (PACK= 10 PCS) in individual sterile packaging		4170502
<b>Insufflation tube for 2235021/031 L 3 m</b> Highflow, with heating wire, autoclavable, 3.0 m  The reusable tube can be used up to 100 times		8170202
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Accessories for gas supply		
CO, connection tube 1.5 m NIST-NIST		74021038
with		
Pressure reducer for CO <sub>2</sub> connector DIN 477-1	DIN 477-1	74007054
Pressure reducer for CO <sub>2</sub> connector DIN EN ISO 407	DIN EN ISO 407	74007055
Pressure reducer for CO <sub>2</sub> connector ISO 5145	ISO 5145	74007056
or		
Connection tube for ${\rm CO_2}$ 5.0 m DIN for centralized ${\rm CO_2}$ gas supply (Dräger)		74021039
Connection tube for CO <sub>2</sub> 5.0 m NF for centralized CO <sub>2</sub> gas supply (Liquid Air)		74021040
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		2235101
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA

## **INSUFFLATOR HIGHFLOW 45 HEAT**

Insufflator 45 HEAT	2235021
Device properties	
Operating mode	Continuous operation
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100-127/220-240 V~, 50/60 Hz
Power consumption	80 VA
Current rating	0.8-0.3 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	I
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	11.0 kg (23.3 lbs)
Dimensions (W x H x D)	300 mm x 160 mm x 455 mm

Relevant application parameters	
Insufflation medium	Medical-grade CO <sub>2</sub> (degree of purity > 99.5%)
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg
Gas flow rate primary filling	1 I/min (± 50%)
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min
Consumption indicator	0   to 9,999   (± 20%)



# INSUFFLATOR HIGHFLOW 45 EVAC + HEAT

### WITH SMOKE GAS EVACUATION AND GAS HEATING



		Product no.
Insufflator 45 EVAC + HEAT bndl consisting of: Insufflator 45 EVAC + HEAT FR 45 I/min(2235031), Insufflation tube for 2235021/031 L 3 m (8170202), Insufflation tube set L 3 m, sterile, disposable, (PACK= 10 PCS) (4170502), Insufflation tube set L 2 m, sterile, disposable, (PACK= 10 PCS) (4170502), Insufflation tube set L 2.7 m, sterile, disposable (PACK= 10 PCS) (4170503) Footswitch 1 pedal (20301031) and power cable 3 m long (2440.03)		22350311
Accessories: Tube sets for insufflation		
<b>Insufflation tube set L 3 m</b> Highflow, with heating wire and integrated hygiene filter, sterile, disposable, (PACK= 10 PCS) in individual sterile packaging		4170502
<b>Insufflation tube for 2235021/031 L 3 m</b> Highflow, with heating wire, autoclavable, 3.0 m  The reusable tube can be used up to 100 times		8170202
Hygiene filter, sterile, disposable (PACK= 10 PCS) in individual sterile packaging		4171.111
Smoke gas evacuation tube set L 2.7 m, sterile, disposable (PACK= 10 PCS)		4170503
Accessories for gas supply		
CO, connection tube 1.5 m NIST-NIST		74021038
with	,	
Pressure reducer for CO <sub>2</sub> connector DIN 477-1	DIN 477-1	74007054
Pressure reducer for CO <sub>2</sub> connector DIN EN ISO 407	DIN EN ISO 407	74007055
Pressure reducer for CO <sub>2</sub> connector ISO 5145	ISO 5145	74007056
or		
Connection tube for CO <sub>2</sub> 5.0 m DIN for centralized CO <sub>2</sub> gas supply (Dräger)		74021039
Connection tube for CO <sub>2</sub> 5.0 m NF for centralized CO <sub>2</sub> gas supply (Liquid Air)		74021040
Software modules (optional)		
Software module CAN bus CAN bus interface for integration in CORE		2235101
Software module BABY MODE BABY MODE for special use in pediatrics		2235102
Software module VIDEO DISPLAY: video display using DIALOG via CAN bus		2235103

III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA

## INSUFFLATOR HIGHFLOW 45 EVAC + HEAT


Insufflator 45 EVAC + HEAT	2235031
Device properties	
Operating mode	Continuous operation
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100-127/220-240 V~, 50/60 Hz
Power consumption	80 VA
Current rating	0.8-0.3 A
Fuse	T 3.15 AH 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	
Electromagnetic compatibility (EMC)	IEC/EN 60601-1-2
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights	
Weight	11.0 kg (23.3 lbs)
Dimensions (W x H x D)	300 x 160 x 455 mm

Relevant application parameters		
Insufflation medium	Medical-grade CO <sub>2</sub> (degree of purity > 99.5%)	
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg	
Gas flow rate primary filling	1 I/min (± 50%)	
Gas flow rate, High Flow	2 I/min to 45 I/min (± 20%) selectable in increments of 1 I/min	
Consumption indicator	0   to 9,999   (± 20%)	

# WOLF

spirit of excellence

## LAPARO-CO<sub>2</sub>-PNEU 2233

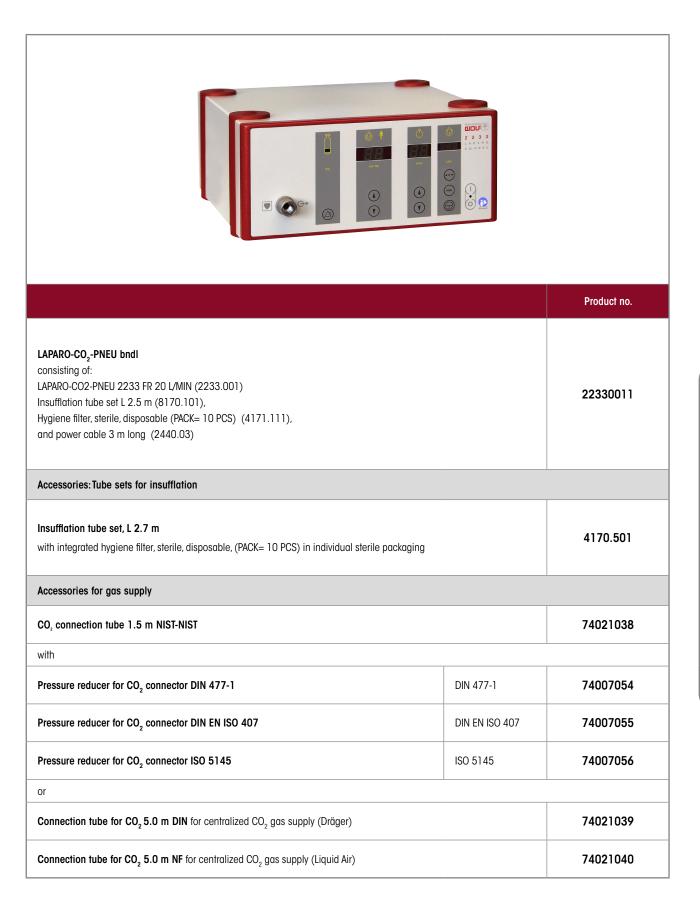



III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA

# LAPARO-CO<sub>2</sub>-PNEU 2233

LAPARO-CO <sub>2</sub> -PNEU 2233	2233.001
Device properties	
Operating mode	Continuous operation
Operating conditions	$+10^{\circ}\text{C}$ to $+40^{\circ}\text{C}$ , 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Storage and transport conditions	-20°C to +60°C, 10% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply	
Mains + frequency	100–230 V~, 50/60 Hz
Power consumption	80 VA
Current rating	0.8 A
Fuse	T 2 AL 250 V
Regulatory standards	
Protection class to IEC/EN 60601-1 (UL 60601-1/CSA C222 No6011 – for USA)	I
Electromagnetic compatibility (EMC)	EN/IEC 6060112
Medical Devices Directive 93/42/EEC	Class IIb
Protection against electric shock	Type CF applied part
Degree of protection against the ingress of liquids	IP 20 (not protected)
Degree of protection in the presence of flammable mixtures	Device is not protected against explosions (do not operate this device in explosive atmospheres)
Maximum suction vacuum	-60 kPa
Dimensions and weights	
Weight	9.5 kg
Dimensions (W x H x D)	330 mm x 155 mm x 390 mm

Relevant application parameters	
Insufflation medium	Medical-grade CO <sub>2</sub> (degree of purity > 99.5%)
Intraabdominal pressure	3 mmHg to 25 mmHg (± 2 mmHg) selectable in increments of 1 mmHg
Gas flow rate primary filling	1 I/min (± 50%)
Gas flow rate, High Flow	2 I/min to 20 I/min (± 20%) selectable in increments of 1 I/min
Consumption indicator	0   to 9,999   (± 20%)



## STERILE SMOKE


### FOR SMOKE GAS DISCHARGE





## FLUID CONTROL 2225

### SUCTION IRRIGATION PUMP

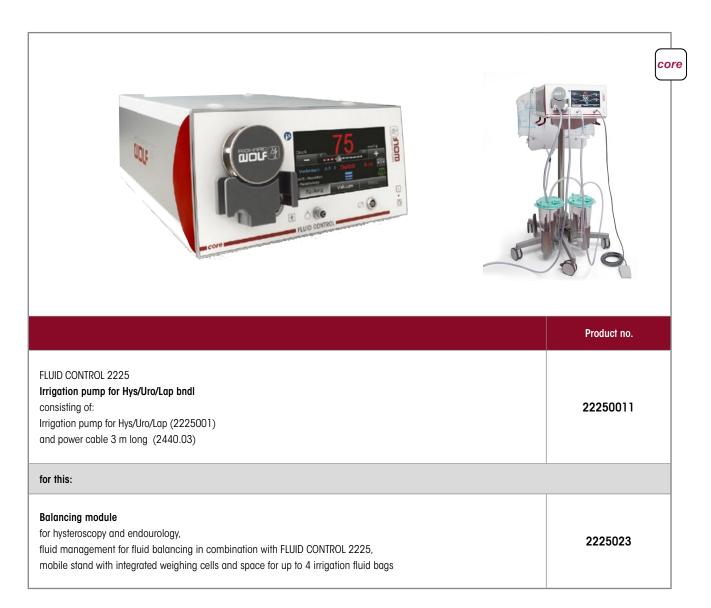

Accessories		Product no.
Footswitch	only for use in urology and within the indication TUR/enucleation, possibility of short-term increase in pressure if visibility is poor (Flush function)	2204901



# FLUID CONTROL 2225

### SUCTION IRRIGATION TUBE SETS

Irrigation Product no.			Product no.
Accessories – reusable	Tube set with piercing spike	with Luer-Lock connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
	Irrigation tube set with piercing spike, L 3 m	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product	4171223
	Tube set with CARE-LOCK, L 3 m	(PACK= 10 PCS), sterile, disposable product	4171224
Accessories	Suction irrigation tube set	(PACK= 10 PCS), with piercing spike, sterile disposable product, PVC	4171225
– disposable	Day irrigation tube set	(PACK= 10 PCS), sterile, disposable product, PVC	4171226
	Patient irrigation tube set, sterile	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product, PVC	4171227
	Note: Day tube and patient tube can only be us the day tube can be used for up to 20 patients	sed together. A new patient tube is required for each patient;	

Suction			Product no.
Accessories – reusable	Tube set for vacuum, incl. filter	with integrated hygiene filter, PACK= 10 PCS, service life: 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with Luer-Lock, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container, 2 I	2 liters, with lid	8170.655
	Secretion container, 2 I	2 liters, no lid	8170.6551
Accessories – disposable	Secretion container, 2.5 I	2.5 liters	41706566
	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PACK= 90 PCS) (41706564)	4170657
	Tube set for suction (2 connections)	sterile, disposable product, (PACK= 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PACK= 10 PCS) For connecting vacuum tube 2206207 to disposable container systems	0771019



# FLUID CONTROL 2225

## CABLE ACCESSORIES

		Product no.
Patch cable, RJ45 SFTP, 0.5 m	Cable length 0.5 m	72325378
Patch cable, RJ45 HRS TM11, 1.0 m	Cable length 1.0 m	72325429
Patch cable, RJ45 S/FTP CAT6 10 m	Cable length 10 m	72325434
Plastic caps for network socket	(PACK= 8 PCS)	5592105
Power cable	Cable length 3 m	2440.03



# TECHNICAL DATA FLUID CONTROL 2225

FLUID CONTROL 2225		2225001
Device properties		
Operating conditions		+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level
Storage and transport con	ditions	-20°C to +60°C , 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure
Power supply		
Mains + frequency		100–240 V~, 50/60 Hz
Day or acres mention	100 V/60 Hz	110 VA
Power consumption	240 V/50 Hz	120 VA
Current rating	100 V/60 Hz	1.10 A
Current rating	240 V/50 Hz	0.50 A
Fuse		T 3.15 AH, 250 V
Regulatory standards		
Protection class (I, II)		T. C.
Electromagnetic compatibility (EMC)		EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2
Medical Devices Directive 93/42/EEC		Class IIb
Housing protection rating	(IP code)	IP21
Protection against electric	shock	Type BF applied part
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)
Maximum suction vacuum		-60 kPa
Dimensions and weights		
Weight		8.8 kg
Dimensions (W x H x D)		300 mm x 157 mm x 436 mm

Relevant application parameters		
	Hysteroscopy: 800 ml/min (max. flow, not adjustable)	
Nominal flow range	Endourology: 10–800 ml/min (max. flow)	
	Laparoscopy: 0.1–1.8 I/min (max. flow)	
Suction power	max. 2 I/min	
	Hysteroscopy: 15–200 mmHg	
Starting nominal pressure range	Endourology: 15–90 mmHg/20–120 cmH2O	
	Laparoscopy: 300 mmHg (not adjustable)	
Pressure	0–300 mmHg	
Deficit	-9,990 to +9,990 ml/0 to 99.9 l	

III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# TECHNICAL DATA FLUID CONTROL 2225

Balancing module	2225023	
Device properties		
Operating conditions	+10°C to +40°C, 30% to 75% rel. humidity, 70 to 106 kPa atmospheric pressure 3,000 m max. altitude above sea level	
Storage and transport conditions	-20°C to +60°C , 10% to 90% rel. humidity 70 to 106 kPa atmospheric pressure	
Regulatory standards		
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1 EN 60601-1-2/IEC 60601-1-2	
Housing protection rating (IP code)	IP21	
Maximum load of container scale	16 kg/4 containers of 3 I each	
Maximum load of bag scale	23 kg/4 bags of 5 I each	
Dimensions and weights		
Weight	15.4 kg	
Dimensions (W x H x D)	618 mm x 1,064 mm x 618 mm	

Footswitch	2204901	
Power supply		
Power supply connection	max. 24 V	
Power consumption	max. 0.1 A	
Regulatory standards		
Electromagnetic compatibility (EMC)	EN 60601-1/IEC 60601-1	
Housing protection rating (IP code)	IPX8	
Plug	7-pin circular connector	
Cable length	4.5 m	
Dimensions and weights		
Weight	300 g	
Dimensions (W x H x D)	66 mm x 27 mm x 91 mm	

# FLUID CONTROL LAP 2216



Accessories		Product no.
Bracket	for fixing the suction container on the irrigator stand or MUT cart	2215.992
Universal holder	for FLUID CONTROL LAP on RIWOmobil	32114605

# WOLF

spirit of excellence

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# LAP SUCTION IRRIGATION PUMP 2216

## SUCTION IRRIGATION TUBE SETS

Irrigation			Product no.
Accessories – reusable	Tube set with piercing spike	with Luer-Lock connection, autoclavable, incl. 10 spare membranes, reusable for 20 reprocessing cycles	8171223
	Irrigation tube set with piercing spike, L 3 m	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product	4171223
	Tube set with CARE-LOCK, L 3 m	(PACK= 10 PCS), sterile, disposable product	4171224
Accessories	Suction irrigation tube set	(PACK= 10 PCS), with piercing spike, sterile disposable product, PVC	4171225
– disposable	Day irrigation tube set	(PACK= 10 PCS), sterile, disposable product, PVC	4171226
	Patient irrigation tube set, sterile	(PACK= 10 PCS), with Luer-Lock connection, sterile, disposable product, PVC	4171227
	Note: Day tube and patient tube can only be us the day tube can be used for up to 20 patients	sed together. A new patient tube is required for each patient;	

Suction			Product no.
Accessories – reusable	Tube set for vacuum, incl. filter	with integrated hygiene filter, PACK= 10 PCS, service life: 30 days (connected to irrigation pump)	2206207
	Irrigation tube	L 1.2 m, with Luer-Lock, for suction irrigation handle 8385.901 and tube set 8171223 or 8170.223	817123
	Suction tube L 3 m	for suction irrigation handle 8385.901	8171402
	Secretion container, 2 I	2 liters, with lid	8170.655
	Secretion container, 2 I	2 liters, no lid	8170.6551
Accessories – disposable	Secretion container, 2.5 I	2.5 liters	41706566
	Secretion container bndl consisting of:	Secretion container 2.5 I (41706566) and secretion bag (PACK= 90 PCS) (41706564)	4170657
	Tube set for suction (2 connections)	sterile, disposable product, (PACK= 10 PCS) for connecting instruments to collecting container	T0503-01
	Angled 90° plug-in coupling	(PACK= 10 PCS) For connecting vacuum tube 2206207 to disposable container systems	0771019

# TECHNICAL DATA FLUID CONTROL LAP 2216


LAP suction irrigation pu	mp	2216001
Device properties		
Operating conditions		+10°C to +40°C, 30% to 75% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa 3,000 m max. altitude above sea level
Storage conditions		$+5^{\circ}\text{C}$ to $+40^{\circ}\text{C}$ , $5\%$ to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Transport and shipping co	nditions	-20°C to +60°C, 5% to 90% rel. humidity, atmospheric pressure 700 hPa to 1,060 hPa
Power supply		
Mains + frequency		100–240 V~, 50/60 Hz
Device consumption	100 V/60 Hz	65 VA
Power consumption	240 V/50 Hz	96 VA
0 1 1	100 V/60 Hz	0.65 A
Current rating	240 V/50 Hz	0.42 A
Protection class		I
Electromagnetic compatib	pility (EMC)	IEC 60601-1/EN 60601-1 IEC 60601-1-2/EN 60601-1-2
Medical Devices Directive	93/42/EEC	Class IIa
Protection against electric shock		Type BF applied part
Degree of protection against the ingress of liquids		IP 41
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)
Dimensions and weights		
Weight		4 kg
Dimensions (W x H x D) with toggle screw		140 mm x 210 mm x 295 mm

Relevant application parameters		
Maximum delivery rate	Rinsing: 2.0 I/min (± 10%), suction: 2.0 I/min (+0.4/-0.1 I/min)	
Maximum pump pressure	400 mmHg (± 50 mmHg)	
Motor cut-out	500 mmHg after 5 s (± 25 mmHg)	
Suction pressure	between -50 kPa and -60 kPa	
Connections	Equipotential bonding, vacuum connection	

# RICHARD FILMIF

spirit of excellence

## HF GENERATOR 2260

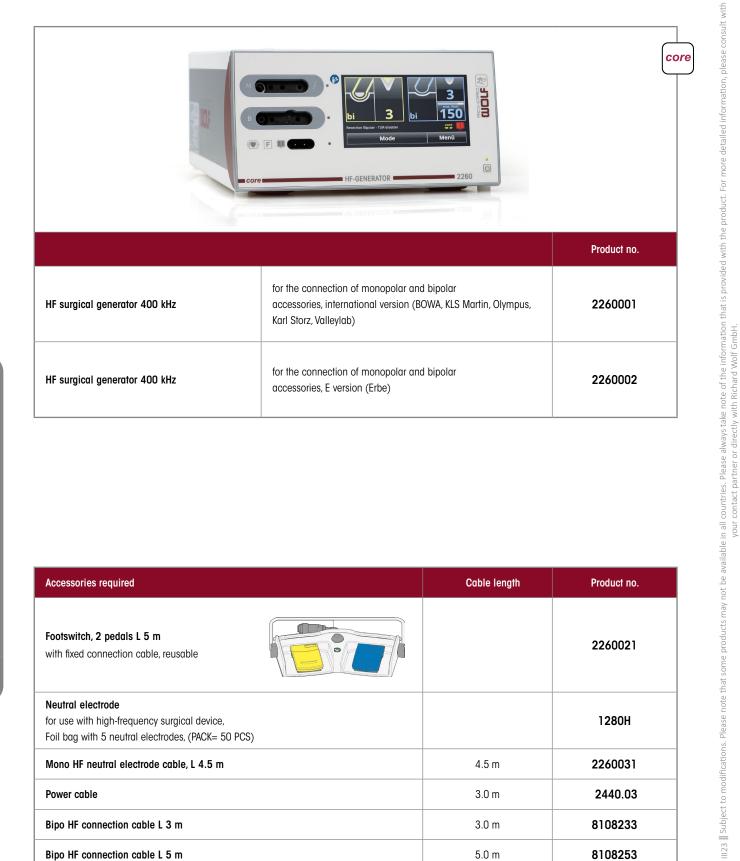

Accessories required	Cable length	Product no.
Footswitch, 2 pedals L 5 m with fixed connection cable, reusable		2260021
Neutral electrode for use with high-frequency surgical device, Foil bag with 5 neutral electrodes, (PACK= 50 PCS)		1280H
Mono HF neutral electrode cable, L 4.5 m	4.5 m	2260031
Power cable	3.0 m	2440.03
Bipo HF connection cable L 3 m	3.0 m	8108233
Bipo HF connection cable L 5 m	5.0 m	8108253

# HF GENERATOR 2260

# TECHNICAL DATA

HF surgical generator 40	OOkHz	2260001/2260002		
Device properties				
Type of controls on housi	ng front	Touch panel		
	max.cutting power	400 W		
Output power	max.coagulation power	350 W		
LF and HF leakage currents		acc. to DIN EN 60601 1 and DIN EN 60601 2 2		
Signal level		HF indicator 55 dB(A); adjustable 45–60 dB(A) Alarm 65 dB(A)		
Operating conditions		+10°C to +40°C, 30% to 75% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure		
Storage and transport co	nditions	- 20°C to + 60°C, 10% to 90% rel humidity, 700 hPa to 1,060 hPa atmospheric pressure		
Power supply				
Mains + frequency		100–240 V~, 50/60 Hz		
Day on a suppose the suppose t	without HF output	45 VA		
Power consumption	at max. output power	650 VA		
Current rating		max. 6.3 A		
Fuse		T 6.3 AH 250 V		
Regulatory standards				
Protection class to EN/IEC (UL 2601-1/CSA C222 No		I		
Electromagnetic compati	bility (EMC)	EN/IEC 60601-1-2		
Medical Devices Directive	e 93/42/EEC	Class IIb		
Degree of protection aga (DIN EN/IEC 60529)	inst the ingress of liquids	IPXO		
Degree of protection aga	inst the ingress of solids	IP2X		
Duty factor (duty cycle D0	2)	Intermittent INT 10 s/30 s corresponding to 25% DC		
Protection against electric shock		Model CF applied part, defibrillator-proof		
Degree of protection in the presence of flammable mixtures		Device is not protected against explosions (do not operate this device in explosive atmospheres)		
Dimensions and weights	S	The state of the s		
Weight		10.2 kg (22.4 lbs)		
Dimensions (W x H x D)		300 x 159 x 419 mm		

III23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

# HF CONNECTION CABLE MONO 815xxx

Instrument connector	Device connector		Product no.
WOLF resectoscope		HF connection cable mono L 3 m	815.032
	Erbe (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	815.052
0		HF connection cable mono L 3 m	815.132
	Erbe (T series)	HF connection cable mono L 5 m	815.152
HF electrodes,		HF connection cable mono L 3 m	815.031
monopolar	Martin (M-version)/Berchtold/ Aesculap	HF connection cable mono L 5 m	815.051
		HF connection cable mono L 3 m	815.033
	Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.053
		HF connection cable mono L 3 m	815.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 5 m	815.054



# HF CONNECTION CABLE MONO 8106xxx

Instrument connector	Device connector		Product no.
WOLF Instruments/surgical generator		HF connection cable mono L 3 m	8106.032
	Erbe (ACC/ICC/VIO)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260002	HF connection cable mono L 5 m	8106.052
76	220002	HF connection cable mono L 3 m	8106.132
	Erbe (T series)	HF connection cable mono L 5 m	8106.152
	Martin (M-version)/Berchtold/ Aesculap  Bovie/Valleylab/Erbe (Int.)/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001	HF connection cable mono L 3 m	8106.031
HF electrodes, monopolar		HF connection cable mono L 5 m	8106.051
		HF connection cable mono L 3 m	8106.033
		HF connection cable	8106.053
	DOWN A LITTLE	HF connection cable mono L 3 m	8106.034
	BOWA (Int./EU) Eschmann and other devices with 4 mm plugs R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable mono L 5 m	8106.054



# BIPO HF CONNECTION CABLE 8108xxx

Instrument connector	Device connector		Product no.
WOLF Bipolar forceps			8108.032
(9)	Erbe (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo, L 5 m	8108.052
		HF connection cable bipo, L 3 m	8108.033
	Martin (Int.)/2 pin Valleylab/ BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo, L 5 m	8108.053
		HF connection cable bipo, L 3 m	8108.031
	WOLF/Martin (M-version)/Berchtold/ Aesculap	HF connection cable bipo, L 5 m	8108.051
	EMC Dolley	HF connection cable bipo, L 3 m	8108035



# BIPO HF CONNECTION CABLE 8108XXX

Instrument connector	Device connector		Product no.
Bipolar tweezers connection	(D)	HF connection cable bipo, L 3 m	8108.132
RECOT	Erbe (ACC/ICC/T)/BOWA (EU) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo, L 5 m	8108.152
		HF connection cable bipo, L 3 m	8108.133
	Martin (Int.)/ 2 pin Valleylab/BOWA (Int.) R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo, L 5 m	8108.153
		HF connection cable bipo, L 3 m	8108.131
	Martin (M-version)/Berchtold/ Aesculap	HF connection cable bipo, L 5 m	8108.151
	EMC Dolley	HF connection cable bipo, L 3 m	8108135
WOLF S(a)line resectoscope/	Erbe VIO 300D	Bipolar cable; TUR/TCR; WOLF MF plug; L 4 m	20196-119
	Erbe VIO 3	BIPOLAR CABLE; MF-U MF plug; L 4.5 m	21196-119
,		HF connection cable bipo, L 3 m	8108.231
	KLS Martin	HF connection cable bipo, L 5 m	8108.251
		HF connection cable bipo, L 3 m	8108233
	R. Wolf HF surgical generator 400 kHz 2260001/2260002	HF connection cable bipo, L 5 m	8108253



# MONO HF NEUTRAL ELECTRODE CABLE

Instrument connector	Device connector		Product no.
2-pole neutral electrode		Mono HF neutral electrode cable, L 4.5 m	2260031
	R. Wolf HF surgical generator 400 kHz 2260001/2260002		



# FLEXIBLE FIBER CHOLEDOCHOSCOPE 5 MM CHANNEL 2.5 MM



	Outer Ø	Working channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction – articulation upward	Product no.
Fiber cystoscope 15 FR WL 400 mm				•		7305.001
Slanted distal tip Articulation +210°/-150° Direction of view 0°, viewing angle 110°	5 mm 15 Fr	25 mm 75 Fr	400 mm		•	7305.006
Fiber cystoscope bndl consisting of: Fiber cystoscope 15 FR WL 400 mm ( Adapter with 2 irrigation valves and 1 Leakage tester for flex. endoscopes (1 Pressure equalization valve (163.904 Cleaning brush Ø 3 mm,TL 1,200 mm	instrument po 63.903)	`	•	•		730500111
Fiber cystoscope bndl consisting of: Fiber cystoscope 15 FR WL 400 mm (7305.006) Adapter with 2 irrigation valves and 1 instrument port (7305.782) Leakage tester for flex. endoscopes (163.903) Pressure equalization valve (163.904) Cleaning brush Ø 3 mm, TL 1,200 mm (PACK= 10 PCS) (7990002)				•	730500611	

Recommended accessories		Product no.
Fiber light cable bndl consisting of: Fiber light cable Ø 2.5 mm TL 2.3 m (80662523), projector-side adapter (8095.07), and endoscope-side adapter (809509)	Ø 2.5 mm, 2.3 m long	806625231



III.23 | Subject to modifications. Please note that some products may not be available in all countries. Please always take note of the information that is provided with the product. For more detailed information, please consult with your contact partner or directly with Richard Wolf GmbH.

Product no.

806625231

Ø 2.5 mm, 2.3 m long

# Mamba

# FLEXIBLE SENSOR ENDOSCOPE FOR USE IN CHOLEDOCHOSCOPY

# FOR ENDOCAM LOGIC 4K CONTROLLER



	Outer Ø	Working channel	WL	Control lever in distal direction – articulation downward	Control lever in distal direction — articulation upward	Product no.
Sensor cystoscope 16.2 Fr WL 400 mm Slanted distal tip	16.2 Fr	2.5 mm	400 mm	•		7315001
Articulation +210°/-210° Direction of view 0°, viewing angle 120°	10.211	7.5 Fr	400 111111		•	7315006
Sensor cystoscope bndl consisting of: Sensor cystoscope 16.2 FR, WL 400 m Leakage tester for flex. endoscopes (1 pressure equalization valve (163.904) Luer sealing cap (15023205), and cleaning brush Ø 5 mm, TL 1,200 mm	63.903), ),	,	5)	•		73150012
Sensor cystoscope bndl consisting of: Sensor cystoscope 16.2 FR, WL 400 mm (7315006) Leakage tester for flex. endoscopes (163.903), pressure equalization valve (163.904), Luer sealing cap (15023205), and cleaning brush Ø 5 mm,TL 1200 mm (PACK= 10 PCS) (7990005)			•	73150062		


Recommended accessories

Fiber light cable bndl consisting of:

(8095.07), and endoscope-side adapter (809509)

Fiber light cable Ø 2.5 mm TL 2.3 m (80662523), projector-side adapter

# TÜBINGER MIC TRAINING DEVICE

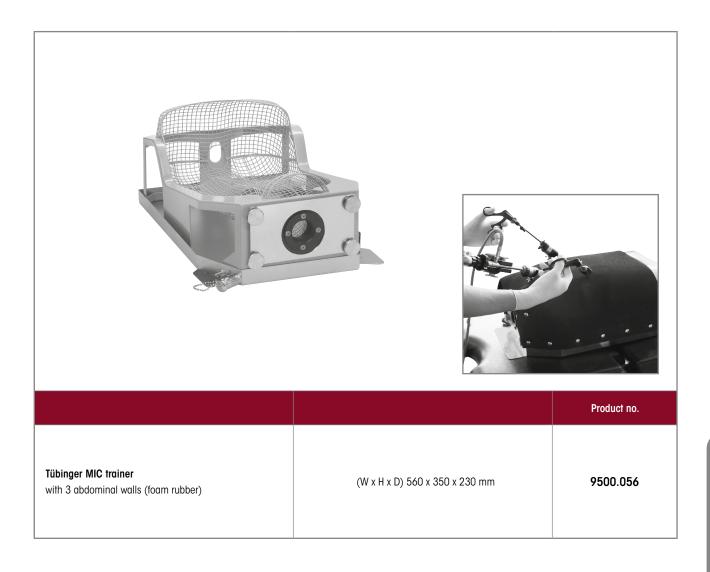

Recommended accessories	Product no.
Abdominal wall, foam rubber, PACK= 5 PCS	9500.0561
Available on request with transportation case	

BDE125 BDE125





Managing Directors: Jürgen Pfab VAT ID no.: DE144521586
Jürgen Steinbeck Tax no.: 48020/00171

